

Ceramic Directional Coupler

DCW-6-722+

50Ω 6 dB Coupling 4400 to 7200 MHz

The Big Deal

- Rugged, ceramic construction
- Industry leading combination of size/bandwidth



CASE STYLE: JC0603C

Product Overview

Mini-Circuits new directional coupler DCW-6-722+ offers an industry leading combination of operating bandwidth and size; The low insertion loss makes this component a versatile building block for use in a variety of systems and sub-system designs.

Key Features

| Feature | Advantages |
|--------------------------|---|
| Small Size | Offered in the JC-0603C package size, the DCW-6-722+ offers an industry leading combination of size, bandwidth and frequency. The small footprint allows for reduced parasitics in systems with improved performance and simplified layout. |
| LTCC Construction | Provides repeatable performance in a rugged, ceramic package well suited for tough environments such as high humidity and temperature extremes. |
| Wrap-around terminations | Provides excellent solderability and easy visual inspection |

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Ceramic Directional Coupler

DCW-6-722+

50Ω 6 dB Coupling 4400 to 7200 MHz



Generic photo used for illustration purposes only

CASE STYLE: JC0603C

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel at no extra cost

| Reel Size | Devices/Reel |
|-----------|-----------------------------------|
| 7" | 20, 50, 100, 200, 500, 1000, 4000 |

Maximum Ratings

Operating Temperature -55°C to 125°C

Storage Temperature -55°C to 125°C


Input Power¹ 1W

Permanent damage may occur if any of these limits are exceeded.
1. Derate linearly 0.5W at 125°C

Pad Connections

| | |
|-------------|-----|
| INPUT | 1 |
| OUTPUT | 4 |
| COUPLED | 6 |
| TERMINATION | 3 |
| GROUND | 2.5 |


Outline Drawing

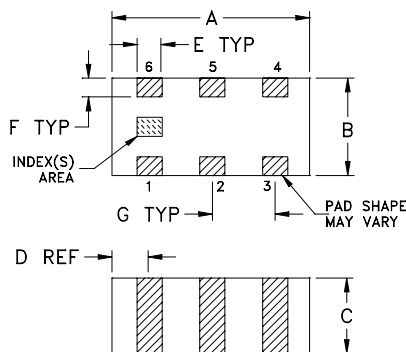

Outline Dimensions (inch/mm)

| A | B | C | D | E | F | G | wt |
|------|------|------|------|------|------|------|-------|
| .063 | .031 | .024 | .012 | .008 | .006 | .020 | grams |
| 1.60 | 0.79 | 0.61 | 0.30 | 0.20 | 0.15 | 0.51 | 0.005 |

Demo Board MCL P/N: TB-DCW-6-722+ Suggested PCB Layout (PL-572)

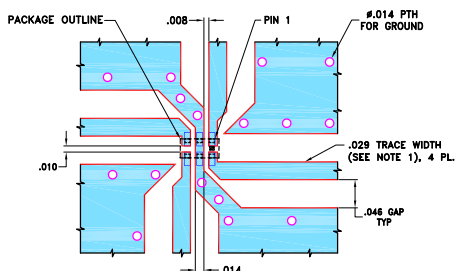

- NOTES:
- TRACE WIDTH & GAP ARE SHOWN FOR FR4, GRADE IT-180TC (ITEQ CORP.) WITH DIELECTRIC THICKNESS .015±.0015. COPPER: 1/2 OZ EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
 - REFER TO MODEL DATASHEET FOR PIN OUTS.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

Features

- Wideband, 4400-7200 MHz
- Excellent return loss for input/output ports ideal for signal-tap
- Ultra small size, 0603 (1.6 x 0.8 mm)
- Temperature stable
- LTCC construction

Applications




- 5G sub 6GHz
- Wi-Fi

Electrical Specifications at 25°C


| Parameter | Frequency (MHz) | Min. | Typ. | Max. | Unit |
|---|-----------------|------|------|------|------|
| Frequency Range | | 4400 | | 7200 | MHz |
| Mainline Loss (Theoretical loss included) | 4400-7200 | — | 1.7 | 2.6 | dB |
| Coupling | 4400-7200 | — | 6.75 | — | dB |
| Coupling Flatness(±) | 4400-7200 | — | 1.3 | — | dB |
| Directivity | 4400-7200 | — | 17 | — | dB |
| Return Loss (Input) | 4400-7200 | 9.5 | 17 | — | dB |
| Return Loss (Output) | 4400-7200 | 9.5 | 17 | — | dB |

Typical Performance Data

| Frequency (MHz) | Mainline Loss (dB) In-Out | Coupling (dB) In-Cpl | Directivity (dB) | Return Loss (dB) | | Cpl |
|-----------------|---------------------------|----------------------|------------------|------------------|-------|-------|
| | | | | In | Out | |
| 4400.00 | 1.75 | 6.63 | 19.99 | 24.59 | 22.22 | 17.49 |
| 4750.00 | 1.83 | 6.47 | 18.42 | 20.36 | 19.89 | 16.77 |
| 5100.00 | 1.90 | 6.40 | 19.53 | 20.89 | 20.59 | 16.80 |
| 5450.00 | 1.94 | 6.41 | 17.97 | 21.04 | 19.12 | 17.00 |
| 5800.00 | 1.88 | 6.45 | 18.49 | 19.50 | 18.63 | 16.56 |
| 6150.00 | 1.82 | 6.59 | 16.73 | 22.18 | 19.84 | 16.37 |
| 6500.00 | 1.81 | 6.84 | 17.63 | 25.95 | 18.76 | 15.95 |
| 6850.00 | 1.69 | 7.09 | 16.55 | 26.87 | 19.86 | 14.88 |
| 7200.00 | 1.57 | 7.49 | 14.60 | 40.27 | 18.13 | 14.59 |

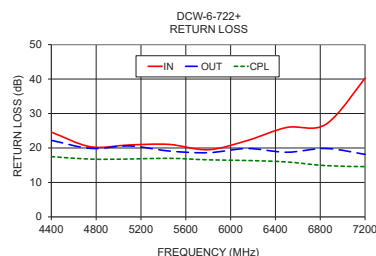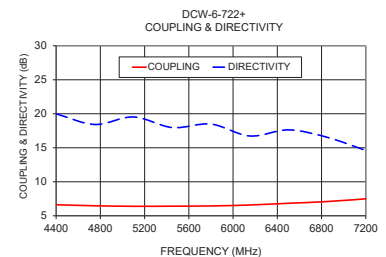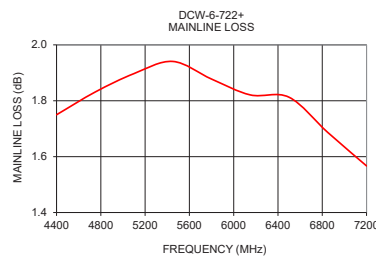

Electrical Schematic



* ELECTRICAL SCHEMATIC FOR DIRECTIONAL COUPLERS REQUIRING EXTERNAL TERMINATION THAT IS DESIGNED WITHOUT INTERNAL TRANSFORMERS.

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. OR
ECO-005228
DCW-6-722+
AVB/CP/AM
201216

Page 2 of 2

Directional Coupler

DCW-6-722+

Typical Performance Data

| FREQUENCY (MHz) | INSERTION LOSS (dB) | COUPLING (dB) | DIRECTIVITY (dB) | RETURN LOSS (dB) | | |
|--------------------|---------------------------|------------------|---------------------|---------------------|-------|-------|
| | | | | IN | OUT | CPL |
| 4200 | 1.70 | 6.73 | 21.18 | 26.11 | 22.83 | 18.20 |
| 4225 | 1.70 | 6.71 | 21.04 | 25.53 | 22.82 | 18.05 |
| 4250 | 1.70 | 6.70 | 20.94 | 25.19 | 22.90 | 18.06 |
| 4275 | 1.71 | 6.69 | 20.85 | 25.35 | 22.91 | 18.01 |
| 4300 | 1.72 | 6.67 | 20.69 | 25.38 | 22.77 | 17.76 |
| 4325 | 1.73 | 6.65 | 20.52 | 24.87 | 22.62 | 17.56 |
| 4350 | 1.73 | 6.64 | 20.37 | 24.57 | 22.59 | 17.62 |
| 4375 | 1.74 | 6.63 | 20.17 | 24.73 | 22.46 | 17.71 |
| 4400 | 1.75 | 6.63 | 19.99 | 24.59 | 22.22 | 17.49 |
| 4750 | 1.83 | 6.47 | 18.42 | 20.36 | 19.89 | 16.77 |
| 5100 | 1.90 | 6.40 | 19.53 | 20.89 | 20.59 | 16.80 |
| 5450 | 1.94 | 6.41 | 17.97 | 21.04 | 19.12 | 17.00 |
| 5800 | 1.88 | 6.45 | 18.49 | 19.50 | 18.63 | 16.56 |
| 6150 | 1.82 | 6.59 | 16.73 | 22.18 | 19.84 | 16.37 |
| 6500 | 1.81 | 6.84 | 17.63 | 25.95 | 18.76 | 15.95 |
| 6850 | 1.69 | 7.09 | 16.55 | 26.87 | 19.86 | 14.88 |
| 7200 | 1.57 | 7.49 | 14.60 | 40.27 | 18.13 | 14.59 |
| 7233 | 1.56 | 7.53 | 14.48 | 36.11 | 18.05 | 14.35 |
| 7267 | 1.56 | 7.57 | 14.20 | 37.54 | 18.06 | 14.20 |
| 7300 | 1.54 | 7.60 | 14.12 | 38.91 | 17.99 | 14.35 |
| 7333 | 1.54 | 7.63 | 13.96 | 35.31 | 17.91 | 14.14 |
| 7367 | 1.54 | 7.67 | 13.59 | 36.13 | 17.92 | 13.94 |
| 7400 | 1.53 | 7.71 | 13.30 | 36.32 | 17.98 | 14.03 |
| 7433 | 1.53 | 7.75 | 12.94 | 33.99 | 18.10 | 13.84 |
| 7467 | 1.52 | 7.80 | 12.49 | 34.74 | 18.16 | 13.62 |
| 7500 | 1.51 | 7.86 | 12.15 | 34.53 | 18.14 | 13.68 |



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com




IF/RF MICROWAVE COMPONENTS

REV. OR
DCW-6-722+
12/14/2020
Page 1 of 1

Directional Coupler


Typical Performance Curves

DCW-6-722+

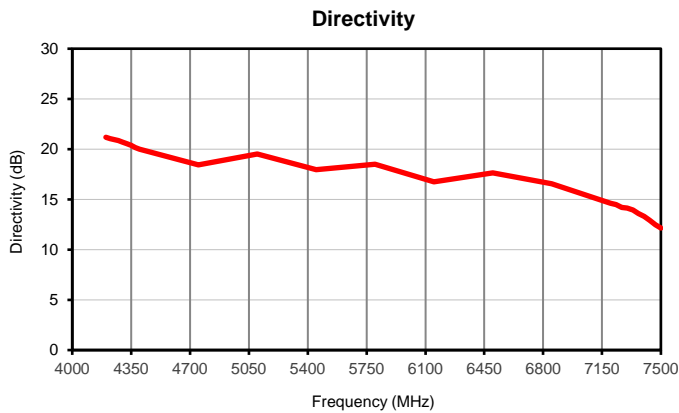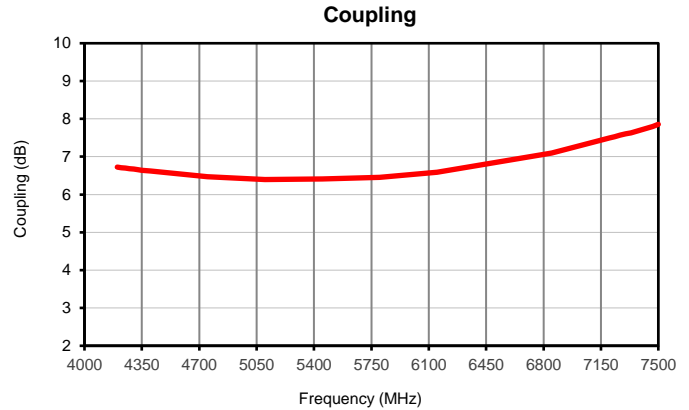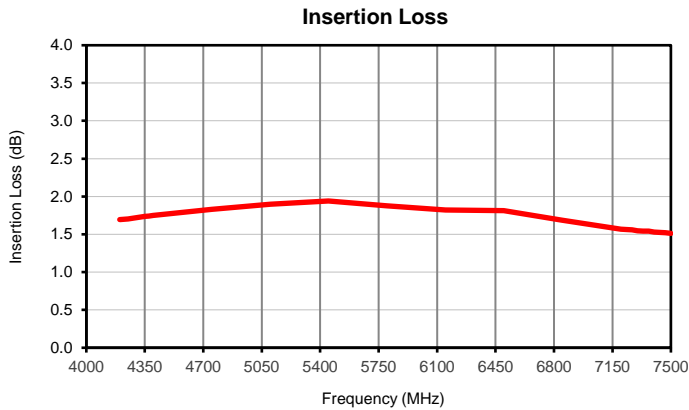


Outline Dimensions

JC0603C

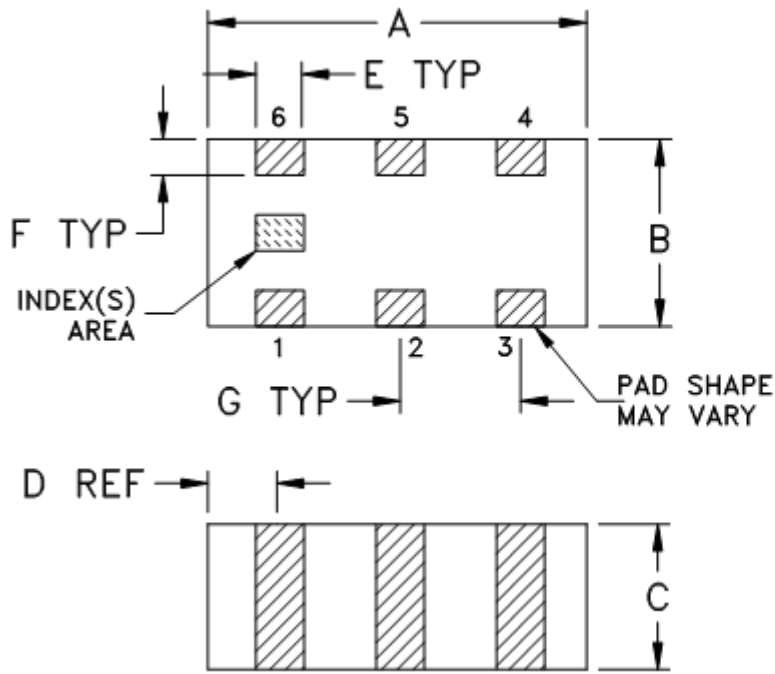

PCB Land Pattern

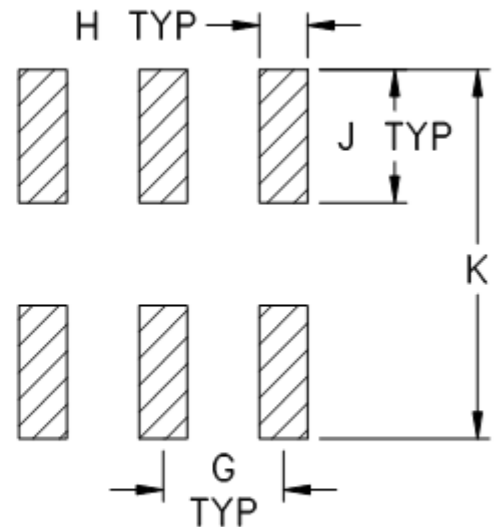

Suggested Layout,
Tolerance to be within $\pm .002$

| CASE # | A | B | C | D | E | F | G | H | J | K | WT. GRAM |
|---------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|-----------------|----------|
| JC0603C | .063 (1.60) | .031 (0.80) | .024 (0.60) | .012 (0.30) | .008 (0.20) | .006 (0.15) | .020 (0.50) | .010 (0.25) | .022 (0.55) | 0.053 (1.35) | .005 |

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

- Open style, ceramic base.
- Termination finish:
For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

Tape & Reel Packaging TR-F114

DEVICE ORIENTATION IN T&R

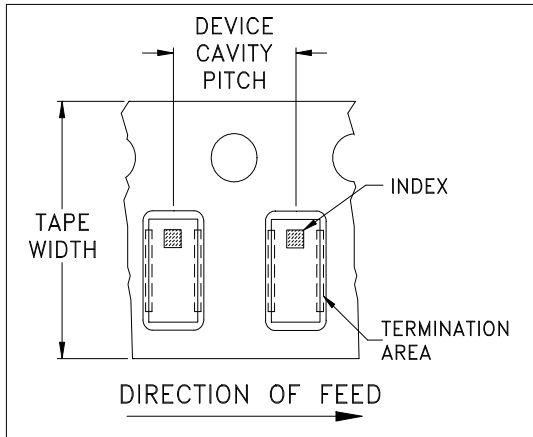


ILLUSTRATION 1

| Applicable Case Styles | |
|------------------------|-----------|
| GE0805C | JC0603C |
| GE0805C-1 | JC0603C-4 |
| GE0805C-1AP | JC0603C-6 |
| GE0805C-7 | |
| GE0805C-9 | |
| GE0805C-10 | |
| GE0805C-11 | |
| GE0805C-12 | |

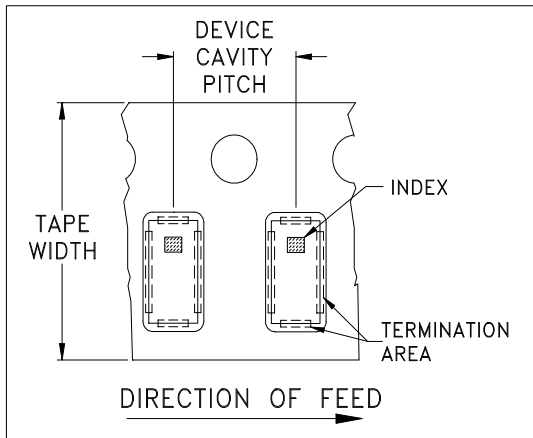


ILLUSTRATION 2

| Applicable Case Styles | |
|------------------------|-----------|
| GE0805C-2 | JC0603C-1 |
| GE0805C-3 | JC0603C-2 |
| GE0805C-4 | JC0603C-3 |
| GE0805C-5 | JC0603C-5 |
| GE0805C-6 | JC0603C-7 |
| GE0805C-8 | JV1210C-1 |
| GE0805C-15 | |

| Tape Width, mm | Device Cavity Pitch, mm | Reel Size, inches | Devices per Reel | |
|----------------|-------------------------|-------------------|-------------------------------------|------|
| 8 | 4 | 7 | Small quantity standards (see note) | 20 |
| | | | | 50 |
| | | | | 100 |
| | | | | 200 |
| | | | | 500 |
| | | | | 1000 |
| | | | Standard | 4000 |

Note: Please Consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION

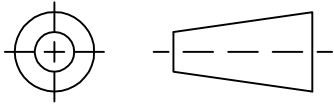

REVISIONS

| REV | ECN No. | DESCRIPTION | DATE | DR | AUTH |
|-----|---------|-------------|----------|----|------|
| OR | M168200 | NEW RELEASE | 05/31/18 | NP | SL |
| | | | | | |
| | | | | | |

**SUGGESTED MOUNTING CONFIGURATION
FOR JC0603C CASE STYLE, "06DC12" PIN CODE**

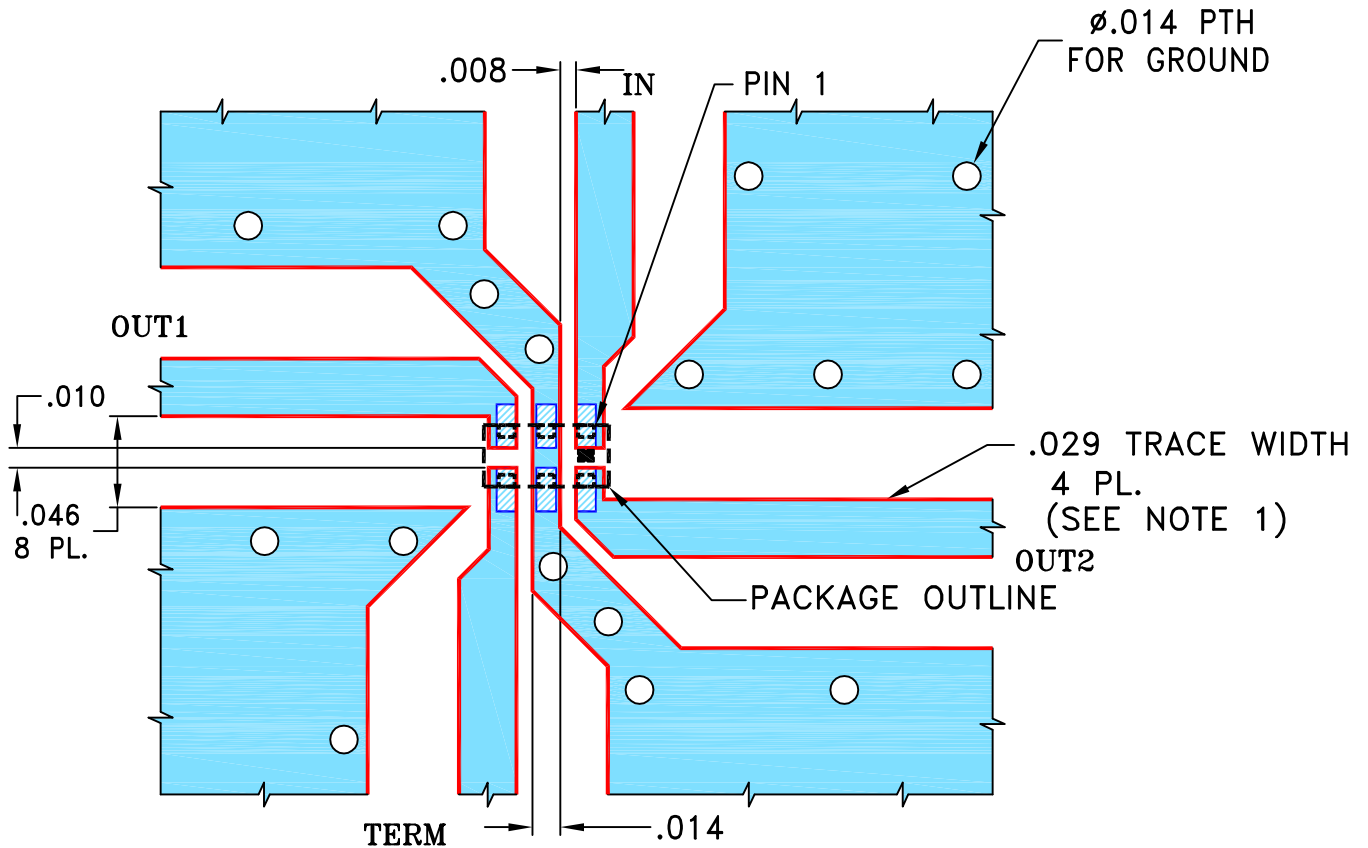

NOTES:

1. TRACE WIDTH IS SHOWN FOR FR4, GRADE IT-180TC (ITEQ CORP.) WITH DIELECTRIC THICKNESS $.016 \pm .0015$. COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

| UNLESS OTHERWISE SPECIFIED | INITIALS | DATE |
|----------------------------|----------|----------|
| DRAWN | NP | 05/30/18 |
| CHECKED | GF | 05/30/18 |
| APPROVED | SL | 05/31/18 |


Mini-Circuits® 13 Neptune Avenue
Brooklyn NY 11235

PL, 06DC12, JC0603C, TB-1031+


| | | | |
|------------------|---------------------|--------------------------|------------|
| SIZE A | CODE IDENT 15542 | DRAWING NO: 98-PL-572 | REV: OR |
| FILE: 98PL572 | SCALE: 10:1 | SHEET: 1 OF 1 | |

Mini-Circuits®
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.
ASHEETA1.DWG REV:A DATE:01/12/95

Evaluation Board and Circuit

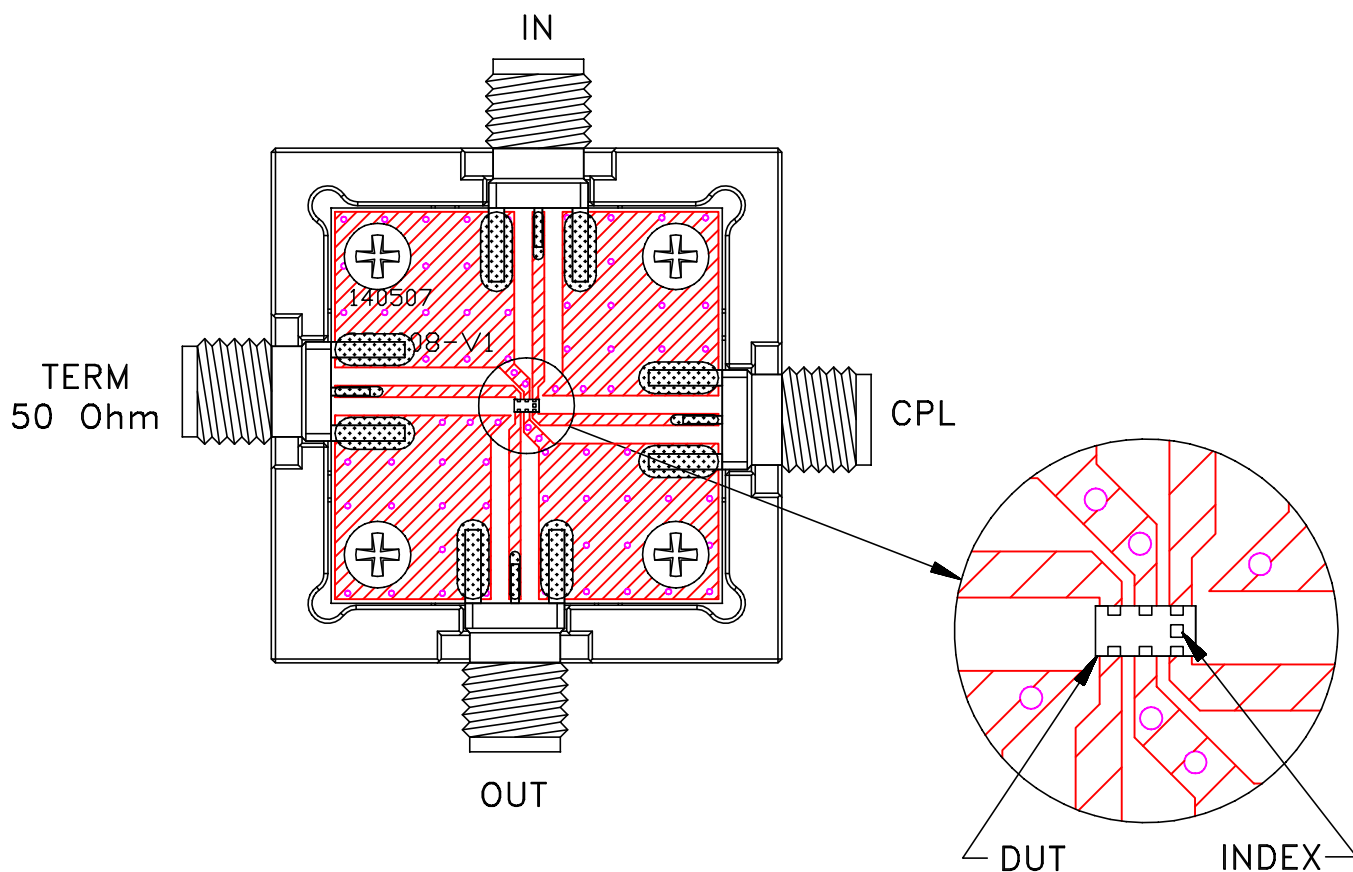


TB-DCW-6-722+

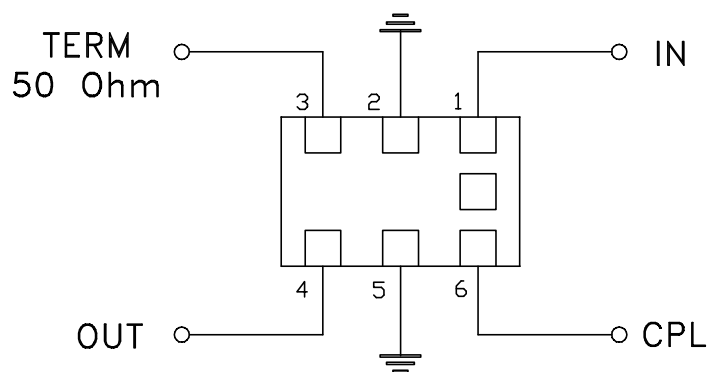

Schematic Diagram

Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: FR4 or equivalent,
Dielectric Constant=4.5, Thickness=.016 inch.

 **Mini-Circuits®**

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

| Specification | Test/Inspection Condition | Reference/Spec |
|----------------------------|---|--|
| Operating Temperature | -55° to 100°C Ambient Environment | Individual Model Data Sheet |
| Storage Temperature | -55° to 100° C Ambient Environment | Individual Model Data Sheet |
| Humidity | 90 to 95% RH, 240 hours, 50°C | MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours |
| Solder Reflow Heat | Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak | J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1 |
| Solderability | 10X Magnification | J-STD-002, Para 4.2.5, Test S, 95% Coverage |
| Vibration (High Frequency) | 20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36) | MIL-STD-202, Method 204, Condition D |
| Mechanical Shock | 50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes | MIL-STD-202, Method 213, Condition A |