



MMIC DIE

Gain Equalizer


EQY-18-24-D+

Mini-Circuits

50Ω 6 to 18 GHz

THE BIG DEAL

- 18 dB Slope
- Insertion Loss, 20.4 dB Typ. at 6 GHz
- Insertion Loss, 2.2 dB Typ. at 18 GHz
- Return Loss, 20 dB Typ.



+RoHS Compliant
 The +Suffix identifies RoHS Compliance.
 See our website for methodologies and qualifications

SEE ORDERING INFORMATION ON THE LAST PAGE

APPLICATIONS

- Test and Measurement
- EW, Radar, and ECM Defense Systems
- Back Haul Radio

PRODUCT OVERVIEW

Mini-Circuits' EQY-18-24-D+ is a MMIC Gain Equalizer fabricated using highly repeatable GaAs IPD MMIC process incorporating resistors, capacitors, and inductors to accomplish a positive Insertion Loss Slope vs. Frequency. EQY-18-24-D+ has a nominal Insertion Loss Slope of 18 dB across the wide bandwidth of 6 to 18 GHz and can be applied to compensate for the negative Gain Slope of amplifiers to achieve relative Gain Flatness for the overall system.

KEY FEATURES

Features	Advantages
Positive Insertion Loss Slope vs. Frequency	Useful for compensating negative Gain Slope of amplifiers, filter effects in receivers, and transmitters to achieve Flat Gain versus Frequency.
Wideband Operation, 6 to 18 GHz	Supports a wide array of applications including Test & Measurement, EW, Radar, and ECM Defense Systems, and Back Haul radio.
Excellent Power Handling Capability	Enables its use at the output of a variety of amplifiers.
Unpackaged Die	Enable user to integrate it directly into hybrids.



MMIC DIE

Gain Equalizer

EQY-18-24-D+

Mini-Circuits

50Ω 6 to 18 GHz

ELECTRICAL SPECIFICATIONS¹ AT 25°C, 50Ω, UNLESS OTHERWISE NOTED.

Parameter	Condition (GHz)	Min.	Typ.	Max.	Units
Frequency Range		6		18	GHz
Insertion Loss	6	-	20.4	-	dB
	10	-	13.5	-	
	14	-	6.7	-	
	16	-	4.1	-	
	18	-	2.2	-	
VSWR	6-10	-	1.11	-	:1
	10-14	-	1.13	-	
	14-16	-	1.17	-	
	16-18	-	1.35	-	

1. Die is soldered in a 16L 3x3mm package and measured on Mini-Circuits Characterization Test Board TB-EQY-18-24C+. See Characterization & Application Circuit (Fig.1).

MAXIMUM RATINGS²

Parameter	Ratings
Operating Case Temperature	-55°C to +105°C
Storage Temperature	-65°C to +150°C
RF Input Power ³	+33 dBm (5 minute max) +30 dBm (continuous)

2. Permanent damage may occur if any of these limits are exceeded.

3. Derates linearly to +29 dBm at +105°C



MMIC DIE


Gain Equalizer

EQY-18-24-D+

Mini-Circuits

50Ω 6 to 18 GHz


SIMPLIFIED SCHEMATIC

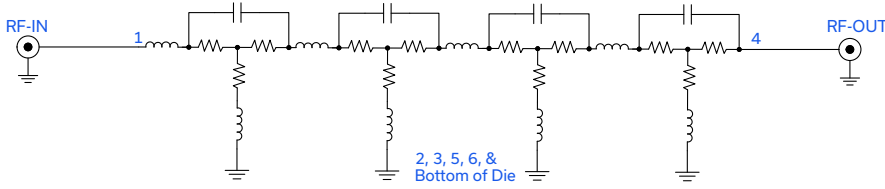

PAD DESCRIPTION

Function	Pad Number	Description
RF-IN	1	RF-Input Pad
RF-OUT	4	RF-Output Pad
GND	2, 3, 5, 6, & Bottom of the die.	The bond pads are connected to back-side through vias and do not require wire-bond connections to ground.

BONDING PAD POSITION

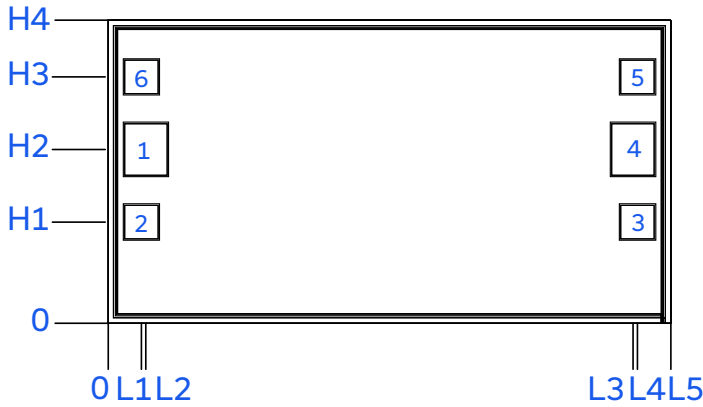

DIE DIMENSIONS IN μm, TYP.

L1	L2	L3	L4	L5
92	104	1446	1459	1550

H1	H2	H3	H4
279	479	679	835

Thickness	Die size	Pad Size 1 & 4	Pad Size 2,3,5 & 6
100	1550 x 835	117 x 142	92 x 92

CHARACTERIZATION & APPLICATION CIRCUIT

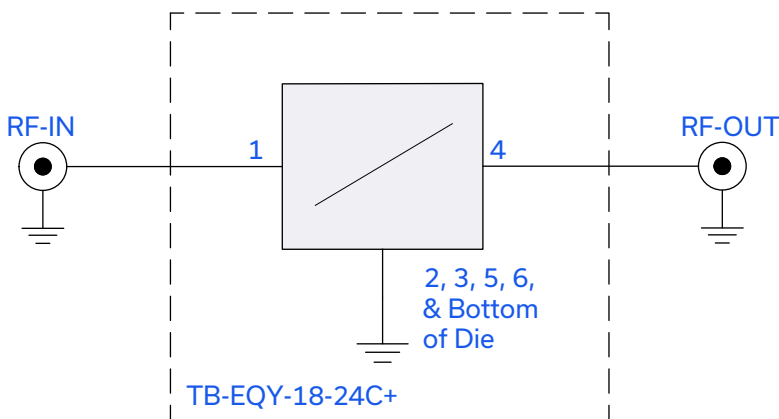


Fig 1. Characterization & Application Circuit

Note: This block diagram is used for characterization. (DUT is soldered into a 16L 3x3mm package and measured on Mini-Circuits characterization test board TB-EQY-18-24C+. Insertion loss and Return Loss are measured using Keysight N5245A PNA-X Microwave Network Analyzer.

Condition:
Insertion Loss & Return Loss: Pin = 0 dBm



MMIC DIE


Gain Equalizer

EQY-18-24-D+


Mini-Circuits

50Ω 6 to 18 GHz

ASSEMBLY DIAGRAM

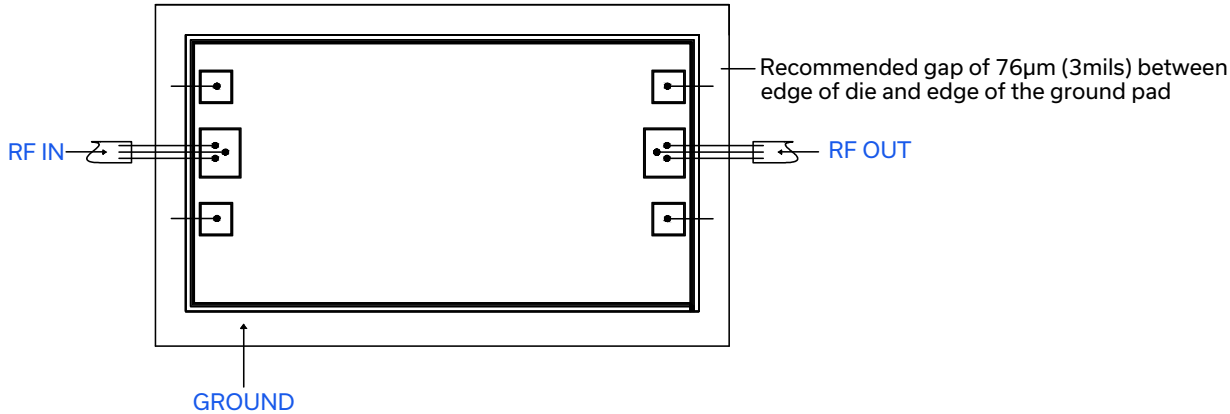

ASSEMBLY PROCEDURE

- Storage**
Die should be stored in a dry nitrogen purged desiccators or equivalent.
-  **ESD**
MMIC Equalizer die are susceptible to electrostatic and mechanical damage. Die are supplied in antistatic protected material, which should be open in clean room conditions at an appropriately grounded anti-static workstation.
- Die Handling and Attachment**
Devices need careful handling using correctly designed collets, it is recommended to handle the chip along the edges with a custom design collet. The die mounting surface must be clean and flat. Using conductive silver filled epoxy, recommended epoxies are Ablestik 84-1 LMISR4 or equivalents. Apply sufficient epoxy to meet required epoxy bond line thickness, epoxy fillet height and epoxy coverage around total periphery. Parts shall be cured in a nitrogen filled atmosphere per manufacturer's cure condition. The surface of the chip has exposed air bridges and should not be touched with vacuum collet, tweezers or fingers.
- Wire Bonding**
Bond pad openings in the surface passivation above the bond pads are provided to allow wire bonding to the die gold bond pads. Thermo-sonic bonding is used with minimized ultrasonic content. Bond force, time, ultrasonic power and temperature are all critical parameters. Suggested wire is pure gold, 1mil diameter. Bonds must be made from the bond pads on the die to the packaged or substrate. All bond wire length and bond wire height should be kept as short as possible unless specified by the Assembly Drawing to minimize performance degradation due to undesirable series inductance.

 Mini-Circuits



MMIC DIE

Gain Equalizer


EQY-18-24-D+

Mini-Circuits


50Ω 6 to 18 GHz

TYPICAL PERFORMANCE CURVES


INSERTION LOSS vs. TEMPERATURE
INPUT POWER = 0 dBm

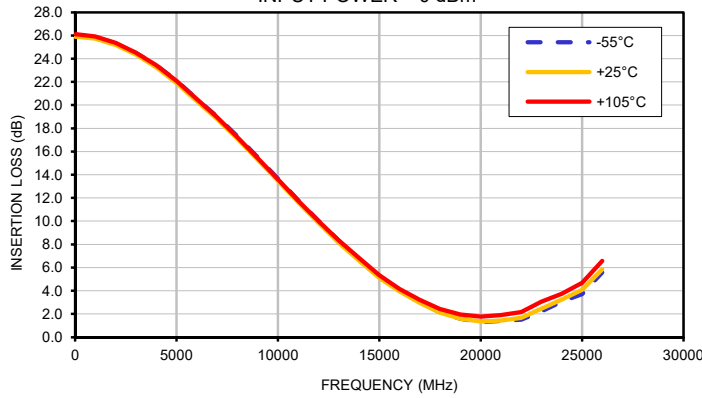

INPUT VSWR vs. TEMPERATURE
INPUT POWER = 0 dBm

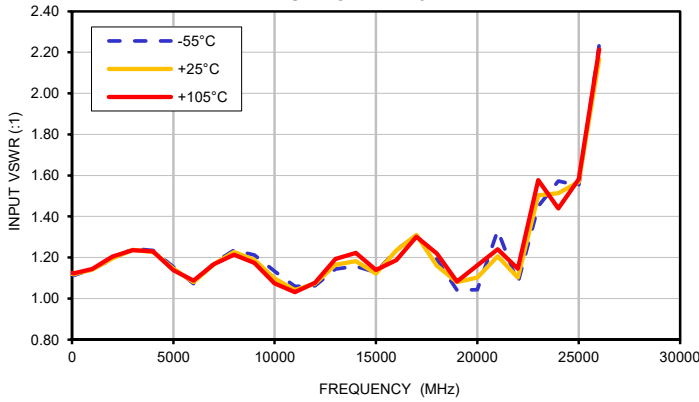

OUTPUT VSWR vs. TEMPERATURE
INPUT POWER = 0 dBm

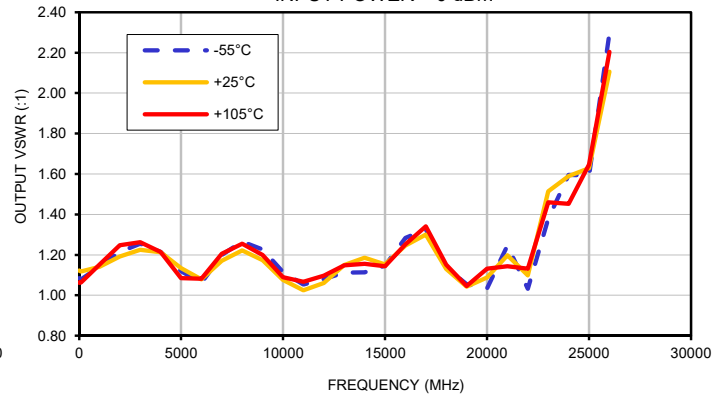



MMIC DIE

Gain Equalizer

EQY-18-24-D+

Mini-Circuits

50Ω 6 to 18 GHz

ADDITIONAL DETAILED TECHNICAL INFORMATION IS AVAILABLE ON OUR DASH BOARD.


Performance Data	Data Table
	Swept Graphs
	S-Parameter (S2P Files) Data Set with and without port extension(.zip file)
Case Style	Die
Die Ordering and packaging information	Quantity, Package Small, Gel - Pak: 5,10,50,100 KGD* Medium†, Partial wafer: KGD*<1247 Full wafer †Available upon request contact sales representative Refer to AN-60-067
Die Marking	JU18E
Environmental Ratings	ENV80

Known Good Die ('KGD') means that the die in question have been subjected to Mini-Circuits DC test performance criteria and measurement instructions and that the parametric data of such die fall within a predefined range. While DC testing is not definitive, it does provide a higher degree of confidence that die are capable of meeting typical RF electrical performance specified by Mini-Circuits.

ESD RATING**

Human Body Model (HBM): Class 1C (1000V to < 2000V) in accordance with ANSI/ESD STM 5.1 - 2001 Machine Charged Device Model (CDM): Class 1B (500V to < 1000V) in accordance with ANSI/ESD 5.2-2001

MSL TEST FLOW CHART

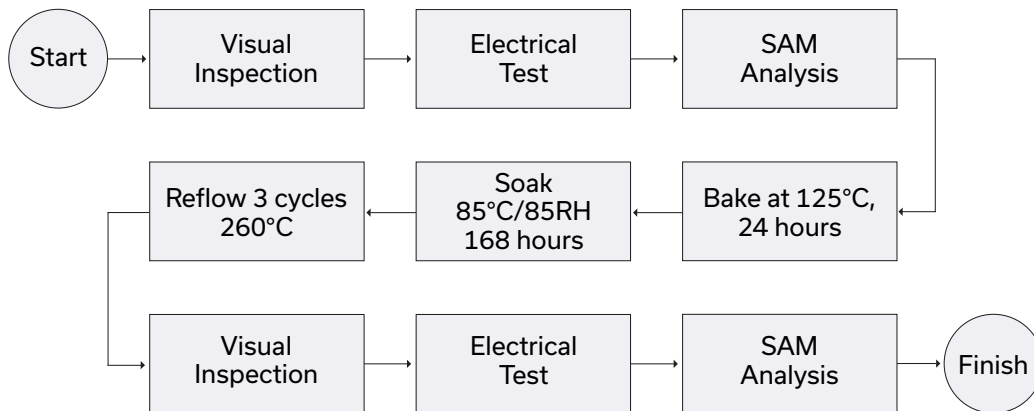

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained there in. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp
- D. Mini-Circuits does not warrant the accuracy or completeness of the information, text, graphics and other items contained within this document and same are provided as an accommodation and on an as is basis, with all faults.
- E. Purchasers of this part are solely responsible for proper storing, handling, assembly and processing of Known Good Die (including, without limitation, proper ESD preventative measures, die preparation, die attach, wire bonding and related assembly and test activities), and Mini-Circuits assumes no responsibility therefor or for environmental effects on Known Good Die.
- F. Mini-Circuits and the Mini-Circuits logo are registered trademarks of Scientific Components Corporation d/b/a Mini-Circuits. All other third-party trademarks are the property of their respective owners. A reference to any third-party trademark does not constitute or imply any endorsement, affiliation, sponsorship, or recommendation by any such third-party of Mini-Circuits or its products.



MMIC Gain Equalizer

EQY-18-24-D+

Typical Performance Data

FREQ.	INSERTION LOSS			INPUT VSWR			OUTPUT VSWR		
(MHz)	(dB)			(:1)			(:1)		
	@-55°C	@25°C	@+105°C	@-55°C	@25°C	@+105°C	@-55°C	@25°C	@+105°C
10	26.04	25.89	26.08	1.12	1.12	1.13	1.08	1.12	1.06
20	26.03	25.89	26.11	1.12	1.12	1.13	1.08	1.12	1.06
30	26.03	25.89	26.10	1.12	1.12	1.12	1.08	1.12	1.06
40	26.04	25.90	26.10	1.12	1.12	1.12	1.08	1.12	1.06
50	26.04	25.89	26.10	1.12	1.12	1.12	1.08	1.12	1.06
60	26.03	25.90	26.10	1.11	1.12	1.12	1.08	1.12	1.06
70	26.04	25.89	26.10	1.11	1.12	1.12	1.08	1.12	1.06
80	26.04	25.89	26.11	1.11	1.12	1.12	1.08	1.12	1.06
90	26.04	25.90	26.11	1.11	1.12	1.12	1.08	1.12	1.06
100	26.04	25.89	26.10	1.11	1.12	1.12	1.08	1.12	1.06
1000	25.86	25.72	25.92	1.14	1.14	1.14	1.14	1.14	1.15
2000	25.31	25.18	25.36	1.19	1.20	1.21	1.21	1.19	1.25
3000	24.51	24.36	24.52	1.24	1.24	1.24	1.25	1.23	1.26
4000	23.44	23.27	23.45	1.23	1.23	1.23	1.21	1.21	1.21
5000	22.10	21.90	22.08	1.15	1.15	1.14	1.12	1.13	1.08
6000	20.54	20.35	20.53	1.07	1.08	1.09	1.06	1.08	1.08
7000	19.01	18.81	18.96	1.17	1.17	1.17	1.20	1.17	1.20
8000	17.33	17.13	17.26	1.24	1.23	1.21	1.27	1.22	1.25
9000	15.51	15.31	15.44	1.21	1.19	1.17	1.23	1.17	1.20
10000	13.67	13.47	13.61	1.13	1.10	1.07	1.12	1.08	1.09
11000	11.81	11.62	11.78	1.06	1.04	1.03	1.05	1.02	1.07
12000	10.02	9.85	10.01	1.06	1.07	1.08	1.08	1.06	1.10
13000	8.32	8.16	8.35	1.14	1.16	1.19	1.11	1.15	1.15
14000	6.73	6.59	6.83	1.16	1.18	1.22	1.11	1.19	1.16
15000	5.25	5.11	5.34	1.13	1.12	1.14	1.15	1.15	1.14
16000	4.03	3.94	4.15	1.24	1.24	1.19	1.28	1.25	1.25
17000	3.00	2.96	3.22	1.31	1.31	1.30	1.33	1.30	1.34
18000	2.13	2.10	2.43	1.19	1.16	1.22	1.14	1.13	1.15
19000	1.58	1.58	1.94	1.04	1.08	1.08	1.06	1.04	1.05
20000	1.30	1.36	1.77	1.04	1.10	1.16	1.03	1.09	1.13
21000	1.40	1.43	1.89	1.33	1.21	1.24	1.25	1.20	1.14
22000	1.51	1.66	2.17	1.08	1.10	1.15	1.03	1.10	1.13
23000	2.22	2.44	3.06	1.45	1.50	1.58	1.38	1.51	1.46
24000	3.05	3.24	3.74	1.57	1.51	1.44	1.60	1.59	1.45
25000	3.72	4.08	4.67	1.55	1.57	1.58	1.59	1.63	1.65
26000	5.58	5.83	6.57	2.24	2.17	2.21	2.30	2.11	2.20






P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

Typical Performance Curves

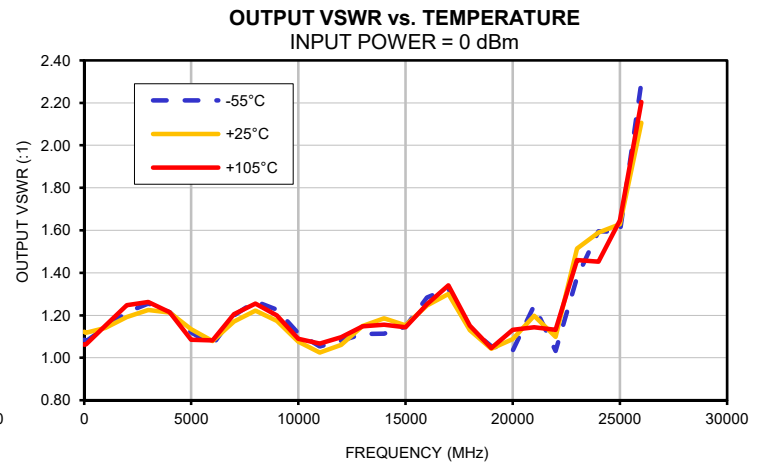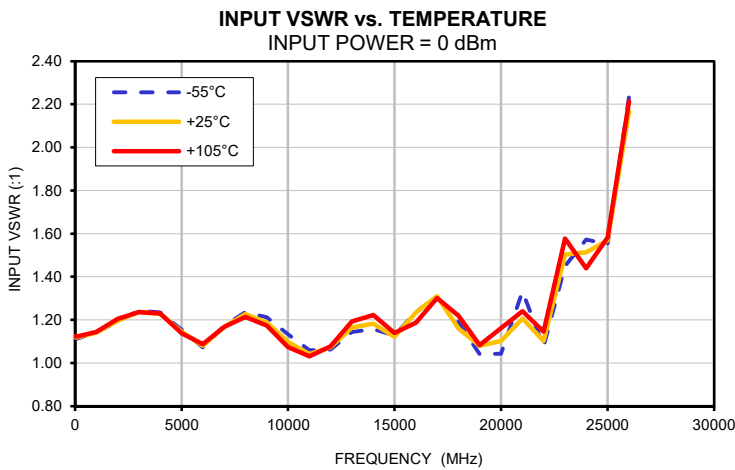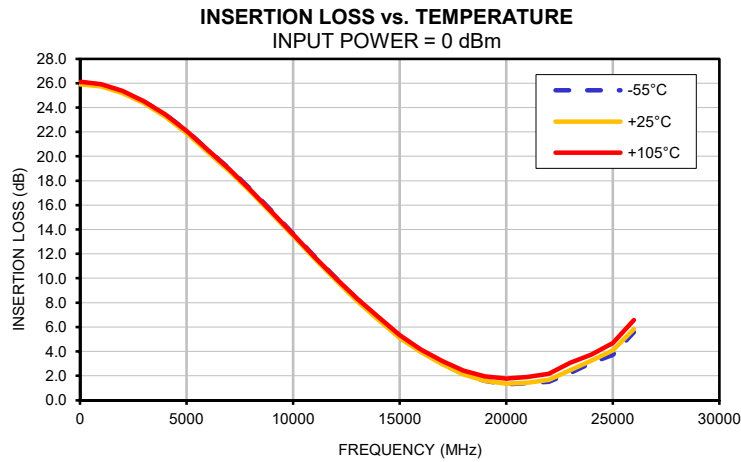

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85° C or -40° to 105° C or -55° to 105° C or -45° to 105° C Ambient Environment	Refer to Individual Model Data Sheet
Storage Environment (Die)	-65° to 150°C	Individual Model Data Sheet
Storage Environment(Packaging)	-40° to 70°C and 40 to 60% humidity (In Factory Shipped Package)	