NON-CATALOG

Surface Mount

Voltage Controlled Oscillator

JTOS-75+

Linear Tuning 37.5 to 75 MHz

CASE STYLE: BK377

Features
- wide frequency range, 37.5 to 75 MHz
- linear tuning characteristics
- excellent harmonic suppression, -32 dBc typ.
- low phase noise, -152 dBc/Hz at 1 MHz offset
- aqueous washable

Applications
- instrumentation
- VHF communication systems
- frequency synthesizers

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

MODEL NO.	FREQ. (MHz)		POWER OUTPUT (dBm)	PHASE NOISE dBc/Hz SSB at offset frequencies,kHz				TUNING					NON HARMONIC SPURIOUS (dBc)	HARMONICS (dBc)		PULLING pk-pk @12 dBr (MHz)	PUSHING (MHz/V)	DC OPERATING POWER	
						Typ.		VOLTAGE RANGE (V)		SENSI-TIVITY (MHz/V)	PORT CAP (pF)	3 dB MODULATION BANDWIDTH (MHz)						Vcc (volts)	Current (mA)
	Min.	Max.	Typ.	1	10	100	1000	Min.	Max.	Typ.	Typ.	Typ.	Typ.	Typ.	Max.	Typ.	Typ.		Max.
JTOS-75(+)	37.5	75	+7.5	-90	-111	-131	-152	1	16	2.7 - 3.2	345	0.1	-90	-32	-20	0.05	0.11	12	20

Pin Connections

RF OUT	13
VCC	2
V-TUNE	5
GROUND	1,3,4,6,7,8,9,10,11,12,14

Maximum Ratings

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	16V
Absolute Max. Tuning Voltage (Vtune)	18V
All specifications	50 ohm system

Permanent damage may occur if any of these limits are exceeded.

Tape & Reel: F107
7" Reels with 10, 20, 50, 100 devices
13" Reels with 200 devices

Environmental Ratings: ENV65

Outline Drawing

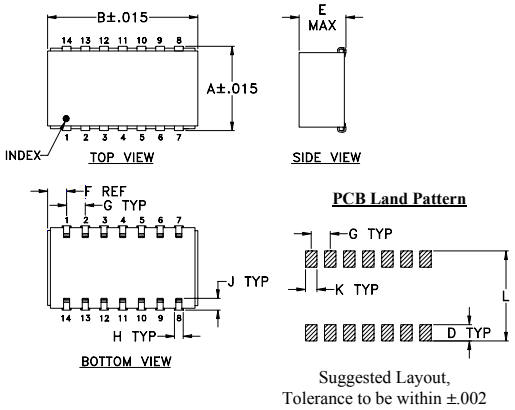

Suggested Layout,
Tolerance to be within ±.002

Demo Board MCL P/N: TB-04
Suggested PCB Layout (PL-005)

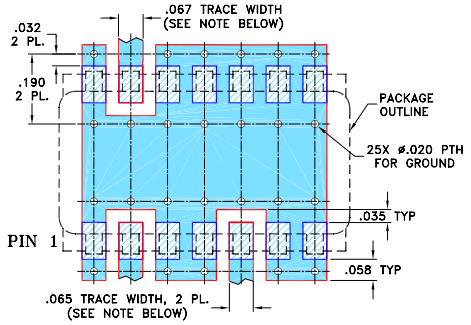

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Outline Dimensions (inch / mm)

A	B	C	D	E	F	G	H	J	K	L	wt
.505	.800	--	.100	.250	.100	.100	.047	.065	.065	.525	grams
12.83	20.32	--	2.54	6.35	2.54	2.54	1.19	1.65	1.65	13.34	3.0

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Performance Data & Curves*

JTOS-75+

V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			Icc (mA)	HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ. PULL (MHz)	PHASE NOISE (dBc/Hz) at offsets				FREQ OFFSET (kHz)	PHASE NOISE at 56 MHz (dBc/Hz)
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C		F2	F3	F4			1kHz	10kHz	100kHz	1MHz		
0.00	4.61	32.1	31.0	30.1	6.21	5.67	5.10	14.94	-32.8	-33.9	-42.5	0.05	0.01	-86.00	-105.8	-126.7	-150.6	1.0	-91.90
1.00	3.47	35.8	35.4	35.0	7.72	7.71	7.52	14.58	-36.5	-37.4	-43.6	0.13	0.00	-90.16	-111.1	-131.9	-154.2	2.0	-97.28
1.50	3.35	37.4	37.1	36.8	8.11	8.21	8.15	14.39	-36.4	-38.0	-43.3	0.09	0.00	-92.20	-114.5	-135.0	-156.6	3.5	-103.11
2.00	3.23	39.1	38.8	38.4	8.13	8.22	8.15	14.36	-43.0	-37.7	-42.9	0.18	0.01	-92.74	-114.9	-134.9	-156.4	6.0	-106.83
3.00	2.82	42.2	41.9	41.6	8.12	8.20	8.11	14.40	-55.1	-36.7	-42.1	0.10	0.00	-92.75	-115.4	-135.5	-156.8	8.5	-110.00
4.00	2.75	45.0	44.7	44.4	8.06	8.13	8.02	14.41	-44.3	-35.5	-41.5	0.07	0.01	-95.25	-115.0	-135.2	-156.4	10.0	-112.26
5.00	2.80	47.8	47.5	47.1	7.96	8.02	7.91	14.42	-39.6	-34.5	-41.0	0.06	0.02	-93.64	-114.3	-134.9	-155.9	20.8	-117.88
6.00	2.89	50.6	50.3	50.0	7.83	7.87	7.77	14.41	-36.7	-33.6	-40.7	0.07	0.02	-93.87	-113.4	-133.9	-154.9	35.6	-122.79
7.00	2.99	53.6	53.2	52.9	7.68	7.71	7.61	14.40	-34.6	-32.5	-40.6	0.09	0.03	-90.92	-112.6	-133.0	-154.0	60.8	-127.73
8.00	3.04	56.6	56.2	55.9	7.51	7.53	7.42	14.39	-33.2	-31.6	-40.5	0.12	0.04	-91.06	-112.5	-132.1	-153.0	86.9	-130.90
8.50	3.05	58.1	57.7	57.4	7.42	7.43	7.32	14.39	-32.8	-31.2	-40.5	0.13	0.05	-91.49	-112.1	-132.6	-153.5	100.0	-132.08
9.00	3.05	59.6	59.2	58.9	7.33	7.32	7.22	14.39	-32.5	-30.7	-40.5	0.13	0.05	-89.29	-110.3	-131.1	-151.9	145.8	-135.68
10.00	3.02	62.7	62.3	62.0	7.12	7.11	7.00	14.38	-32.1	-30.0	-40.5	0.15	0.06	-88.27	-109.6	-130.3	-150.9	171.2	-137.16
11.00	2.98	65.7	65.3	65.0	6.90	6.89	6.77	14.39	-31.8	-29.4	-40.5	0.15	0.05	-88.34	-108.5	-129.4	-150.0	204.6	-138.92
12.00	2.96	68.7	68.3	68.0	6.67	6.67	6.54	14.38	-31.7	-28.9	-40.5	0.15	0.02	-86.73	-108.0	-128.5	-149.0	287.3	-141.95
13.00	2.99	71.7	71.2	71.0	6.44	6.45	6.31	14.38	-31.7	-28.5	-40.6	0.14	0.10	-87.26	-107.0	-127.7	-148.1	337.4	-143.42
13.50	3.02	73.3	72.7	72.5	6.32	6.34	6.20	14.39	-31.5	-28.4	-40.8	0.14	0.14	-86.52	-106.5	-127.3	-147.7	473.6	-146.42
14.00	3.06	74.8	74.2	74.0	6.20	6.23	6.09	14.39	-31.5	-28.2	-40.6	0.15	0.18	-85.82	-106.3	-126.8	-147.2	566.2	-147.98
15.00	3.16	78.0	77.3	77.1	5.96	6.00	5.86	14.39	-31.3	-28.0	-41.1	0.16	0.23	-85.10	-105.3	-125.8	-146.4	933.4	-152.32
16.00	3.26	81.2	80.5	80.2	5.71	5.77	5.64	14.40	-31.0	-27.9	-41.3	0.20	0.26	-83.01	-104.3	-124.7	-145.3	1000.0	-153.01

*at 25°C unless mentioned otherwise

JTOS-75
Frequency and Tuning Sensitivity

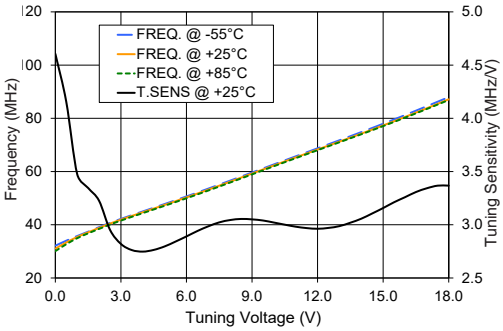

JTOS-75
Power Output

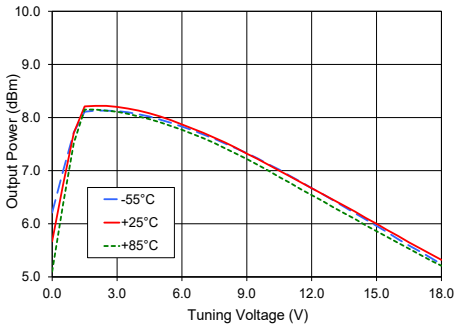

JTOS-75
Harmonics Level

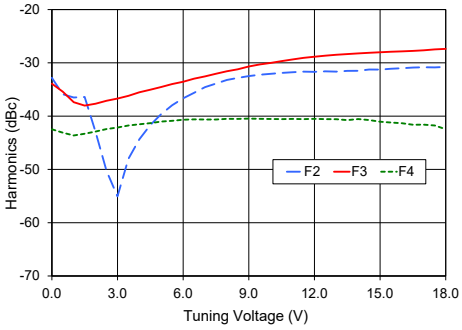

JTOS-75
Frequency Pulling & Pushing (Vcc ± 5%)

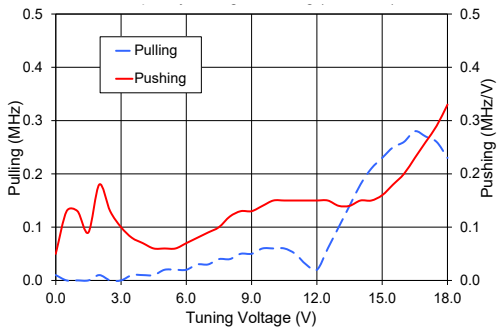

JTOS-75
Phase Noise Vs. Tuning Voltage

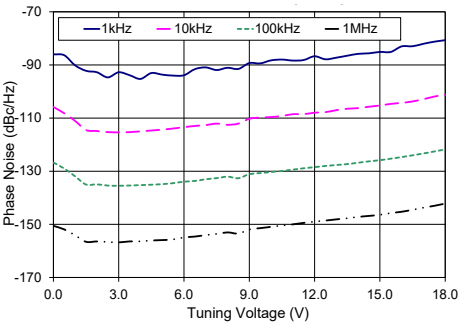

JTOS-75
Phase Noise

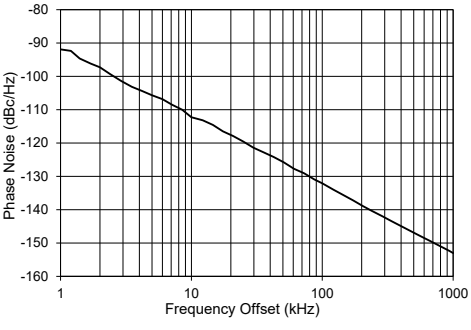

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Voltage Controlled Oscillator JTOS-75+

Typical Performance Data

V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			HARMONICS (dBc)			FREQ. PUSH (MHz/V)
		-55ºC	+25ºC	+85ºC	-55ºC	+25ºC	+85ºC	F2	F3	F4	
1.0	4.90	34.5	33.9	33.2	8.95	9.10	9.08	-26.6	-32.6	-43.4	0.13
2.0	3.50	37.9	37.4	36.8	9.83	9.93	9.93	-27.2	-34.4	-40.9	0.14
3.0	3.00	40.8	40.3	39.9	9.88	9.95	9.90	-26.7	-35.1	-39.6	0.06
4.0	2.60	43.4	43.0	42.5	9.88	9.92	9.83	-26.7	-35.2	-38.9	0.04
5.0	2.50	45.9	45.5	45.1	9.58	9.60	9.49	-27.0	-34.6	-38.6	0.02
6.0	2.60	48.5	48.1	47.7	9.51	9.53	9.39	-27.4	-34.1	-38.4	0.02
7.0	2.70	51.2	50.7	50.3	9.42	9.42	9.29	-28.0	-33.5	-38.3	0.03
8.0	2.80	54.0	53.5	53.1	9.31	9.30	9.16	-28.3	-32.7	-38.2	0.04
9.0	2.90	56.9	56.4	56.0	9.01	8.97	8.83	-29.0	-32.2	-38.0	0.06
10.0	3.00	59.8	59.3	58.9	8.86	8.80	8.64	-29.7	-31.5	-38.2	0.07
11.0	3.10	62.9	62.4	62.0	8.69	8.58	8.44	-30.4	-31.1	-38.3	0.09
12.0	3.10	66.0	65.5	65.1	8.32	8.22	8.06	-31.6	-30.6	-38.2	0.09
13.0	3.20	69.3	68.6	68.3	8.08	7.98	7.81	-32.8	-30.3	-38.3	0.10
14.0	3.30	72.6	71.9	71.5	7.82	7.73	7.57	-34.6	-29.9	-38.4	0.12
15.0	3.40	76.1	75.4	74.9	7.39	7.31	7.29	-36.5	-29.8	-38.5	0.16
16.0	3.60	79.7	78.9	78.5	7.11	7.02	6.87	-39.5	-29.5	-38.9	0.22

FREQ OFFSET (KHz)	PHASE NOISE (dBc/Hz)
1	-89
10	-110
100	-130
1000	-140

Voltage Controlled Oscillator JTOS-75+

Typical Performance Data

Frequency and Tuning Sensitivity

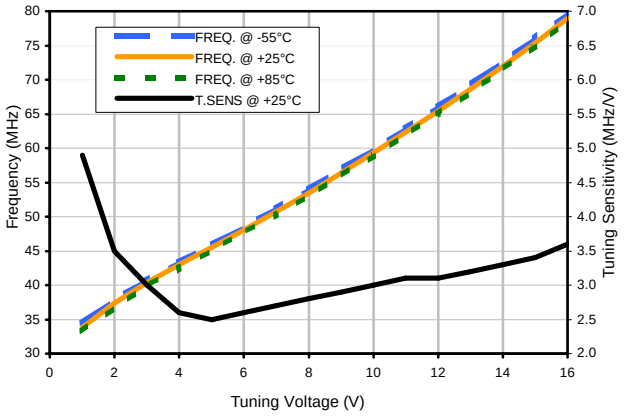

Power Output

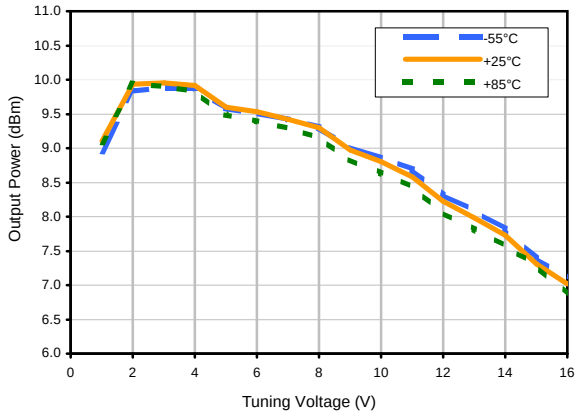

Harmonics Level

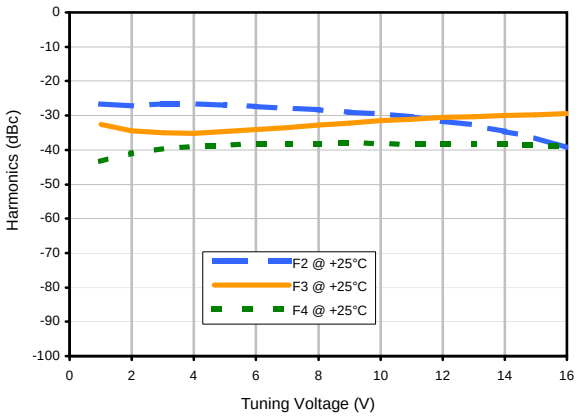

Frequency Pushing

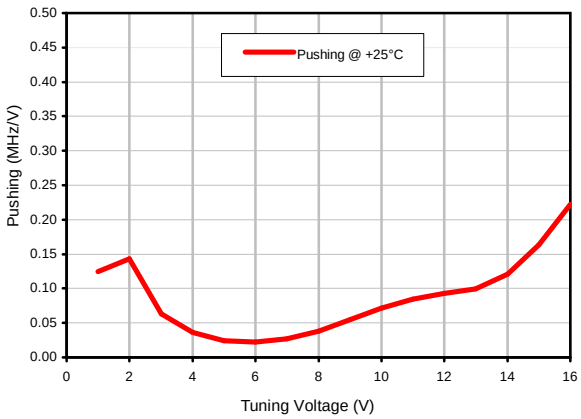

Phase Noise

REV. X1
JTOS-75+
070131
Page 1 of 1

Case Style BK

BK377

Outline Dimensions

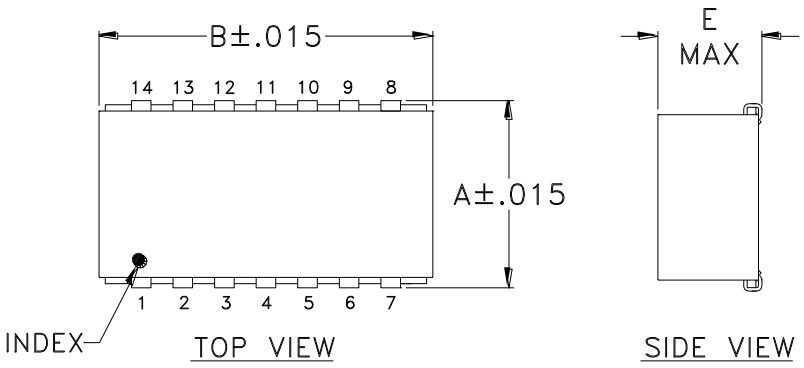

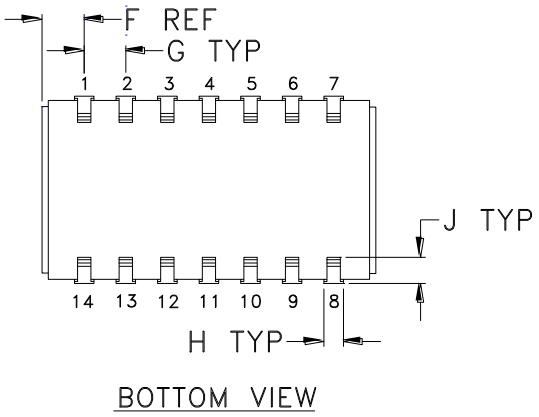

PCB Land Pattern

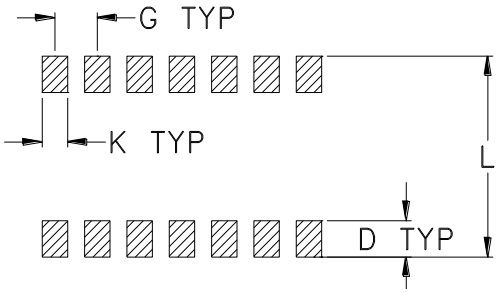

Suggested Layout,
Tolerance to be within ±.002

CASE #	A	B	C	D	E	F	G	H	J	K	L	WT. GRAM
BK377	.505 (12.83)	.800 (20.32)	-- --	.100 (2.54)	.250 (6.35)	.100 (2.54)	.100 (2.54)	.047 (1.19)	.065 (1.65)	.065 (1.65)	.525 (13.34)	2.0 MAX.

Dimensions are in inches (mm). Tolerances: 2Pl. ± .01; 3Pl. ± .005

Notes:

1. Case material: Copper Nickel alloy.
2. Base material: Printed wiring laminate.
3. Termination finish:
   For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
   For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.

Mini-Circuits®
INTERNET http://www.minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

Tape & Reel Packaging TR-F107

DEVICE ORIENTATION IN T&R

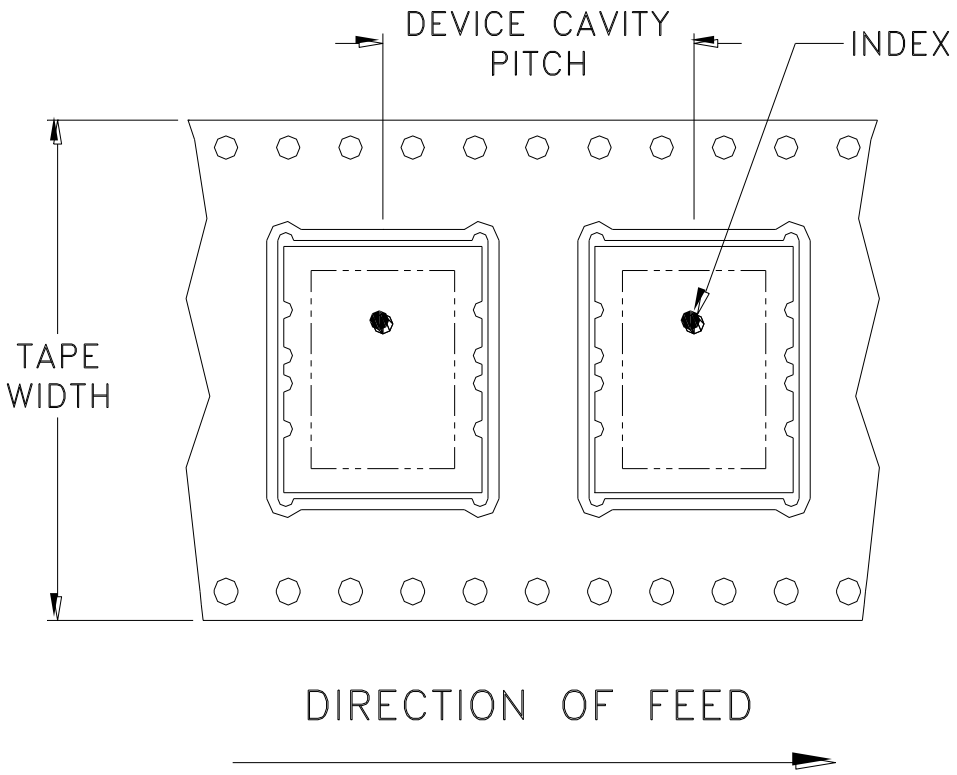

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
32	20	7	Small quantity standards (see note)	10
				20
				50
				100
		13	Standard	200

Note: Please consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf

Mini-Circuits®
INTERNET http://www.minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

THIRD ANGLE PROJECTION

REVISIONS					
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
B	M76077	UPDATED DRAWING	04/01	GF	MM
C	M82575	UPDATED DRAWING	08/08/02	IL	MM
D	M102713	UPDATED DIMENSIONS & NOTES	01/17/06	MMG	IL
E	M115059	CORRECTED NOTE 2	12/18/07	MMG	IL

SUGGESTED MOUNTING CONFIGURATION FOR BK377 CASE STYLE, "jc" PIN CONNECTION

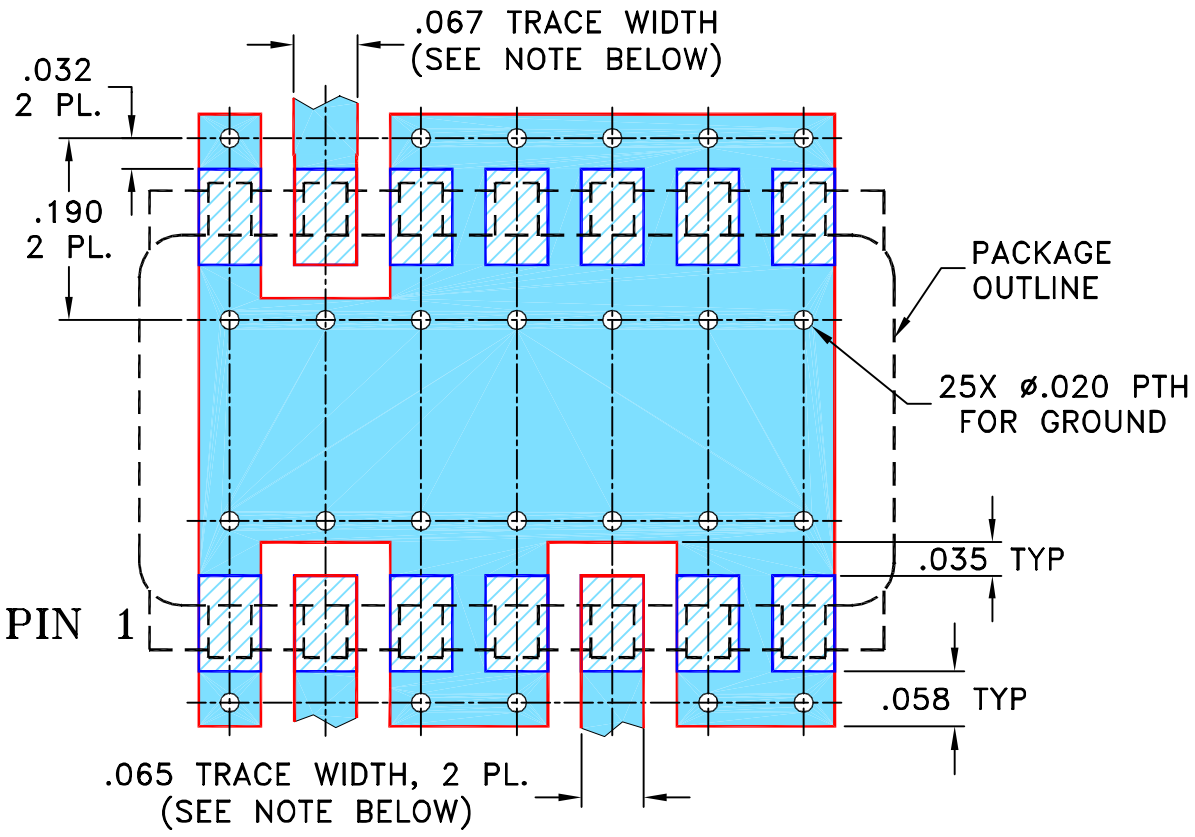

NOTES:
1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE
DIMENSIONS ARE IN INCHES	DRAWN	FB	05/20/00
TOLERANCES ON:	CHECKED	MM	05/24/00
2 PL DECIMALS ±	APPROVED	DB	05/24/00
3 PL DECIMALS ± .005			
ANGLES ±			
FRACTIONS ±			

ASHEETA1.DWG REV:A DATE:01/12/95

Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235

PL, jc, BK377, JTOS, TB-04

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-005	E

FILE:	SCALE:	SHEET:
98PL005	5:1	1 OF 1

Evaluation Board and Circuit

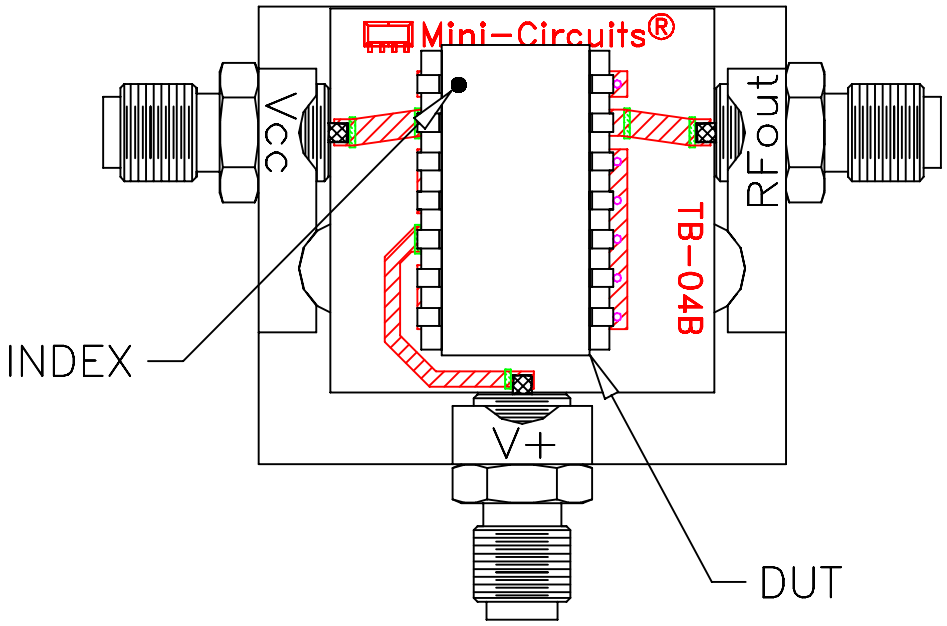

TB-04

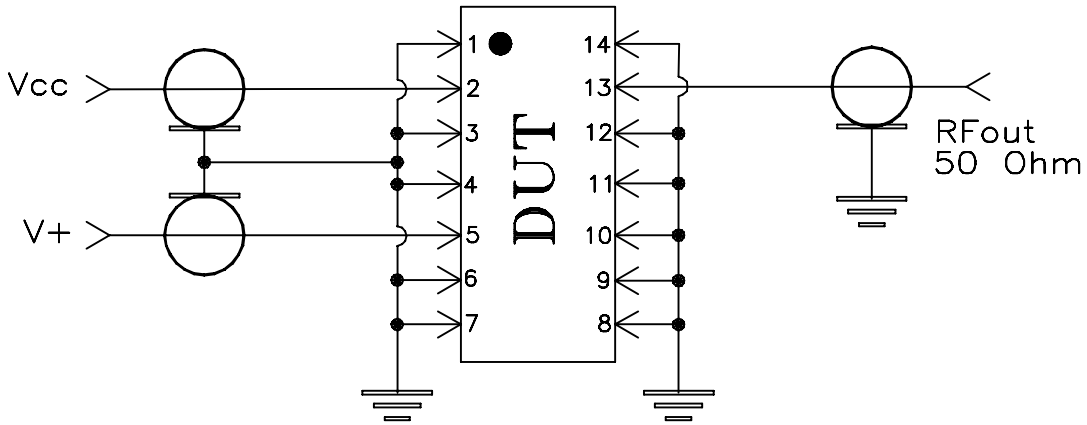

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers RO4350 or equivalent, Dielectric Constant=3.5, Thickness=.030 inch.

Mini-Circuits®

Mini-Circuits

Environmental Specifications ENV65

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutectic Process: 225°C peak Pb-Free Process, 245°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Vibration (High Frequency)	20g peak, 20-2000 Hz, 4 times in each of three axes (total 12)	MIL-STD-883, Method 2007.3, Condition A
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215