


## DESIGNER'S KIT KHFC3-086+

## Coaxial Cables



DC to 18 GHz, SMA-Male Connectors

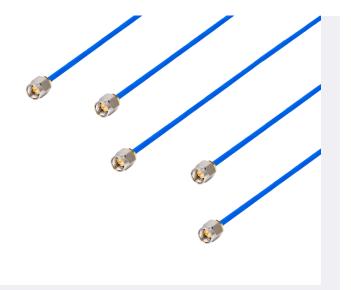

## **FEATURES**

- Hand Formable
- Choice of cable lengths
- Robust
- Tight Bend Radius, 6mm Radius Min.
- Excellent Return Loss
- Excellent Insertion Loss
- Very Low Cost





## **KHFC3-086+ ELECTRICAL SPECIFICATIONS**

(kit includes 5 of each model, total 25 pieces)


Model No.¹	Freq. (GHz) f <sub>L</sub> -f <sub>U</sub>	Length <sup>2</sup> (Inches)	Insertion loss (dB)				Return Loss (dB)			
			DC - 2 GHz Typ.	2 - 6 GHz Typ.	6 - 10 GHz Typ.	10 - 18 GHz Typ.	DC - 2 GHz Typ.	2 - 6 GHz Typ.	6 - 10 GHz Typ.	10 - 18 GHz Typ.
086-3SM+	DC-18	3	0.04	0.14	0.2	0.31	49	37	33	27
086-6SM+	DC-18	6	0.08	0.26	0.34	0.52	49	40	34	27
086-12SM+	DC-18	12	0.14	0.46	0.69	1.01	45	41	36	30
086-18SM+	DC-18	18	0.20	0.65	0.97	1.41	44	39	34	27
086-24SM+	DC-18	24	0.28	0.92	1.41	2.02	44	42	33	27

<sup>1.</sup> Unjacketed cable also available upon request.

Custom sizes available upon request.



ENV52



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 105° C or -55° to 85° C (see datasheet) Ambient Environment	Individual Model Data sheet
Storage Temperature	-55° to 105° C or -55° to 85° C (see data sheet) Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 100 Cycles	MIL-STD-202F; Method 107G
Multiple Bend Radius	40 mm, 5 times for 141 series cables 30 mm, 5 times for 086 series cables	
Single Bend Radius	8 mm for 141 series cables 6 mm for 086 series cables	

ENV52 Rev: C 07/06/18 M168814 File: ENV52.pdf

This document and its contents are the property of Mini-Circuits.