CERAMIC

Low Pass Filter

LFCN-8400+

50Ω DC[1] to 8400 MHz

FEATURES

- Excellent power handling, 8W
- Small size
- 7 sections
- Temperature stable
- Hermetically sealed
- LTCC construction
- Protected by U.S. Patent 6,943,646

APPLICATIONS

- Harmonic rejection
- VHF/UHF transmitters/receivers
- Lab use



Generic photo used for illustration purposes only

CASE STYLE: FV1206-4

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

ELECTRICAL SPECIFICATIONS[1,2] AT 25°C

Parameter		F#	Frequency (MHz)	Min.	Typ.	Max.	Units
Passband	Insertion Loss	DC-F1	DC-8400	—	—	1.6	dB
	Freq. Cut-Off	F2	9100	—	3.0	—	dB
	VSWR	DC-F1	DC-8400	—	1.6	—	:1
Stop Band	Rejection Loss	F3	10300	20	—	—	dB
		F4-F5	10300-15000	—	30	—	
	VSWR	F3-F6	10300-15000	—	17	—	:1

1. In Application where DC voltage is present at either input or output ports, coupling capacitors are required.
2. Measured on Mini-Circuits Characterization Test Board TB-618+.

MAXIMUM RATINGS

Parameter	Ratings
Operating temperature	-55°C to 100°C
Storage temperature	-55°C to 100°C
RF Power Input[3]	8 W max. at 25°C

3. Passband rating, derate linearly to 3W at 100°C ambient.
Permanent damage may occur if any of these limits are exceeded.

TYPICAL FREQUENCY RESPONSE

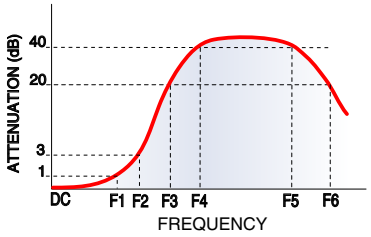

FUNCTIONAL SCHEMATIC

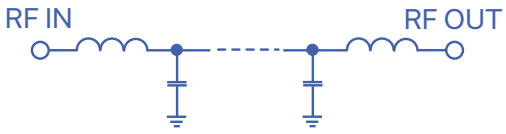

REV. D
ECO-011891
LFCN-8400+
AD/CP/AM
220209

PIN CONNECTIONS

RF IN	1
RF OUT	3
GROUND	2,4

PRODUCT MARKING: AG

DEMO BOARD MCL P/N: TB-618
SUGGESTED PCB LAYOUT (PL-363)

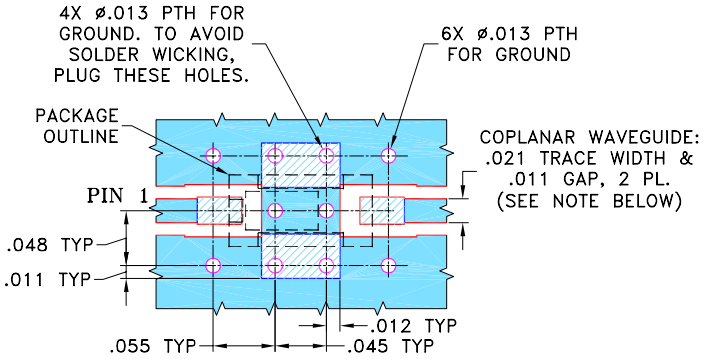

NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010" ± .001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

OUTLINE DRAWING

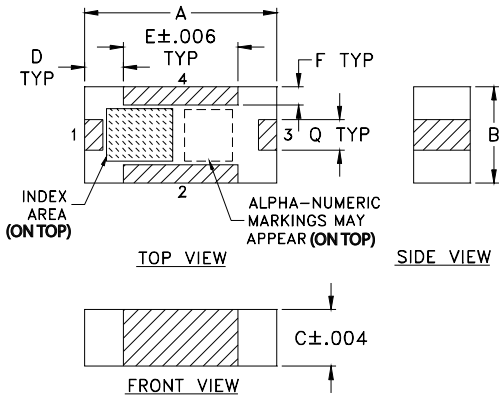

PCB Land Pattern

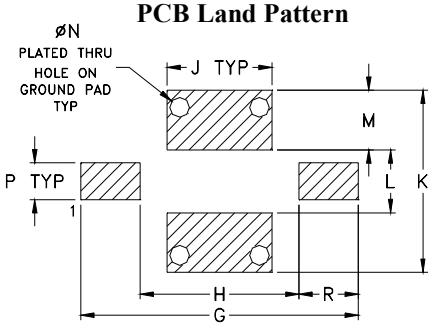

Suggested Layout,
Tolerance to be within ±.002

OUTLINE DIMENSIONS (Inches / mm)

A	B	C	D	E	F	G	H	J
.126	.063	.037	.026	.075	.012	.182	.104	.069
3.20	1.60	0.94	0.66	1.91	0.30	4.62	2.64	1.75

K	L	M	N	P	Q	R	wt
.119	.041	.039	.013	.024	.020	.039	grams
3.02	1.04	0.99	0.33	0.61	0.51	0.99	.020

TAPE & REEL INFORMATION: F75

Low Pass Filter

LFCN-8400+

TYPICAL PERFORMANCE DATA AT 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
10	0.07	1.01
50	0.03	1.01
100	0.03	1.03
500	0.11	1.17
1000	0.21	1.34
5200	0.38	1.03
7000	0.58	1.15
8000	0.89	1.34
9000	1.89	2.08
10000	18.30	33.66
11000	52.31	48.44
12000	41.95	37.44
13000	43.04	30.42
14000	46.26	28.21
15000	53.19	29.16

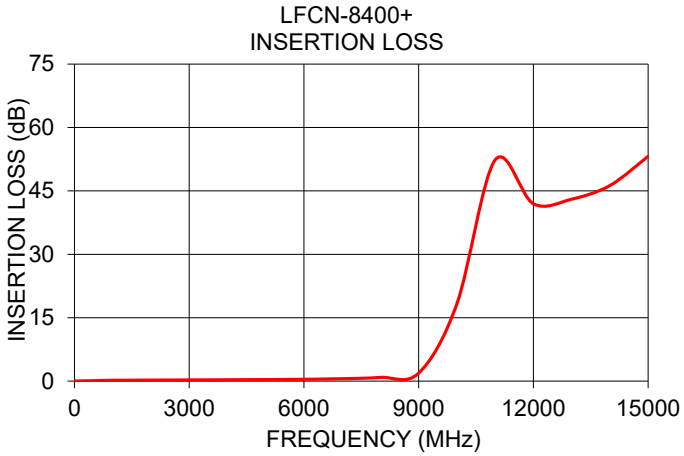

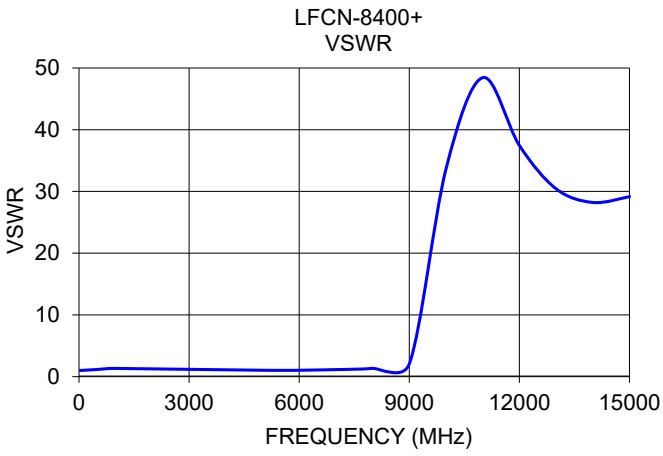

NOTES

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Low Pass Filter LFCN-8400+

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	RETURN LOSS (dB)	FREQUENCY (MHz)	GROUP DELAY (nsec)
10.0	0.14	39.48	10.0	0.10
50.0	0.17	37.83	50.0	0.09
100.0	0.18	36.59	100.0	0.09
200.0	0.19	33.35	200.0	0.09
300.0	0.21	30.81	300.0	0.09
400.0	0.22	28.75	400.0	0.09
500.0	0.23	27.05	500.0	0.09
600.0	0.25	25.45	600.0	0.09
700.0	0.26	23.99	700.0	0.09
800.0	0.27	22.70	800.0	0.09
900.0	0.29	21.51	900.0	0.09
1000.0	0.31	20.41	1000.0	0.09
2200.0	0.61	12.82	2200.0	0.09
2800.0	0.72	11.76	2800.0	0.09
3400.0	0.69	12.47	3400.0	0.10
4000.0	0.57	15.76	4000.0	0.10
4600.0	0.48	24.59	4600.0	0.11
5200.0	0.50	32.39	5200.0	0.11
5800.0	0.57	25.14	5800.0	0.12
6400.0	0.64	26.96	6400.0	0.12
7000.0	0.73	26.47	7000.0	0.13
7200.0	0.77	24.32	7200.0	0.14
7400.0	0.82	21.91	7400.0	0.16
7508.0	0.85	20.52	7508.0	0.16
7600.0	0.89	19.33	7520.0	0.16
7800.0	0.98	17.01	7600.0	0.17
7900.0	1.03	16.12	7780.0	0.17
8000.0	1.08	15.30	7800.0	0.18
8100.0	1.14	14.69	7820.0	0.18
8200.0	1.19	14.20	7840.0	0.18
8300.0	1.25	13.94	7860.0	0.18
8400.0	1.29	14.11	7880.0	0.18
8500.0	1.33	14.75	7900.0	0.18
8600.0	1.36	16.29	7920.0	0.18
8700.0	1.42	19.22	7940.0	0.18
8800.0	1.52	24.62	7960.0	0.18
8900.0	1.75	20.09	7980.0	0.19
9000.0	2.21	13.25	8000.0	0.19
9100.0	3.01	8.87	8020.0	0.19
9200.0	4.23	5.98	8040.0	0.19
9300.0	5.87	4.07	8060.0	0.19
9400.0	7.82	2.85	8080.0	0.19
9500.0	9.98	2.08	8100.0	0.19
9600.0	12.26	1.61	8120.0	0.20
9700.0	14.60	1.30	8140.0	0.20
9800.0	17.00	1.09	8160.0	0.20
9900.0	19.43	0.94	8180.0	0.20
10000.0	21.91	0.83	8200.0	0.20
10050.0	23.18	0.79	8220.0	0.20
10100.0	24.46	0.76	8240.0	0.21
10150.0	25.78	0.72	8260.0	0.21
10200.0	27.12	0.70	8280.0	0.21
10250.0	28.50	0.67	8300.0	0.21
10300.0	29.94	0.66	8320.0	0.22
10500.0	36.43	0.60	8340.0	0.22
11000.0	49.41	0.48	8360.0	0.22
12000.0	50.31	0.39	8380.0	0.22
13000.0	45.91	0.22	8400.0	0.22
14000.0	35.94	0.16	8500.0	0.26
15000.0	33.24	0.07	9000.0	0.39

Low Pass Filter LFCN-8400+

Typical Performance Curves

Insertion Loss

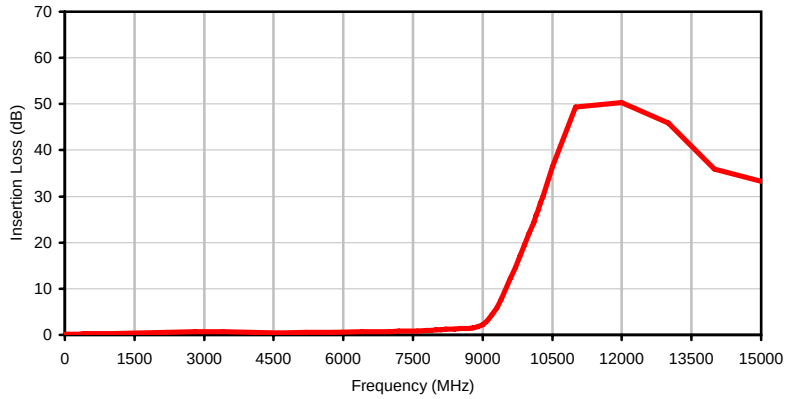

Return Loss

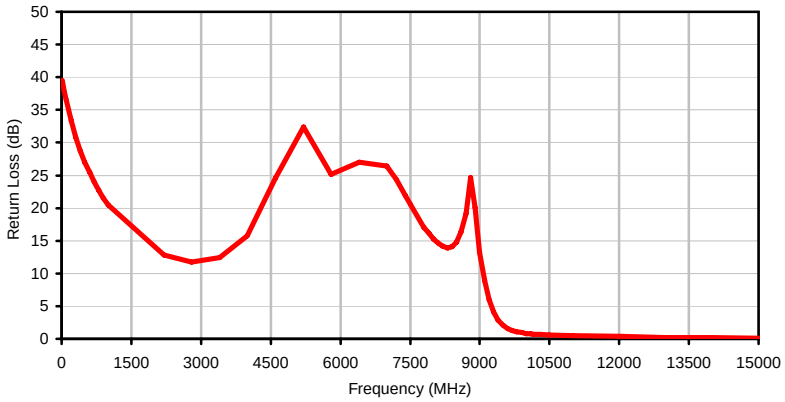

Group Delay

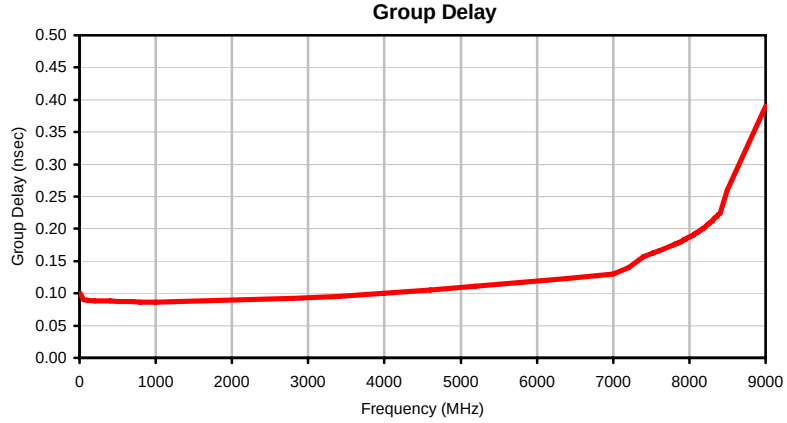

Case Style FV

FV1206-4

Outline Dimensions

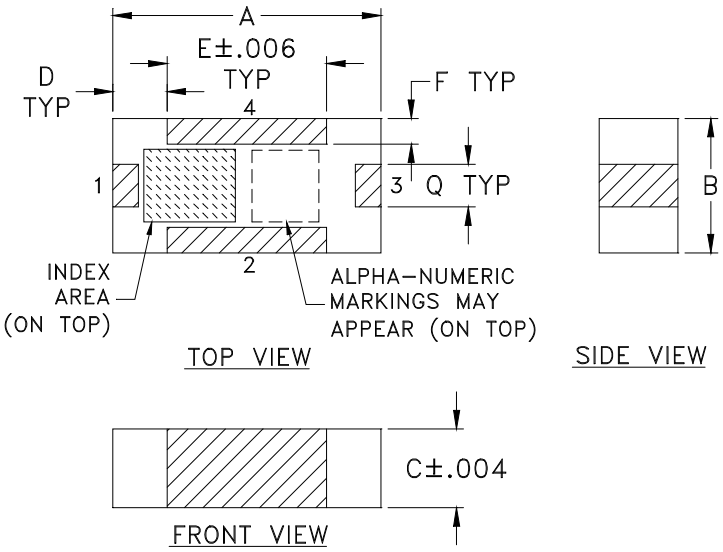

PCB Land Pattern

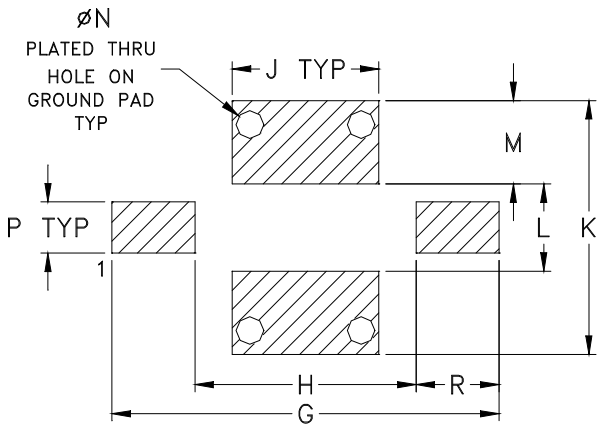

Suggested Layout,
Tolerance to be within ±.002

CASE #	A	B	C	D	E	F	G	H	J	K	L	M
FV1206-4	.126 (3.20)	.063 (1.60)	.037 (0.94)	.026 (0.66)	.075 (1.91)	.012 (0.30)	.182 (4.62)	.104 (2.64)	.069 (1.75)	.119 (3.02)	.041 (1.04)	.039 (0.99)

CASE #	N	P	Q	R	WT. GRAM
FV1206-4	.013 (0.33)	.024 (0.61)	.020 (0.51)	.039 (0.99)	.020

Dimensions are in inches (mm). Tolerances: 2 Pl. ± .01; 3 Pl. ± .005

Notes:

1. Open style, ceramic base.
2. Termination finish: **as shown below or indicated on Data Sheet.**
   For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
   For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.

This document and its contents are the property of Mini-Circuits.

Tape & Reel Packaging TR-F75

DEVICE ORIENTATION IN T&R

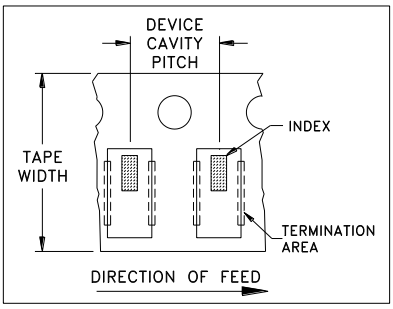

ILLUSTRATION 1

Applicable Case Styles
FV1206-1
FV1206-3

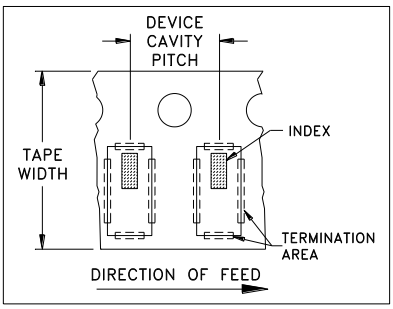

ILLUSTRATION 2

Applicable Case Styles
FV1206-4
FV1206-5
FV1206-6
FV1206-7
FV1206-9

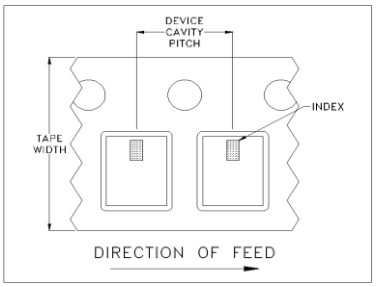

ILLUSTRATION 3

Applicable Case Styles
FV1206-12
GE0805C-18
NL1008C-6
NL1008C-7
NL1008C-9
NL1008C-10

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
8	4	7	Small quantity standards (see note)	20
				50
				100
				200
				500
				1000
			Standard	3000

Note: Please consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf

This document and its contents are the property of Mini-Circuits.

THIRD ANGLE PROJECTION

REVISIONS					
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M136022	NEW RELEASE	03/07/12	GF	ABD

SUGGESTED MOUNTING CONFIGURATION
FOR FV1206-4 CASE STYLE, "04FL01" PIN CODE

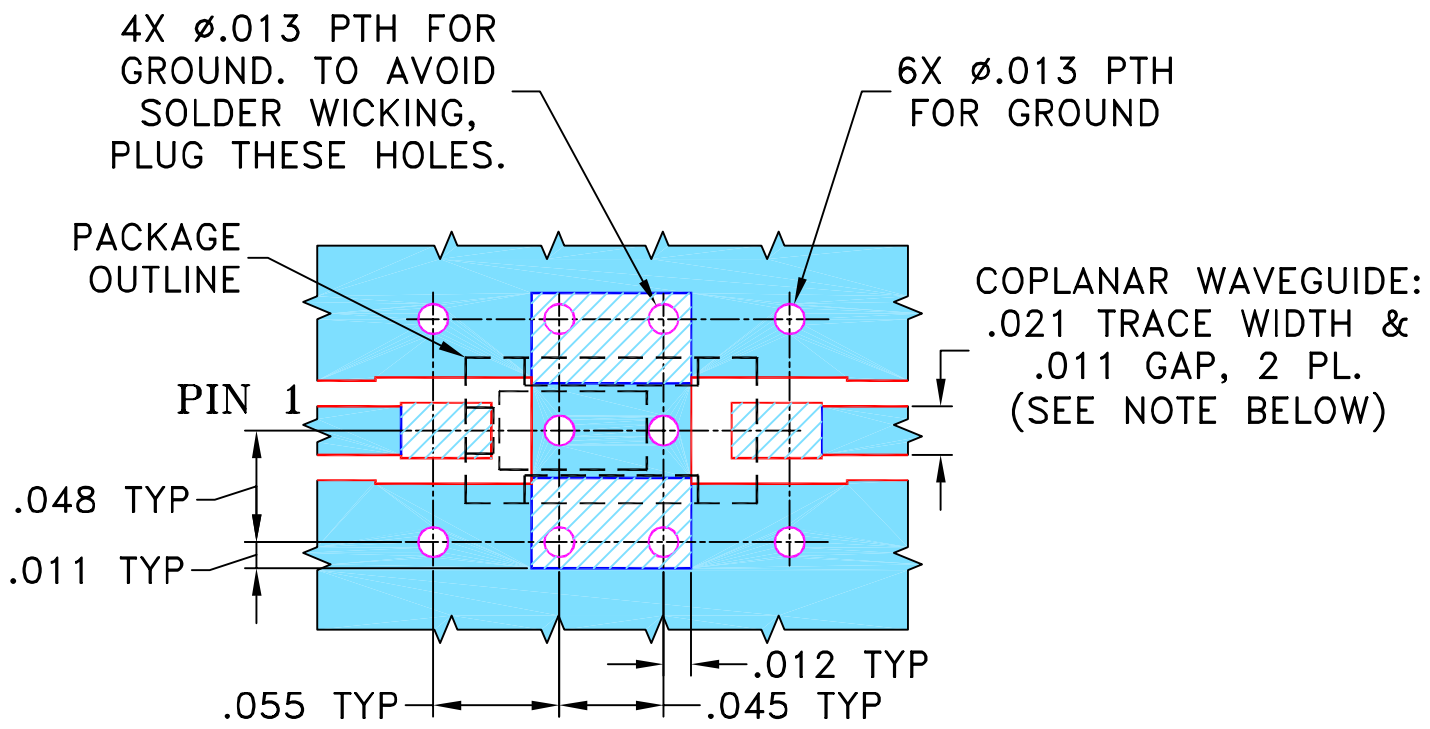

NOTE:
1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010" ± .001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE
DIMENSIONS ARE IN INCHES	DRAWN	GF	02/17/12
TOLERANCES ON:	CHECKED	IL	03/07/12
2 PL DECIMALS ±	APPROVED	ABD	03/07/12
3 PL DECIMALS ± .005			
ANGLES ±			
FRACTIONS ±			

Mini-Circuits®
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95

Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235

PL, 04FL01, FV1206-4, TB-618+

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-363	OR
FILE: 98PL363	SCALE: 12:1	SHEET: 1 OF 1	

Evaluation Board and Circuit

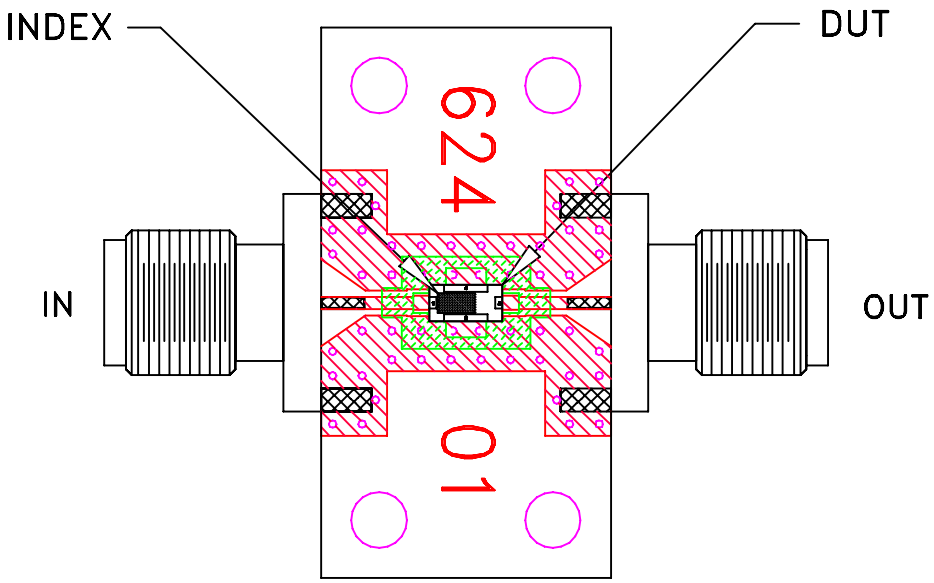

TB-618+

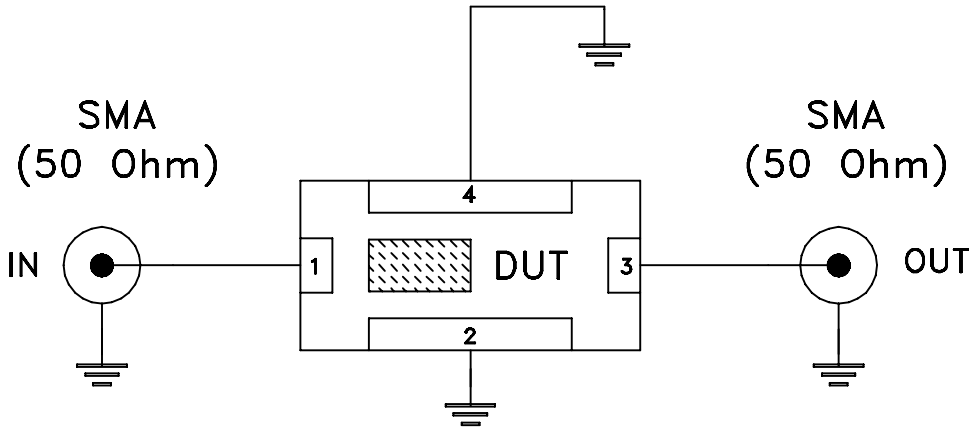

Schematic Diagram

Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: RO4350 or equivalent,
   Dielectric Constant=3.5, Thickness=.010 inch.

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS.

Mini-Circuits

Environmental Specifications ENV28

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I

This document and its contents are the property of Mini-Circuits.