

# Ceramic Active Mixer

# MACA-63H+

## Level 0 (LO Power 0 dBm) 2000 to 6000 MHz



Generic photo used for illustration purposes only

CASE STYLE: DZ1034

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	100mW
IF Current	40mA
LO Power	10mW

Permanent damage may occur if any of these limits are exceeded.


### Pin Connections

LO	10
RF	5
IF	3
DC	7
GROUND	1,2,4,6,8,9

### Outline Drawing

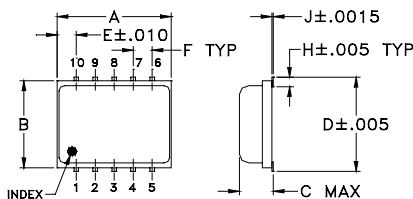


### PCB Land Pattern



### Outline Dimensions (inch / mm)

A	B	C	D	E	F	G	
.30	.250	.105	.266	.050	.050	.012	
7.62	6.35	2.67	6.76	1.27	1.27	0.30	
H	J	K	L	M		wt	
.029	.004	.085	.296	.030		grams	0.3
0.74	0.10	2.16	7.52	0.76			

Demo Board MCL P/N: TB-04  
Suggested PCB Layout (PL-283)

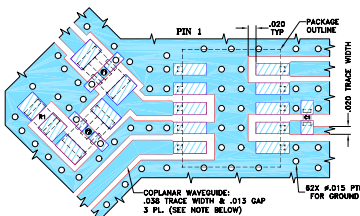

CAPACITOR C1: 1000 pF, 0402 SIZE  
RESISTOR R1: 49.9 Ohm, 0805 SIZE  
FILTER F1: LFCN-1400+, FV1206 CASE STYLE  
FILTER F2: HFCN-1810+, FV1206 CASE STYLE

NOTE: 1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

### Features

- low conversion loss, 6.9 dB typ.
- wide bandwidth, 2000 to 6000 MHz
- LTCC double balanced mixer with LO amplifier
- aqueous washable
- low profile
- low cost
- protected by US patent 7,027,795

### Applications

- PCN
- defense & weather radar
- WCDMA
- defense communications

### Electrical Specifications

FREQUENCY (MHz)	CONVERSION LOSS* (dB)	LO-RF ISOLATION (dB)	LO-IF ISOLATION (dB)	DC POWER	IP3 at center band (dBm)				
					Current (mA)	Typ.			
LO/RF $f_L$ - $f_U$	IF	$\bar{X}$	Max.	Typ. Min.	Typ. Min.	Volt	Max.	Typ.	
2000-3500	DC-1000	6.9	0.1	8.9	16	10	5	110	20
3500-6000	DC-1000	6.9	0.1	8.9**	8	3	5	110	19

1 dB Compr. +10 dBm typ.


\* Conversion loss at 30 MHz IF.

\*\* 9.6 dB over at 3500-4500 MHz

### Typical Performance Data

Frequency (MHz)	Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)	
						RF
2005.10	1975.10	6.41	22.93	35.96	2.40	5.17
2205.10	2175.10	6.50	20.61	45.55	2.42	5.83
2405.10	2375.10	5.80	21.34	33.28	2.11	3.80
2605.10	2575.10	5.89	18.60	33.35	1.87	3.21
2805.10	2775.10	6.96	17.66	35.62	3.43	3.09
3005.10	2975.10	6.65	14.13	36.97	2.95	3.10
3205.10	3175.10	7.25	12.80	36.60	3.12	3.17
3405.10	3375.10	7.25	15.03	34.47	3.15	2.97
3605.10	3575.10	7.95	14.75	33.49	3.73	2.39
3805.10	3775.10	7.78	18.55	31.52	3.26	1.82
4005.10	3975.10	7.16	18.19	32.59	2.66	1.44
4405.10	4375.10	6.15	8.68	37.37	1.40	1.48
4605.10	4575.10	6.67	8.24	37.63	1.63	1.56
4805.10	4775.10	7.06	8.76	37.81	1.58	1.62
5005.10	4975.10	6.81	6.77	36.56	1.17	1.67
5205.10	5175.10	6.40	6.01	35.48	1.61	1.60
5405.10	5375.10	6.46	6.05	34.71	1.65	1.47
5605.10	5575.10	6.95	7.12	33.12	2.21	1.36
5805.10	5775.10	7.27	7.91	33.45	2.57	1.35
6005.10	5975.10	7.48	8.62	33.08	2.82	1.43

### Electrical Schematic








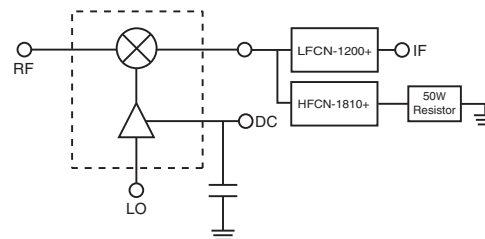


LFCN-1200+ & HFCN-1810+ are added to improve isola-



[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. C  
M168338  
ED-10457/10  
MACA-63H+  
DJ/CP/AM/QL  
220930  
Page 1 of 2

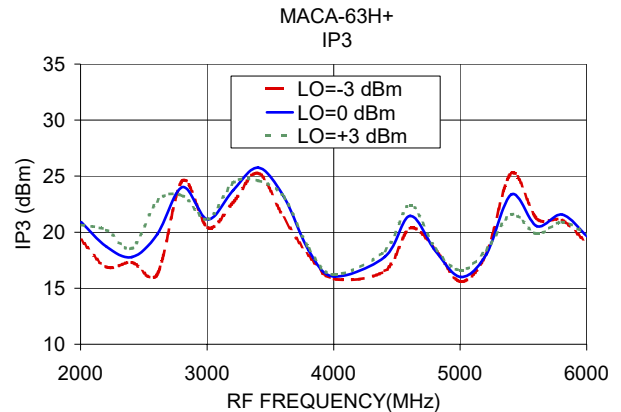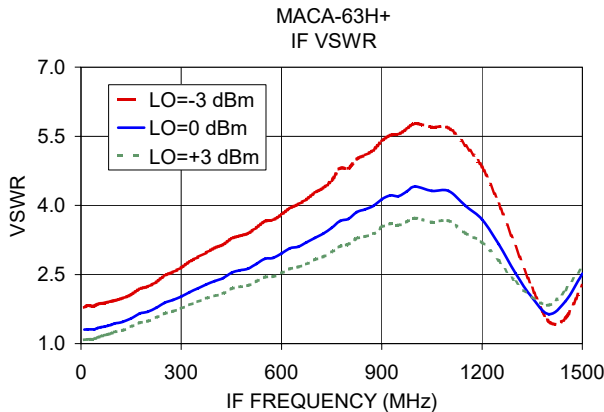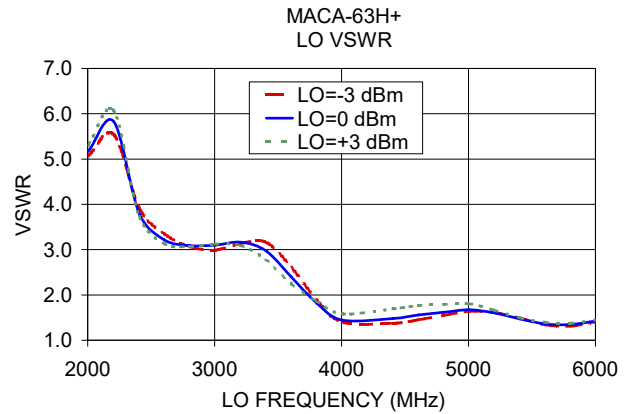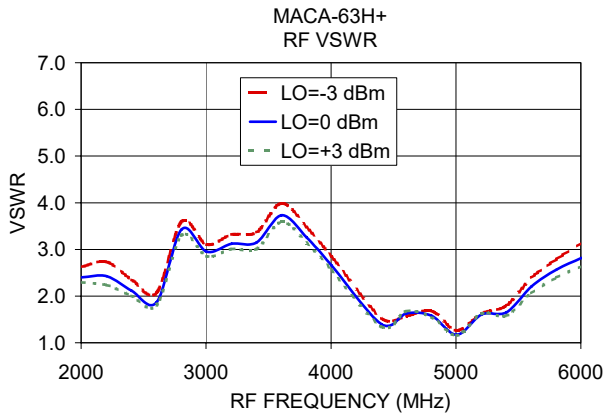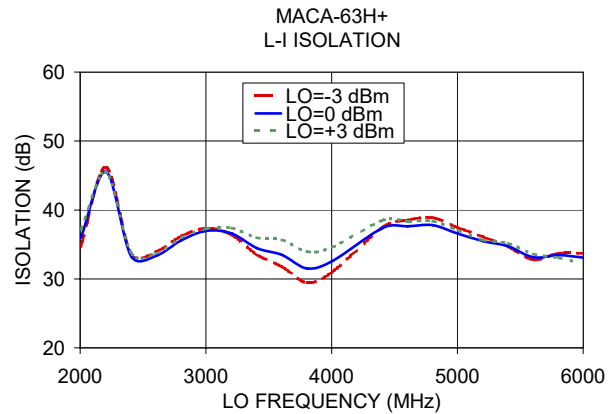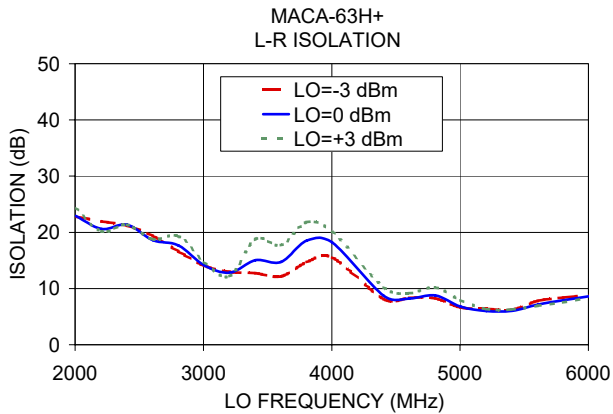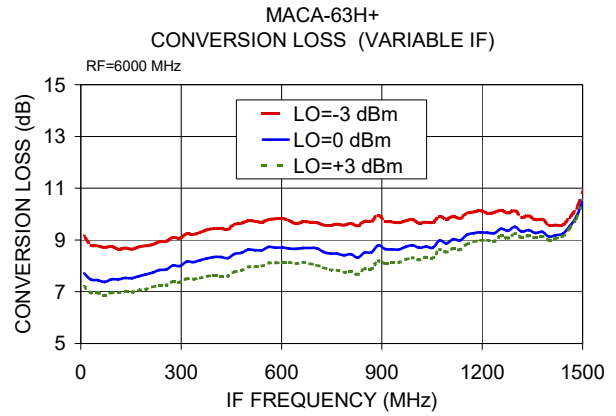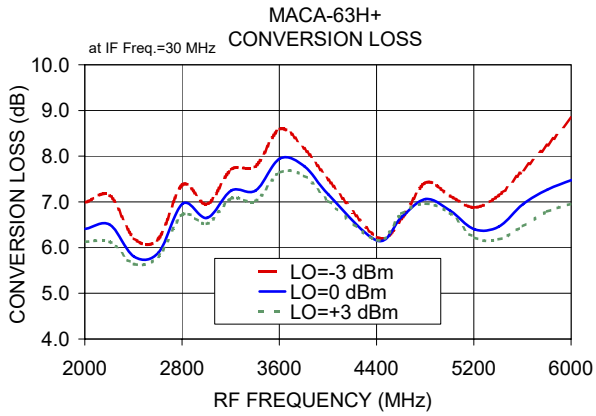

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Frequency Mixer

# MACA-63H+

## Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)			RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)			RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+10dBm (dB)		
		@LO (dBm)					@LO (dBm)					@LO (dBm)		
		-3	0	+3			-3	0	+3			-3	0	+3
1540.1	1510.1	8.10	6.93	6.44	1540.1	1510.1	17.30	17.74	17.53	1540.1	1510.1	2.36	2.20	2.06
1660.1	1630.1	7.87	7.28	7.00	1660.1	1630.1	15.35	17.28	18.11	1660.1	1630.1	1.77	1.51	1.34
1780.1	1750.1	7.66	7.00	6.61	1780.1	1750.1	17.57	18.29	20.20	1780.1	1750.1	1.31	1.10	1.01
1900.1	1870.1	7.12	6.43	6.07	1900.1	1870.1	19.34	24.15	20.96	1900.1	1870.1	1.54	1.26	1.12
2020.1	1990.1	6.99	6.28	5.98	2020.1	1990.1	15.31	19.93	22.33	2020.1	1990.1	1.91	1.53	1.29
2140.1	2110.1	7.36	6.56	6.13	2140.1	2110.1	15.81	17.65	17.90	2140.1	2110.1	2.39	1.74	1.51
2260.1	2230.1	6.86	6.19	5.88	2260.1	2230.1	17.88	20.84	23.09	2260.1	2230.1	2.09	1.36	0.99
2380.1	2350.1	6.25	5.80	5.64	2380.1	2350.1	18.67	18.01	18.00	2380.1	2350.1	1.41	0.99	0.77
2500.1	2470.1	6.10	5.73	5.65	2500.1	2470.1	16.07	16.65	19.01	2500.1	2470.1	1.17	0.77	0.56
2620.1	2590.1	6.18	5.92	5.83	2620.1	2590.1	18.00	23.63	27.44	2620.1	2590.1	1.14	0.74	0.62
2740.1	2710.1	7.20	6.78	6.58	2740.1	2710.1	21.33	21.06	21.66	2740.1	2710.1	1.33	1.06	0.86
2860.1	2830.1	7.59	7.10	6.86	2860.1	2830.1	24.53	24.03	23.29	2860.1	2830.1	0.94	0.71	0.59
2980.1	2950.1	6.93	6.60	6.44	2980.1	2950.1	20.84	21.37	21.29	2980.1	2950.1	0.89	0.66	0.57
3100.1	3070.1	6.74	6.43	6.32	3100.1	3070.1	20.04	20.77	21.22	3100.1	3070.1	0.64	0.36	0.25
3220.1	3190.1	7.66	7.17	6.95	3220.1	3190.1	20.84	21.76	23.11	3220.1	3190.1	0.67	0.41	0.29
3340.1	3310.1	7.43	6.99	6.80	3340.1	3310.1	21.55	23.44	23.32	3340.1	3310.1	0.84	0.49	0.35
3460.1	3430.1	8.16	7.38	7.07	3460.1	3430.1	24.19	22.70	20.89	3460.1	3430.1	0.64	0.60	0.54
3580.1	3550.1	8.83	8.05	7.67	3580.1	3550.1	19.22	22.39	23.62	3580.1	3550.1	0.35	0.43	0.46
3700.1	3670.1	8.70	8.08	7.78	3700.1	3670.1	17.69	19.45	20.28	3700.1	3670.1	0.29	0.36	0.39
3820.1	3790.1	8.26	7.78	7.52	3820.1	3790.1	16.78	18.08	18.79	3820.1	3790.1	0.44	0.43	0.46
3940.1	3910.1	7.64	7.29	7.10	3940.1	3910.1	15.78	15.98	16.33	3940.1	3910.1	0.79	0.70	0.68
4060.1	4030.1	7.04	6.71	6.58	4060.1	4030.1	16.06	17.52	17.80	4060.1	4030.1	0.98	0.80	0.70
4180.1	4150.1	6.51	6.33	6.28	4180.1	4150.1	17.47	17.86	17.64	4180.1	4150.1	0.94	0.72	0.65
4300.1	4270.1	6.07	5.94	5.90	4300.1	4270.1	16.22	17.14	17.23	4300.1	4270.1	0.97	0.71	0.65
4420.1	4390.1	5.95	5.83	5.81	4420.1	4390.1	15.67	17.50	18.21	4420.1	4390.1	0.78	0.47	0.39
4540.1	4510.1	6.05	6.00	6.01	4540.1	4510.1	17.09	18.90	20.00	4540.1	4510.1	0.65	0.31	0.21
4660.1	4630.1	7.07	6.90	6.88	4660.1	4630.1	17.07	28.06	26.02	4660.1	4630.1	0.82	0.63	0.52
4780.1	4750.1	7.59	6.99	6.85	4780.1	4750.1	18.35	20.49	20.05	4780.1	4750.1	1.05	1.11	1.03
4900.1	4870.1	7.12	6.62	6.51	4900.1	4870.1	15.22	15.92	16.43	4900.1	4870.1	1.30	1.25	1.12
5040.1	5010.1	7.08	6.48	6.28	5040.1	5010.1	15.95	16.32	16.60	5040.1	5010.1	1.23	1.08	0.96
5160.1	5130.1	6.97	6.33	6.06	5160.1	5130.1	17.84	17.83	17.98	5160.1	5130.1	1.25	1.04	0.91
5300.1	5270.1	7.07	6.38	6.09	5300.1	5270.1	21.82	19.89	18.62	5300.1	5270.1	1.04	0.86	0.71
5420.1	5390.1	7.33	6.44	6.03	5420.1	5390.1	20.20	20.97	19.88	5420.1	5390.1	0.93	0.76	0.64
5560.1	5530.1	7.49	6.60	6.17	5560.1	5530.1	21.53	21.35	22.32	5560.1	5530.1	1.12	0.83	0.72
5680.1	5650.1	7.89	6.99	6.48	5680.1	5650.1	23.88	22.65	21.08	5680.1	5650.1	1.07	0.73	0.65
5820.1	5790.1	8.06	7.03	6.53	5820.1	5790.1	21.20	21.66	21.50	5820.1	5790.1	1.28	0.77	0.64
5940.1	5910.1	8.54	7.18	6.64	5940.1	5910.1	20.32	20.26	20.66	5940.1	5910.1	1.17	0.79	0.63
6080.1	6050.1	9.36	7.43	6.82	6080.1	6050.1	16.83	18.58	19.94	6080.1	6050.1	0.96	0.90	0.71
6200.1	6170.1	11.46	7.98	7.02	6200.1	6170.1	11.32	16.69	18.71	6200.1	6170.1	0.04	1.38	1.09
6340.1	6310.1	19.54	12.58	8.82	6340.1	6310.1	3.92	10.52	18.64	6340.1	6310.1	-5.15	-0.90	0.86

# Frequency Mixer

# MACA-63H+

## Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=4000.1001MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=2000.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=6000.1001MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		0			0			0
1090.0	2910.1	11.51	10.0	2010.1	6.78	1530.0	4470.1	12.61
1038.6	2961.5	11.31	50.0	2050.1	6.56	1490.0	4510.1	10.32
987.1	3013.0	11.11	90.0	2090.1	6.48	1450.0	4550.1	9.48
935.7	3064.4	11.05	130.0	2130.1	6.80	1410.0	4590.1	9.27
884.3	3115.8	10.84	170.0	2170.1	6.59	1370.0	4630.1	9.34
832.9	3167.2	10.33	210.0	2210.1	6.29	1330.0	4670.1	9.29
781.4	3218.7	10.30	250.0	2250.1	6.11	1290.0	4710.1	9.33
730.0	3270.1	9.67	290.0	2290.1	6.00	1250.0	4750.1	9.22
678.6	3321.5	9.27	330.0	2330.1	6.07	1210.0	4790.1	9.21
627.1	3373.0	8.61	370.0	2370.1	6.10	1170.0	4830.1	9.29
575.7	3424.4	8.28	410.0	2410.1	6.17	1130.0	4870.1	9.06
524.3	3475.8	8.00	450.0	2450.1	6.24	1090.0	4910.1	9.07
472.9	3527.2	7.85	490.0	2490.1	6.17	1050.0	4950.1	8.91
421.4	3578.7	7.81	530.0	2530.1	6.17	1010.0	4990.1	8.91
370.0	3630.1	7.85	570.0	2570.1	6.22	970.0	5030.1	8.93
318.6	3681.5	7.35	610.0	2610.1	6.35	930.0	5070.1	8.85
267.1	3733.0	7.21	650.0	2650.1	6.50	890.0	5110.1	8.95
215.7	3784.4	7.11	690.0	2690.1	6.84	850.0	5150.1	8.69
164.3	3835.8	7.07	730.0	2730.1	7.04	810.0	5190.1	8.63
112.9	3887.2	7.00	770.0	2770.1	7.13	770.0	5230.1	8.69
44.3	3955.8	7.02	810.0	2810.1	7.36	730.0	5270.1	8.74
10.0	4010.1	7.48	850.0	2850.1	7.51	690.0	5310.1	8.93
101.4	4101.5	6.80	890.0	2890.1	7.75	650.0	5350.1	8.80
170.0	4170.1	6.95	930.0	2930.1	7.59	610.0	5390.1	8.81
261.4	4261.5	7.12	970.0	2970.1	7.66	570.0	5430.1	8.77
330.0	4330.1	7.05	1010.0	3010.1	7.72	530.0	5470.1	8.69
421.4	4421.5	6.86	1050.0	3050.1	7.92	490.0	5510.1	8.64
490.0	4490.1	7.08	1090.0	3090.1	8.14	450.0	5550.1	8.54
581.4	4581.5	7.40	1130.0	3130.1	8.11	410.0	5590.1	8.47
650.0	4650.1	7.46	1170.0	3170.1	8.37	370.0	5630.1	8.37
741.4	4741.5	7.44	1210.0	3210.1	8.63	330.0	5670.1	8.18
810.0	4810.1	7.58	1250.0	3250.1	9.06	290.0	5710.1	8.01
901.4	4901.5	7.94	1290.0	3290.1	9.29	250.0	5750.1	7.76
970.0	4970.1	8.16	1330.0	3330.1	9.44	210.0	5790.1	7.67
1061.4	5061.5	8.44	1370.0	3370.1	9.56	170.0	5830.1	7.52
1130.0	5130.1	8.63	1390.0	3390.1	9.71	130.0	5870.1	7.44
1221.4	5221.5	8.66	1430.0	3430.1	10.08	90.0	5910.1	7.33
1290.0	5290.1	9.16	1450.0	3450.1	10.36	70.0	5930.1	7.28
1381.4	5381.5	10.52	1490.0	3490.1	11.51	30.0	5970.1	7.33
1450.0	5450.1	11.69	1510.0	3510.1	12.39	10.0	5990.1	7.57

# Frequency Mixer

# MACA-63H+

## Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	-3	0	+3	-3	0	+3
1510.1	9.30	8.53	9.33	1.24	1.26	4.02
1630.1	11.06	12.21	13.55	13.09	14.32	15.85
1750.1	17.69	18.69	21.10	12.93	14.25	15.68
1870.1	21.28	22.64	26.61	21.96	23.34	24.95
1990.1	21.41	21.98	23.94	37.31	38.49	39.74
2110.1	21.33	21.19	21.54	47.48	47.78	48.44
2230.1	21.56	23.08	23.38	39.72	39.81	40.25
2350.1	20.17	20.78	20.53	34.65	34.50	34.99
2470.1	21.55	22.65	22.60	33.74	33.48	33.92
2590.1	18.22	18.16	18.75	34.78	34.17	34.61
2710.1	17.39	18.36	19.69	36.28	35.58	35.94
2830.1	16.17	17.18	18.77	37.70	37.11	37.46
2950.1	14.99	15.38	16.30	38.32	38.02	38.38
3070.1	14.46	14.13	13.84	38.26	38.29	38.81
3190.1	13.61	13.75	13.82	37.44	37.97	39.04
3310.1	13.49	15.05	17.68	36.35	37.32	38.77
3430.1	13.06	15.26	18.30	35.38	36.83	38.85
3550.1	12.59	15.24	18.21	34.70	36.60	38.99
3670.1	13.06	16.20	19.21	33.20	35.40	38.01
3790.1	16.65	21.05	24.75	31.65	33.88	36.48
3910.1	20.49	24.47	26.57	32.10	34.00	36.31
4030.1	13.90	15.90	18.12	33.42	34.92	36.95
4150.1	10.91	12.44	14.38	35.63	36.91	38.56
4270.1	9.66	10.75	12.47	37.37	38.04	39.34
4390.1	9.15	9.87	11.53	38.60	38.66	39.82
4510.1	9.20	9.47	10.75	38.91	38.47	39.40
4630.1	9.91	10.59	12.03	39.23	38.49	39.19
4750.1	8.96	9.64	11.28	38.83	38.03	38.64
4870.1	8.38	8.88	10.44	38.15	37.35	37.89
5010.1	7.91	7.90	8.97	37.56	36.79	37.15
5130.1	7.59	7.55	8.13	36.79	36.47	36.70
5270.1	7.24	7.14	7.38	35.65	35.51	35.78
5390.1	7.60	7.20	7.35	33.43	34.01	34.95
5530.1	9.13	8.43	8.24	32.40	33.37	34.50
5650.1	9.17	8.71	8.48	33.67	34.17	34.76
5790.1	8.95	8.79	8.70	35.21	34.96	34.80
5910.1	9.09	9.11	9.08	35.52	34.88	34.29
6050.1	9.75	9.89	9.79	34.72	33.96	32.98
6170.1	11.45	11.74	12.30	32.90	32.62	31.91
6310.1	13.47	13.77	13.51	29.51	29.56	29.41

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		-3	0	+3
1540.1	1510.1	19.31	18.56	18.22
1660.1	1630.1	29.56	26.93	25.57
1780.1	1750.1	34.55	32.45	31.11
1900.1	1870.1	46.45	45.43	44.45
2020.1	1990.1	53.33	54.01	54.63
2140.1	2110.1	53.90	54.67	55.29
2260.1	2230.1	54.69	54.58	54.25
2380.1	2350.1	54.15	52.80	51.72
2500.1	2470.1	53.03	51.80	50.99
2620.1	2590.1	52.72	52.21	51.83
2740.1	2710.1	55.85	55.64	55.26
2860.1	2830.1	61.50	60.72	60.13
2980.1	2950.1	59.42	58.85	58.78
3100.1	3070.1	57.81	57.31	57.21
3220.1	3190.1	60.33	60.14	60.67
3340.1	3310.1	60.46	60.72	60.45
3460.1	3430.1	56.17	56.33	56.23
3580.1	3550.1	52.70	52.87	53.08
3700.1	3670.1	51.06	51.46	51.68
3820.1	3790.1	52.52	53.06	53.22
3940.1	3910.1	57.35	58.13	58.61
4060.1	4030.1	56.60	57.05	57.19
4180.1	4150.1	53.60	53.62	53.63
4300.1	4270.1	52.63	52.52	52.58
4420.1	4390.1	50.86	50.61	50.48
4540.1	4510.1	48.99	48.40	48.14
4660.1	4630.1	47.23	46.57	46.40
4780.1	4750.1	48.47	47.41	46.96
4900.1	4870.1	47.51	46.23	45.71
5040.1	5010.1	45.49	44.28	43.74
5160.1	5130.1	43.70	42.92	42.56
5300.1	5270.1	41.96	41.36	40.98
5420.1	5390.1	44.15	44.03	43.73
5560.1	5530.1	43.27	43.56	43.62
5680.1	5650.1	40.64	41.10	41.47
5820.1	5790.1	38.93	39.31	39.63
5940.1	5910.1	37.39	37.80	38.08
6080.1	6050.1	35.85	36.47	36.81
6200.1	6170.1	34.49	35.94	36.79
6340.1	6310.1	33.08	34.94	37.96

# Frequency Mixer

# MACA-63H+

## Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=6000MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		-3	0	+3		-3	0	+3		-3	0	+3
1540.1	1510.1	2.20	1.85	1.69	1510.1	3.54	3.65	3.82	10.0	2.12	1.43	1.17
1660.1	1630.1	2.53	2.19	2.04	1630.1	3.56	3.55	3.60	50.0	2.15	1.46	1.22
1780.1	1750.1	2.83	2.53	2.36	1750.1	4.00	3.91	3.93	90.0	2.22	1.53	1.30
1900.1	1870.1	2.85	2.53	2.37	1870.1	4.47	4.44	4.48	130.0	2.31	1.62	1.38
2020.1	1990.1	2.90	2.49	2.31	1990.1	4.92	5.02	5.17	170.0	2.49	1.76	1.52
2140.1	2110.1	3.15	2.72	2.44	2110.1	5.27	5.51	5.72	210.0	2.63	1.88	1.62
2260.1	2230.1	2.67	2.31	2.14	2230.1	4.60	4.83	4.98	250.0	2.84	2.04	1.76
2380.1	2350.1	2.58	2.27	2.13	2350.1	3.73	3.65	3.61	290.0	3.00	2.16	1.86
2500.1	2470.1	2.33	2.00	1.89	2470.1	3.31	3.17	3.10	330.0	3.22	2.33	2.01
2620.1	2590.1	2.13	1.93	1.86	2590.1	3.11	2.99	2.93	370.0	3.45	2.50	2.14
2740.1	2710.1	3.13	2.93	2.83	2710.1	2.90	2.88	2.86	410.0	3.58	2.60	2.22
2860.1	2830.1	4.03	3.81	3.67	2830.1	2.75	2.81	2.82	470.0	3.89	2.84	2.43
2980.1	2950.1	3.48	3.30	3.19	2950.1	2.69	2.78	2.82	510.0	3.98	2.93	2.50
3100.1	3070.1	2.92	2.68	2.52	3070.1	2.70	2.77	2.78	570.0	4.26	3.16	2.69
3220.1	3190.1	3.52	3.26	3.13	3190.1	2.79	2.78	2.71	610.0	4.40	3.28	2.80
3340.1	3310.1	3.27	2.98	2.78	3310.1	2.83	2.72	2.61	670.0	4.68	3.47	2.98
3460.1	3430.1	3.95	3.67	3.50	3430.1	2.66	2.46	2.33	710.0	4.88	3.65	3.14
3580.1	3550.1	4.03	3.72	3.57	3550.1	2.35	2.17	2.08	770.0	5.14	3.86	3.31
3700.1	3670.1	3.95	3.63	3.48	3670.1	2.03	1.91	1.92	810.0	5.39	4.05	3.50
3820.1	3790.1	3.71	3.47	3.33	3790.1	1.67	1.64	1.75	870.0	5.58	4.22	3.63
3940.1	3910.1	3.46	3.25	3.13	3910.1	1.39	1.44	1.59	910.0	5.79	4.42	3.82
4060.1	4030.1	2.72	2.48	2.37	4030.1	1.34	1.41	1.60	970.0	5.93	4.51	3.89
4180.1	4150.1	2.26	2.11	2.04	4150.1	1.36	1.45	1.64	1010.0	6.07	4.67	4.03
4300.1	4270.1	1.84	1.70	1.63	4270.1	1.37	1.47	1.67	1070.0	5.93	4.53	3.90
4420.1	4390.1	1.52	1.38	1.34	4390.1	1.38	1.51	1.74	1110.0	5.87	4.53	3.91
4540.1	4510.1	1.44	1.42	1.44	4510.1	1.45	1.58	1.81	1170.0	5.34	4.13	3.60
4660.1	4630.1	1.93	1.94	1.95	4630.1	1.52	1.64	1.86	1210.0	4.84	3.78	3.31
4780.1	4750.1	1.89	1.73	1.69	4750.1	1.59	1.68	1.88	1270.0	3.92	3.14	2.83
4900.1	4870.1	1.51	1.33	1.25	4870.1	1.67	1.73	1.90	1310.0	3.13	2.57	2.38
5040.1	5010.1	1.43	1.28	1.23	5010.1	1.73	1.78	1.93	1370.0	2.01	1.87	1.90
5160.1	5130.1	1.56	1.47	1.46	5130.1	1.72	1.74	1.85	1410.0	1.42	1.60	1.77
5300.1	5270.1	1.73	1.62	1.59	5270.1	1.64	1.63	1.69	1470.0	1.70	2.00	2.20
5420.1	5390.1	1.92	1.74	1.65	5390.1	1.56	1.55	1.59	1510.0	2.33	2.53	2.66
5560.1	5530.1	2.27	2.07	1.95	5530.1	1.41	1.42	1.48	1570.0	2.90	2.96	3.00
5680.1	5650.1	2.54	2.33	2.19	5650.1	1.32	1.36	1.40	1610.0	3.91	3.91	3.91
5820.1	5790.1	2.78	2.54	2.38	5790.1	1.33	1.36	1.40	1670.0	6.56	6.46	6.42
5940.1	5910.1	3.08	2.72	2.54	5910.1	1.40	1.42	1.44	1710.0	8.47	8.31	8.23
6080.1	6050.1	3.26	2.77	2.57	6050.1	1.48	1.49	1.50	1770.0	11.61	11.46	11.46
6200.1	6170.1	3.53	2.75	2.46	6170.1	1.51	1.50	1.52	1810.0	13.60	13.49	13.49
6340.1	6310.1	3.82	3.10	2.61	6310.1	1.55	1.50	1.43	1870.0	16.56	16.56	16.56

## Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	23	43	25	47	60	52	---	---	---	---
1	-	51	+0	58	52	50	70	70	58	---	---	---
2	76	72	77	46	76	>78	64	>78	>78	71	---	---
3	>90	74	>78	>78	53	>78	>78	>78	>78	>78	>78	---
4	>90	>78	>78	>78	>78	71	>78	>78	>78	>78	>78	>78
5	>90	>78	>78	>78	>78	>78	>78	>78	>78	>78	>78	>78
6	---	---	>78	>78	>78	>78	>78	>78	>78	>78	>78	>78
7	---	---	---	>78	>78	>78	>78	>78	>78	>78	>78	>78
8	---	---	---	---	>78	>78	>78	>78	>78	>78	>78	>78
9	---	---	---	---	---	>78	>78	>78	>78	>78	>78	>78
10	---	---	---	---	---	---	>78	>78	>78	>78	>78	>78
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

### LO HARMONICS ORDER

Test conditions: RF IN: 4000.1 MHz; -5.00 dBm.  
 LO IN: 3970.1 MHz; +0.00 dBm  
 IF OUT: 30 MHz; -12.15 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	33	54	37	58	75	60	---	---	---	---
1	-	52	+0	60	49	57	69	68	70	---	---	---
2	57	65	70	53	71	72	59	79	>88	74	---	---
3	80	54	64	77	36	81	75	68	84	>88	77	---
4	>90	>88	77	83	>88	67	>88	>88	76	>88	>88	88
5	>90	>88	>88	79	80	>88	49	>88	85	78	>88	>88
6	---	---	>88	>88	>88	>88	>88	66	>88	>88	85	>88
7	---	---	---	>88	>88	>88	>88	>88	61	>88	>88	87
8	---	---	---	---	>88	>88	>88	>88	>88	71	>88	>88
9	---	---	---	---	---	>88	>88	>88	>88	>88	72	>88
10	---	---	---	---	---	---	>88	>88	>88	>88	>88	77
	RF CAL	0	1	2	3	4	5	6	7	8	9	10


### LO HARMONICS ORDER

Test conditions: RF IN: 4000.1 MHz; 5.00 dBm.  
 LO IN: 3970.1 MHz; +0.00 dBm  
 IF OUT: 30 MHz; -2.24 dBm


- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.  
 2. + entry denotes harmonics are in (dBc) above IF OUTPUT.  
 3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

## Typical Performance Curves


Conversion Loss @ IF=30MHz

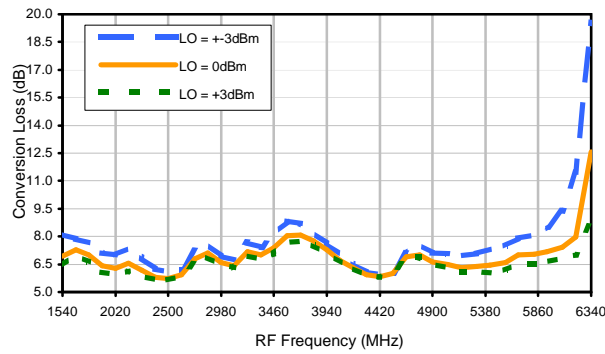


Conversion Loss vs. LO @ RF=4000.1001MHz

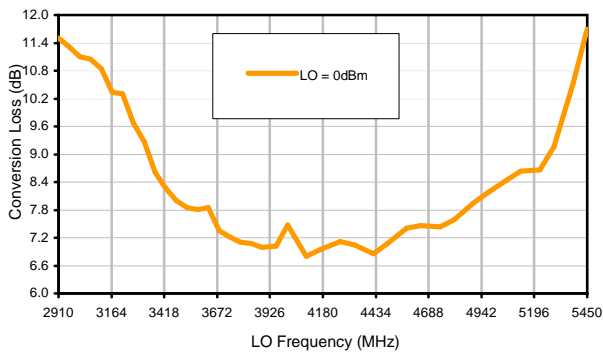


Conversion Loss vs. IF @ RF=4000.1001MHz

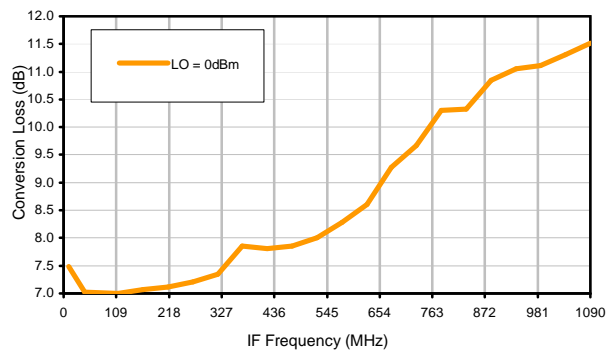


Conversion Loss vs. IF @ RF=2000.1MHz

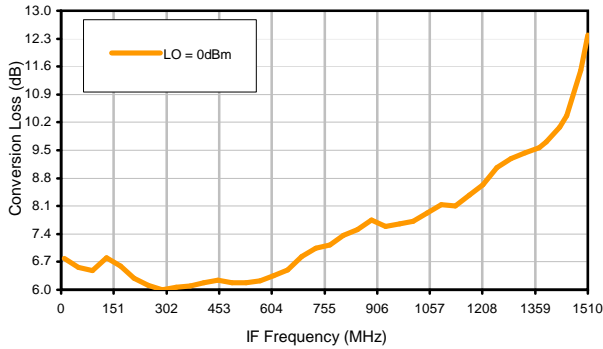


Conversion Loss vs. IF @ RF=6000.1001MHz

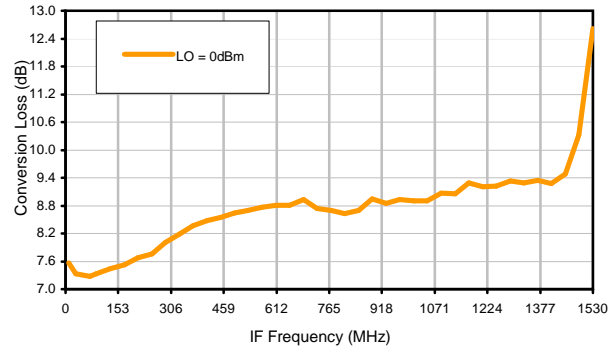

IP3 Input

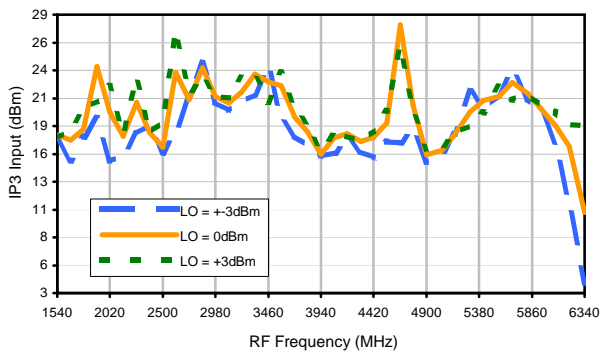


Compression @ RF IN=+10dBm

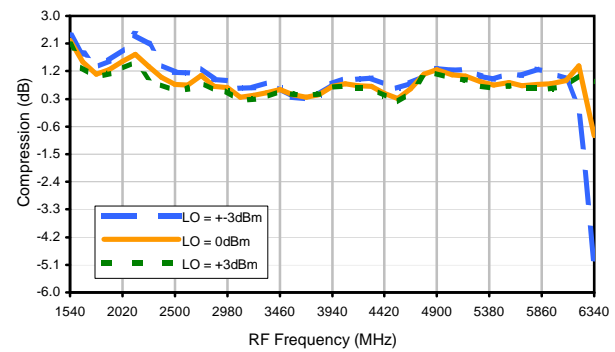




## Typical Performance Curves


LO-RF Isolation

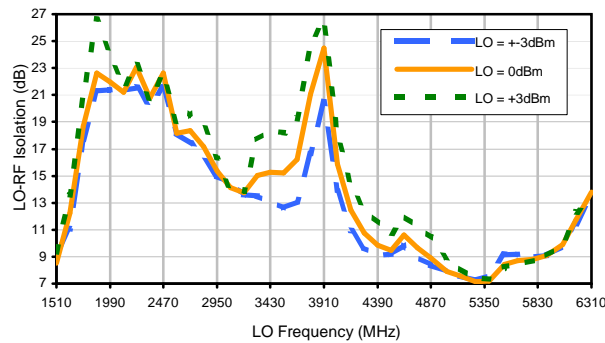


LO-IF Isolation

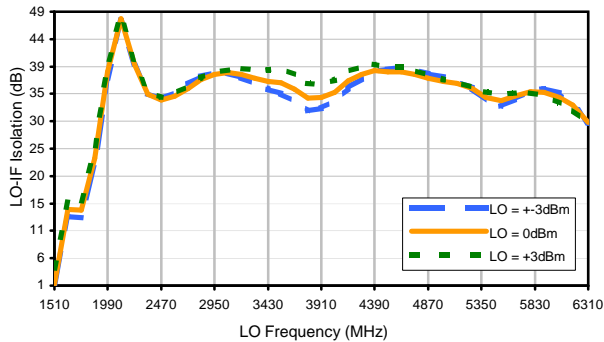


RF-IF Isolation

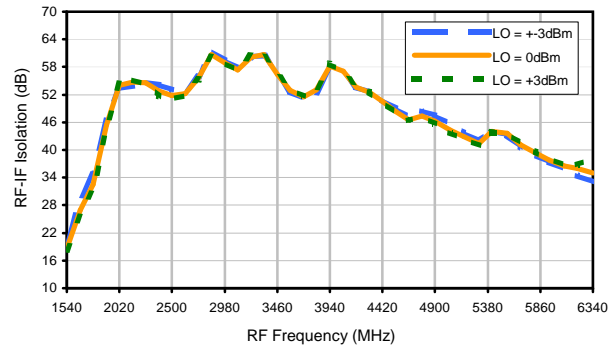


RF VSWR

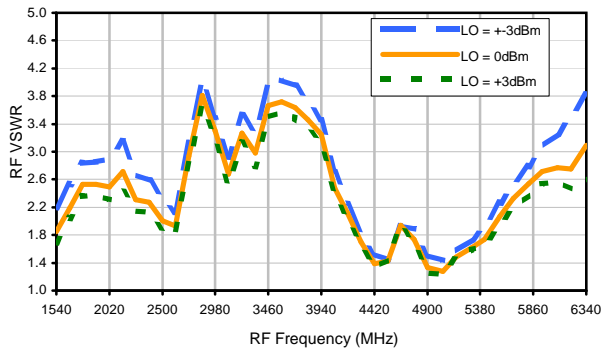

LO VSWR

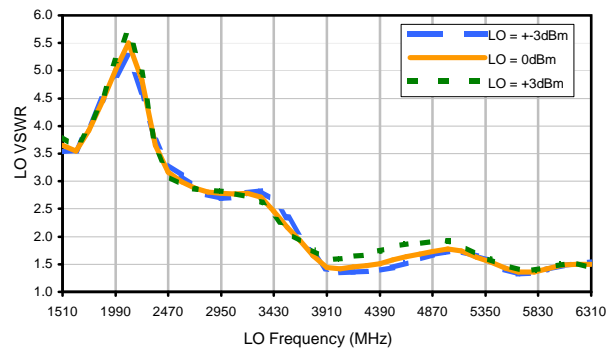

IF VSWR

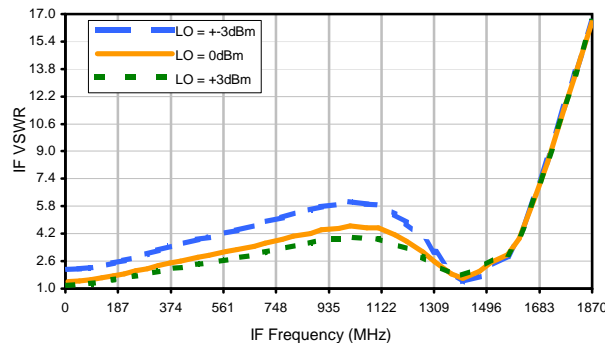

## Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(dBc)										
0	-	-	23	43	25	47	60	52	---	---	---	---
1	-	51	+0	58	52	50	70	70	58	---	---	---
2	76	72	77	46	76	>78	64	>78	>78	71	---	---
3	>90	74	>78	>78	53	>78	>78	>78	>78	>78	>78	---
4	>90	>78	>78	>78	>78	71	>78	>78	>78	>78	>78	>78
5	>90	>78	>78	>78	>78	>78	>78	>78	>78	>78	>78	>78
6	---	---	>78	>78	>78	>78	>78	>78	>78	>78	>78	>78
7	---	---	---	>78	>78	>78	>78	>78	>78	>78	>78	>78
8	---	---	---	---	>78	>78	>78	>78	>78	>78	>78	>78
9	---	---	---	---	---	>78	>78	>78	>78	>78	>78	>78
10	---	---	---	---	---	---	>78	>78	>78	>78	>78	>78
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

### LO HARMONICS ORDER

Test conditions: RF IN: 4000.1 MHz; -5.00 dBm.  
 LO IN: 3970.1 MHz; +0.00 dBm  
 IF OUT: 30 MHz; -12.15 dBm

RF HARMONICS ORDER


	(-dBm)	(dBc)										
0	-	-	33	54	37	58	75	60	---	---	---	---
1	-	52	+0	60	49	57	69	68	70	---	---	---
2	57	65	70	53	71	72	59	79	>88	74	---	---
3	80	54	64	77	36	81	75	68	84	>88	77	---
4	>90	>88	77	83	>88	67	>88	>88	76	>88	>88	88
5	>90	>88	>88	79	80	>88	49	>88	85	78	>88	>88
6	---	---	>88	>88	>88	>88	>88	66	>88	>88	85	>88
7	---	---	---	>88	>88	>88	>88	>88	61	>88	>88	87
8	---	---	---	---	>88	>88	>88	>88	>88	71	>88	>88
9	---	---	---	---	---	>88	>88	>88	>88	>88	72	>88
10	---	---	---	---	---	---	>88	>88	>88	>88	>88	77
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

### LO HARMONICS ORDER


Test conditions: RF IN: 4000.1 MHz; 5.00 dBm.  
 LO IN: 3970.1 MHz; +0.00 dBm  
 IF OUT: 30 MHz; -2.24 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.  
 2. + entry denotes harmonics are in (dBc) above IF OUTPUT.  
 3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

## Outline Dimensions

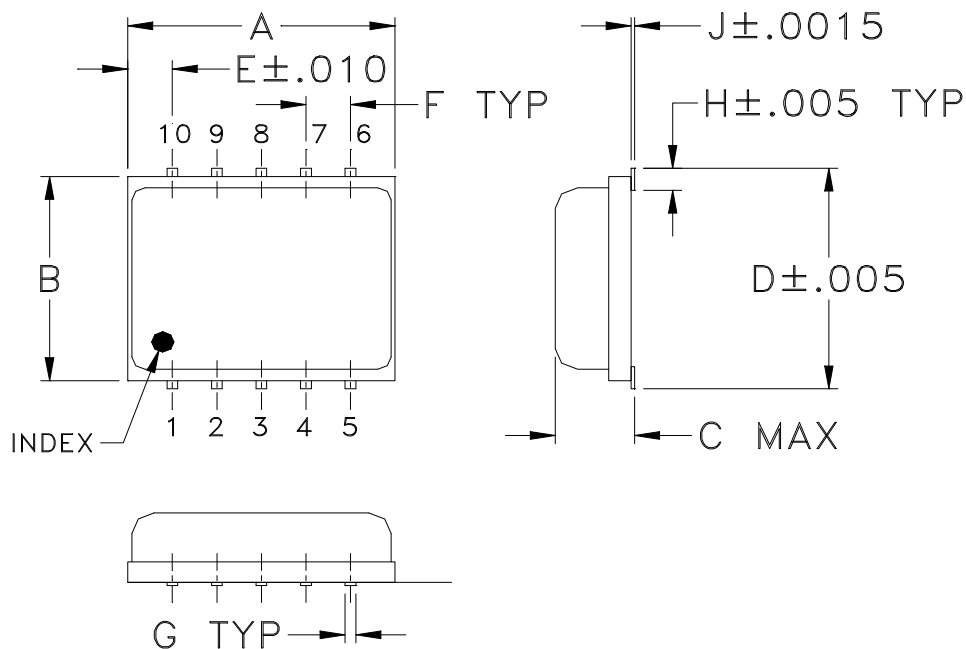

## PCB Land Pattern

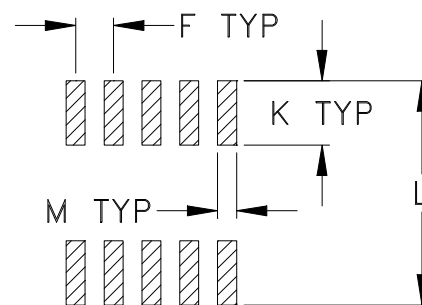

Suggested Layout,  
Tolerance to be within  $\pm .002$

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	WT. GRAMS
DZ885	.30 (7.62)	.250 (6.35)	.085 (2.16)	.266 (6.76)	.050 (1.27)	.050 (1.27)	.012 (0.30)	.029 (0.74)	.004 (0.10)	.085 (2.16)	.296 (7.52)	.030 (0.76)	0.25
DZ1034			.105 (2.67)										0.3

Dimensions are in inches (mm). Tolerances: 2Pl.  $\pm .01$ ; 3Pl.  $\pm .005$

### Notes:

- Case material: Plastic encapsulation on Ceramic base.
- Termination finish:
  - For RoHS Case Styles: Tin plate. All models, (+) suffix.
  - For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.

# Tape & Reel Packaging TR-F34



Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note	
16	12	7	Small quantity standard (see note)	20
				50
				100
				200
		13	Standard	500
				1000

Note: Availability of small reel quantity varies by model.  
Refer to pricing and availability on individual model dashboard.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: [www.minicircuits.com/pages/pdfs/tape.pdf](http://www.minicircuits.com/pages/pdfs/tape.pdf)




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION



REVISIONS

REV OR	ECN No.	DESCRIPTION	DATE	DR	AUTH
	M115195	NEW RELEASE	12/24/07	AV	DJ

SUGGESTED MOUNTING CONFIGURATION FOR DZ1034 CASE STYLE, "10MA01" PIN CODE

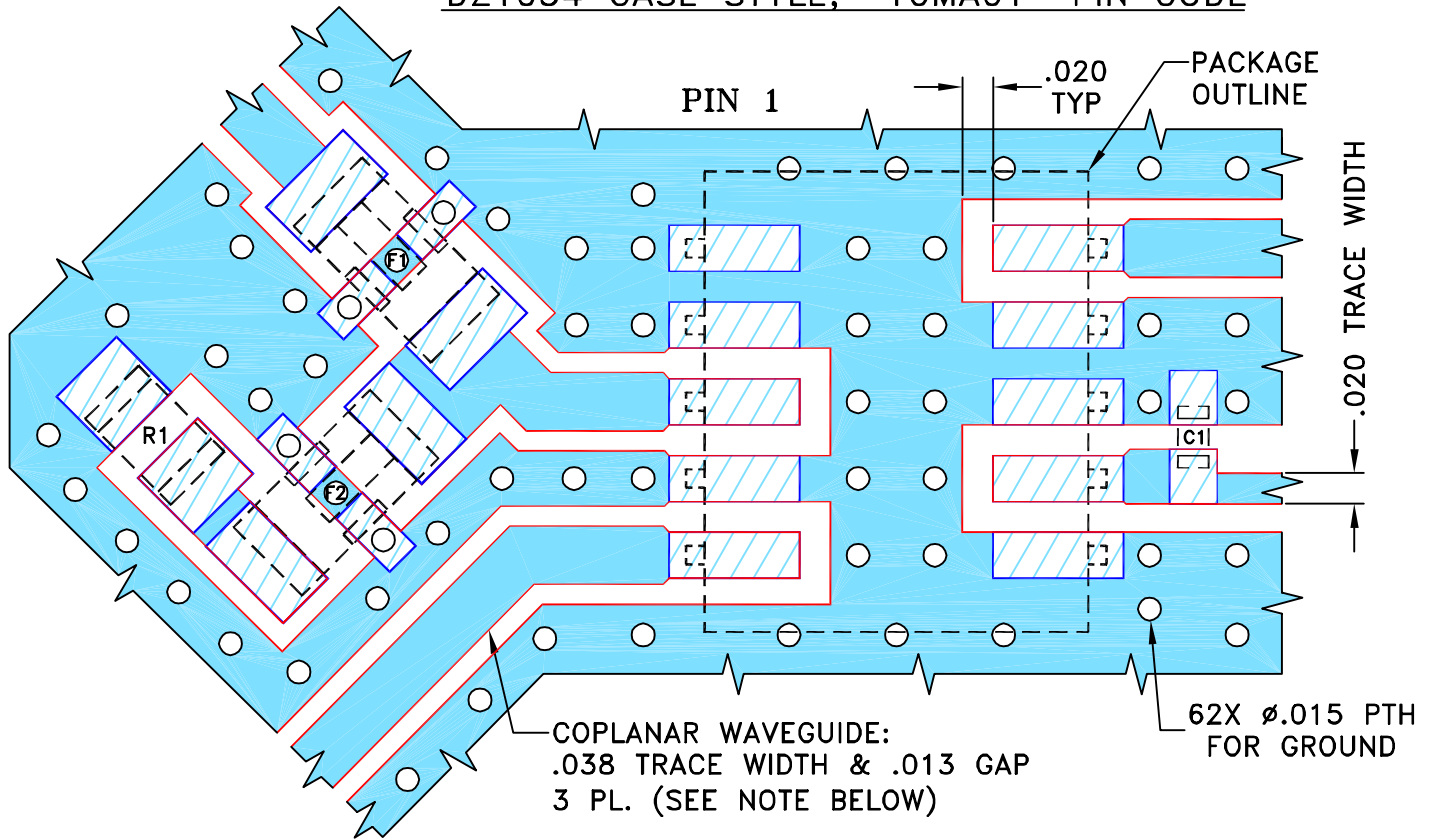

CAPACITOR C1: 1000 pF, 0402 SIZE  
 RESISTOR R1: 49.9 Ohm, 0805 SIZE  
 FILTER F1: LFCN-1400+, FV1206 CASE STYLE  
 FILTER F2: HFCN-1810+, FV1206 CASE STYLE

- NOTE: 1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED	INITIALS	DATE
DIMENSIONS ARE IN INCHES	DRAWN AV	12/24/07
TOLERANCES ON:	CHECKED PW	12/24/07
2 PL DECIMALS ±	APPROVED DJ	12/24/07
3 PL DECIMALS ± .005		
ANGLES ±		
FRACTIONS ±		



**Mini-Circuits®** 13 Neptune Avenue  
 Brooklyn NY 11235

PL, 10MA01, DZ1034, MACA-63H+, TB-404

Mini-Circuits®  
 THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.  
 ASHEETA1.DWG REV:A DATE:01/12/95

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-283	OR
FILE:	98PL283	SCALE: 8:1	SHEET: 1 OF 1

# Evaluation Board and Circuit

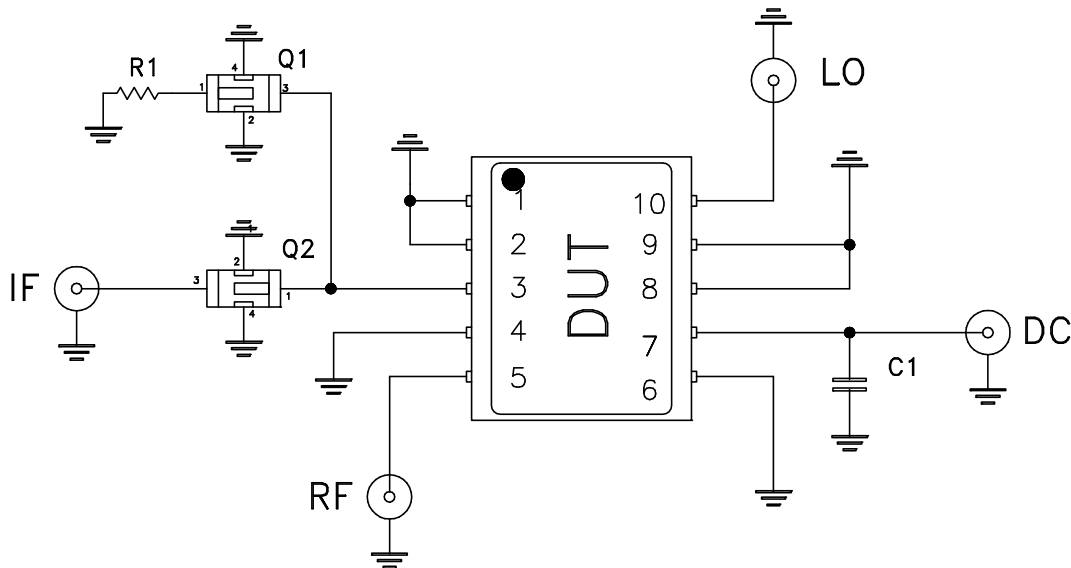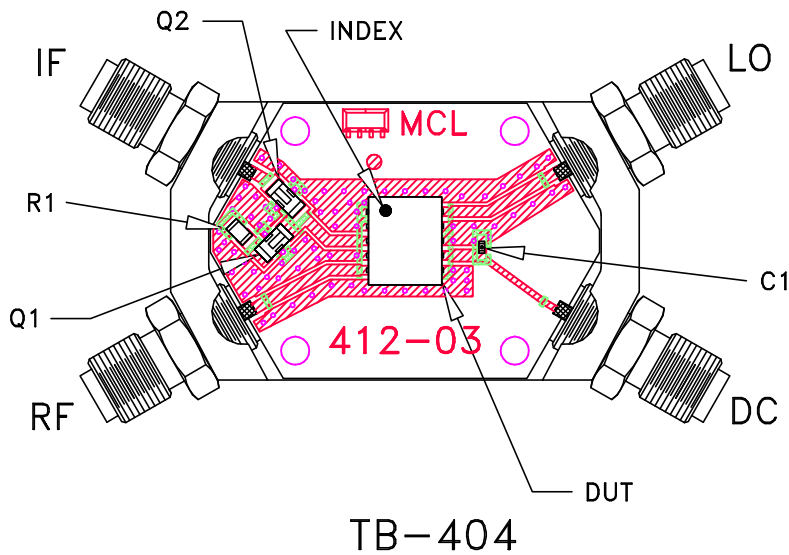

COMPONENT	VALUE	SIZE
DUT	MACA-63H+	7.62X6.35 mm
C1	Capacitor 0.001 uF	0402
R1	Resistor 49.9 Ohm	0805
Q1	MCL High Pass Filter HFCN-1810+	3.20X1.60 mm
Q2	MCL Low Pass Filter LFCN-1200+	

## SCHEMATIC DIAGRAM

### Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,  
Dielectric Constant=3.5, Thickness=.020 inch.

**Mini-Circuits®**

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Autoclave	15 psig, 100% RH, 121°C, 96 hours	JESD22-A102-C, Condition C
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutectic Process: 225°C peak Pb-Free Process: 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2; Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215