High IP3

Frequency Mixer WIDE BAND

MCA-35MH+

Level 13 (LO Power+13 dBm) 500 to 3500 MHz



Generic photo used for illustration purposes only

CASE STYLE: DZ883

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	10, 20, 50, 100, 200
13"	500,1000

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	200 mW
IF Current	40 mA

Pin Connections

LO	10
RF	5
IF	3
GROUND	1,2,4,6,7,8,9


Features


- wide bandwidth, 500 to 3500 MHz
- excellent L-R isolation, 32 dB typ. (1800-2500 MHz)
- good matching 2:1 VSWR typ. (over 1800-2800 MHz)
- small size 0.25"x0.3"x0.2"
- aqueous washable
- triple balanced mixer
- protected by US Patent 6,917,796

Applications

- cellular
- PCN
- PDC
- DECT
- PHS
- WiMAX

Outline Drawing

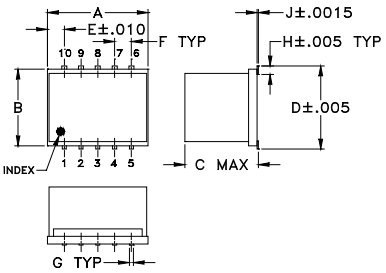




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch / mm)

A	B	C	D	E	F	G
.30	.250	.190	.266	.050	.050	.012
7.62	6.35	4.83	6.76	1.27	1.27	0.30

H	J	K	L	M		wt
.029	.004	.085	.296	.030		grams
0.74	0.10	2.16	7.52	0.76		0.5

Demo Board MCL P/N: TB-144
Suggested PCB Layout (PL-045)



NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Electrical Specifications (T_{AMB}=-55°C to 100°C)

FREQUENCY (MHz)		CONVERSION LOSS (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
LO/RF f_L-f_U	IF	$\overline{X}$	σ	Max.	Typ.	Min.	Typ.	Min.	Typ.
500-3500	**10-1500**	**6.9**	**0.1**	**8.7**	▫		▫		
500-800	10-300	6.3	0.1	7.7	18	11	29	23	19
800-1000	10-200	6.5	0.1	7.7	24	17	28	20	22
1000-1800	10-800	6.6	0.1	8.7	29	20	28	20	20
1800-2000	10-200	6.3	0.1	7.7*	32	25	29	23	19
1800-2500	10-700	5.8	0.1	7.9	32	22	27	20	19
2000-3500	10-1500	6.5	0.1	8.7	29	17	23	15	19


1 dB COMPR. +9 dBm typ.
*Conversion loss tested at 30 MHz IF

▫see individual band specs

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +13dBm	LO +13dBm	LO +13dBm	LO +13dBm	LO +13dBm
460.00	490.00	6.07	14.89	31.56	1.65	1.44
820.00	850.00	6.55	22.74	28.78	2.86	1.11
1000.00	1030.00	6.52	27.75	27.75	3.40	1.27
1400.00	1430.00	6.99	32.26	26.14	2.21	1.75
1800.00	1830.00	6.07	32.12	30.09	1.92	1.57
1992.00	2022.00	5.92	33.68	28.32	1.70	1.54
2097.00	2127.00	5.70	32.52	28.29	1.55	1.38
2202.00	2232.00	5.82	31.97	28.76	1.54	1.34
2395.00	2425.00	6.15	30.82	26.29	1.67	1.35
2500.00	2530.00	5.95	30.44	26.01	1.87	1.37
2600.00	2630.00	6.13	31.78	26.48	2.20	1.30
2700.00	2730.00	6.47	30.50	26.37	2.54	1.28
2800.00	2830.00	6.75	30.68	25.93	2.82	1.34
2900.00	2930.00	6.94	30.99	25.14	3.05	1.49
3000.00	3030.00	6.74	28.34	24.21	3.53	1.62
3100.00	3130.00	6.80	29.07	23.03	3.88	1.83
3200.00	3230.00	6.80	28.43	21.62	3.85	2.01
3300.00	3330.00	6.81	27.62	22.07	3.63	2.12
3400.00	3430.00	6.53	27.00	21.28	3.23	2.19
3500.00	3530.00	6.35	24.71	20.83	2.77	2.20


Electrical Schematic

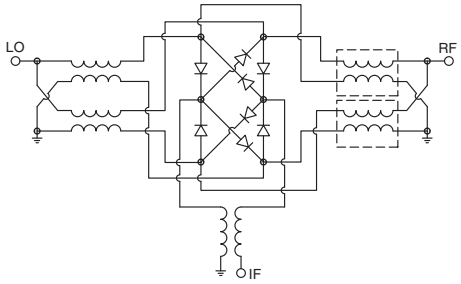


Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp


MCA-35MH+
CONVERSION LOSS
at IF Freq of 30 MHz

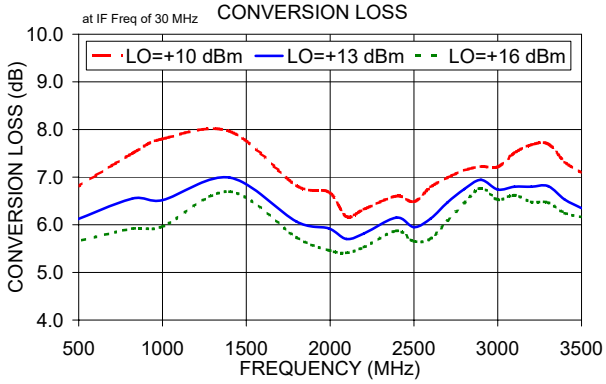


MCA-35MH+
L-R ISOLATION

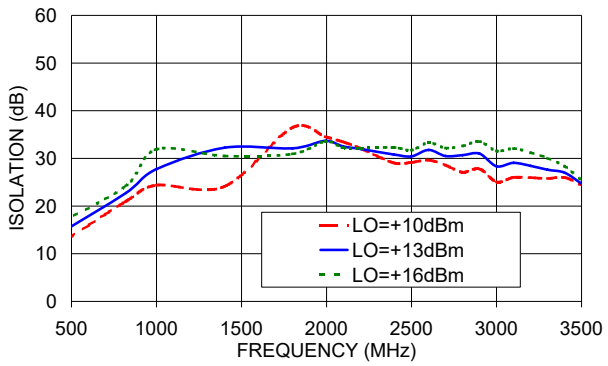


MCA-35MH+
L-I ISOLATION

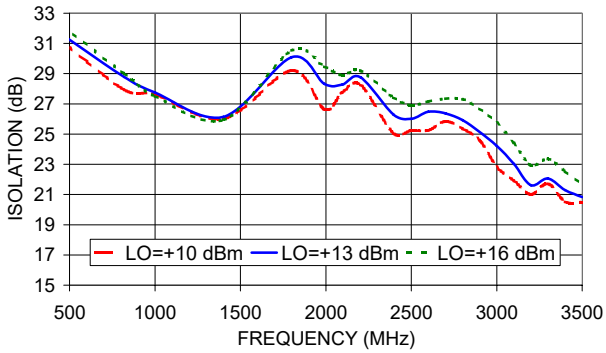


MCA-35MH+
RF VSWR

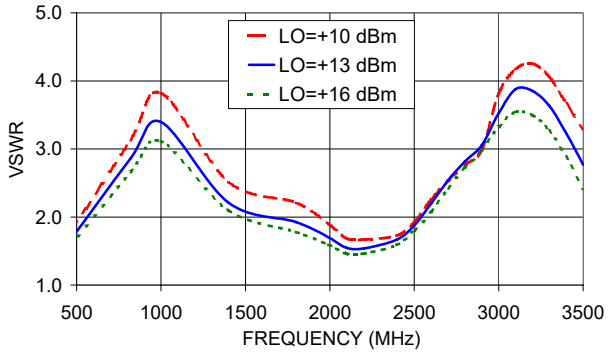


MCA-35MH+
LO VSWR

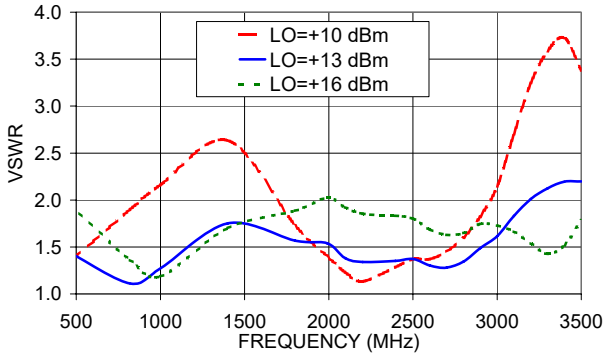


MCA-35MH+
IF VSWR

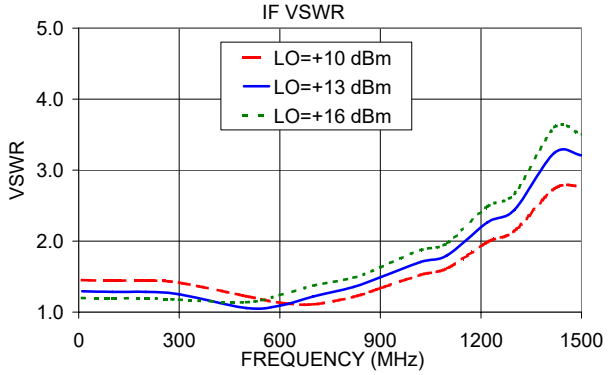

MCA-35MH+
IP3

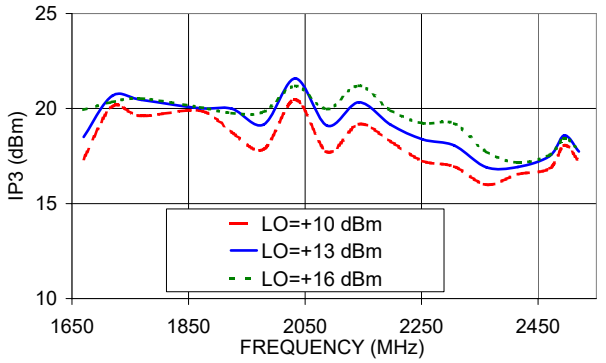

MCA-35MH+
VARIABLE IF
LO=2500 MHz

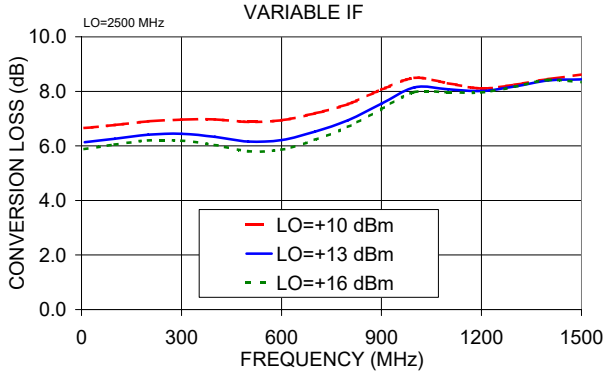

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Frequency Mixer MCA-35MH+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB) @LO (dBm)		
		+10	+13	+16
140.0	170.0	16.43	11.97	10.75
240.0	270.0	9.62	8.38	7.90
340.0	370.0	7.62	7.00	6.63
440.0	470.0	7.07	6.43	6.05
540.0	570.0	6.84	6.15	5.77
640.0	670.0	6.88	6.15	5.68
740.0	770.0	7.20	6.26	5.76
840.0	870.0	7.94	6.85	6.28
940.0	970.0	8.52	6.90	6.29
1040.0	1070.0	9.27	7.63	6.67
1140.0	1170.0	9.43	7.90	6.80
1240.0	1270.0	8.66	7.16	6.52
1340.0	1370.0	8.75	7.60	7.05
1440.0	1470.0	9.47	7.60	7.08
1540.0	1570.0	9.75	8.38	7.78
1640.0	1670.0	8.88	7.67	7.31
1740.0	1770.0	8.62	7.31	6.82
1840.0	1870.0	8.20	7.03	6.54
1940.0	1970.0	8.39	7.22	6.58
2040.0	2070.0	7.97	6.64	6.21
2140.0	2170.0	7.14	6.41	6.12
2240.0	2270.0	6.90	6.32	6.07
2340.0	2370.0	7.03	6.48	6.21
2440.0	2470.0	7.05	6.49	6.21
2540.0	2570.0	7.25	6.58	6.21
2640.0	2670.0	7.17	6.45	6.12
2740.0	2770.0	7.45	6.83	6.51
2840.0	2870.0	7.60	7.14	6.90
2940.0	2970.0	7.92	7.42	7.20
3040.0	3070.0	8.35	7.58	7.35
3140.0	3170.0	8.72	7.77	7.57
3240.0	3270.0	9.37	7.96	7.62
3340.0	3370.0	9.93	8.08	7.67
3440.0	3470.0	10.09	8.13	7.71
3540.0	3570.0	10.11	8.02	7.62
3640.0	3670.0	9.84	8.00	7.55
3720.0	3750.0	9.89	8.26	7.72
3820.0	3850.0	12.11	9.72	8.95
3900.0	3930.0	12.67	10.10	9.24
4000.0	4030.0	14.37	11.57	10.38

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm) @LO (dBm)		
		+10	+13	+16
140.0	170.0	24.72	18.07	22.81
240.0	270.0	20.49	18.31	18.29
340.0	370.0	21.16	18.23	17.42
440.0	470.0	23.42	23.17	18.91
540.0	570.0	16.33	19.46	25.47
640.0	670.0	16.01	18.62	28.20
740.0	770.0	16.96	21.52	28.67
840.0	870.0	16.52	20.35	24.93
940.0	970.0	15.89	27.19	24.80
1040.0	1070.0	14.51	17.70	23.03
1140.0	1170.0	14.55	15.95	21.02
1240.0	1270.0	16.91	20.70	22.75
1340.0	1370.0	18.31	19.05	21.51
1440.0	1470.0	17.94	23.91	24.97
1540.0	1570.0	19.78	19.90	21.59
1640.0	1670.0	18.74	21.09	22.46
1740.0	1770.0	20.01	27.76	23.15
1840.0	1870.0	23.43	28.52	24.14
1940.0	1970.0	17.88	22.76	21.55
2040.0	2070.0	20.73	23.11	20.97
2140.0	2170.0	19.65	19.09	18.72
2240.0	2270.0	19.75	20.65	21.37
2340.0	2370.0	18.37	18.89	20.24
2440.0	2470.0	16.92	17.15	18.23
2540.0	2570.0	17.09	17.89	18.25
2640.0	2670.0	18.94	21.20	21.44
2740.0	2770.0	18.48	19.76	20.56
2840.0	2870.0	17.50	17.90	18.12
2940.0	2970.0	18.83	18.28	19.20
3040.0	3070.0	20.26	21.32	21.77
3140.0	3170.0	19.86	22.12	21.51
3240.0	3270.0	20.01	24.03	21.52
3340.0	3370.0	20.51	24.00	22.93
3440.0	3470.0	19.27	22.63	22.60
3540.0	3570.0	18.51	20.89	21.17
3640.0	3670.0	19.17	20.86	21.61
3720.0	3750.0	17.42	18.71	20.70
3820.0	3850.0	18.43	16.39	18.40
3900.0	3930.0	20.41	16.95	17.82
4000.0	4030.0	12.52	18.74	29.64

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+9dBm (dB) @LO (dBm)		
		+10	+13	+16
140.0	170.0	-0.52	0.37	0.19
240.0	270.0	0.42	0.26	0.15
340.0	370.0	0.67	0.35	0.26
440.0	470.0	0.65	0.42	0.35
540.0	570.0	0.66	0.43	0.38
640.0	670.0	0.66	0.40	0.39
740.0	770.0	0.49	0.42	0.42
840.0	870.0	0.24	0.21	0.27
940.0	970.0	-0.08	0.31	0.32
1040.0	1070.0	-0.55	-0.16	0.13
1140.0	1170.0	-0.49	-0.27	0.14
1240.0	1270.0	0.14	0.37	0.30
1340.0	1370.0	0.23	0.23	0.21
1440.0	1470.0	0.00	0.35	0.21
1540.0	1570.0	0.21	0.20	0.15
1640.0	1670.0	0.25	0.26	0.13
1740.0	1770.0	0.14	0.21	0.13
1840.0	1870.0	0.31	0.27	0.16
1940.0	1970.0	0.20	0.20	0.16
2040.0	2070.0	0.55	0.50	0.26
2140.0	2170.0	1.05	0.66	0.41
2240.0	2270.0	1.26	0.70	0.46
2340.0	2370.0	1.21	0.80	0.59
2440.0	2470.0	0.97	0.66	0.51
2540.0	2570.0	0.79	0.60	0.48
2640.0	2670.0	1.13	0.73	0.54
2740.0	2770.0	1.07	0.63	0.49
2840.0	2870.0	0.91	0.50	0.40
2940.0	2970.0	0.70	0.33	0.26
3040.0	3070.0	0.69	0.29	0.22
3140.0	3170.0	0.69	0.24	0.15
3240.0	3270.0	0.42	0.27	0.17
3340.0	3370.0	0.40	0.31	0.18
3440.0	3470.0	0.34	0.36	0.17
3540.0	3570.0	0.45	0.43	0.20
3640.0	3670.0	0.66	0.53	0.25
3720.0	3750.0	0.94	0.70	0.31
3820.0	3850.0	0.79	0.82	0.42
3900.0	3930.0	0.33	0.68	0.40
4000.0	4030.0	-0.16	0.43	0.41

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1760.1MHz (dB) @LO (dBm) +13
1650.1	110.0	14.04
1610.1	150.0	11.36
1570.1	190.0	10.18
1530.1	230.0	9.67
1490.1	270.0	9.51
1450.1	310.0	9.42
1410.1	350.0	9.43
1370.1	390.0	9.28
1330.1	430.0	9.23
1290.1	470.0	9.18
1250.1	510.0	9.27
1210.1	550.0	9.34
1170.1	590.0	9.25
1130.1	630.0	9.36
1090.1	670.0	9.36
1050.1	710.0	9.29
1010.1	750.0	9.03
970.1	790.0	8.66
930.1	830.0	8.29
890.1	870.0	7.91
850.1	910.0	7.69
810.1	950.0	7.56
770.1	990.0	7.70
730.1	1030.0	8.08
690.1	1070.0	8.31
650.1	1110.0	8.51
610.1	1150.0	8.48
570.1	1190.0	8.12
530.1	1230.0	8.03
490.1	1270.0	7.56
450.1	1310.0	7.62
410.1	1350.0	7.39
370.1	1390.0	7.76
310.1	1450.0	7.74
270.1	1490.0	7.64
210.1	1550.0	7.17
170.1	1590.0	7.08
110.1	1650.0	7.04
70.1	1690.0	7.14
10.1	1750.0	7.29

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=489.9MHz (dB) @LO (dBm) +13
10.1	500.0	6.31
90.1	580.0	6.10
170.1	660.0	6.00
270.1	760.0	5.80
350.1	840.0	5.84
450.1	940.0	5.70
530.1	1020.0	5.82
630.1	1120.0	6.27
710.1	1200.0	6.60
810.1	1300.0	6.65
890.1	1380.0	7.14
990.1	1480.0	6.92
1070.1	1560.0	6.82
1170.1	1660.0	6.52
1250.1	1740.0	6.41
1350.1	1840.0	6.38
1430.1	1920.0	6.77
1530.1	2020.0	6.81
1610.1	2100.0	6.96
1710.1	2200.0	7.49
1790.1	2280.0	7.43
1890.1	2380.0	7.16
1970.1	2460.0	7.64
2070.1	2560.0	7.79
2150.1	2640.0	7.59
2250.1	2740.0	7.72
2330.1	2820.0	8.30
2430.1	2920.0	8.46
2510.1	3000.0	8.57
2610.1	3100.0	8.42
2690.1	3180.0	8.33
2790.1	3280.0	8.20
2870.1	3360.0	8.14
2970.1	3460.0	8.09
3050.1	3540.0	8.38
3150.1	3640.0	8.49
3230.1	3720.0	8.46
3330.1	3820.0	9.42
3410.1	3900.0	10.17
3510.1	4000.0	10.74

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=3510.1MHz (dB) @LO (dBm) +13
1730.1	1780.0	10.45
1690.1	1820.0	10.24
1650.1	1860.0	9.98
1610.1	1900.0	9.98
1570.1	1940.0	10.10
1530.1	1980.0	10.22
1490.1	2020.0	9.99
1450.1	2060.0	9.89
1410.1	2100.0	9.84
1370.1	2140.0	9.88
1330.1	2180.0	9.90
1290.1	2220.0	9.81
1250.1	2260.0	9.74
1210.1	2300.0	9.64
1170.1	2340.0	9.52
1130.1	2380.0	9.41
1090.1	2420.0	9.28
1050.1	2460.0	9.19
1010.1	2500.0	9.08
970.1	2540.0	8.92
930.1	2580.0	8.74
890.1	2620.0	8.59
850.1	2660.0	8.43
810.1	2700.0	8.32
770.1	2740.0	8.32
710.1	2800.0	8.26
670.1	2840.0	8.28
610.1	2900.0	8.25
570.1	2940.0	8.22
510.1	3000.0	8.29
470.1	3040.0	8.37
410.1	3100.0	8.52
370.1	3140.0	8.61
310.1	3200.0	8.43
270.1	3240.0	8.60
210.1	3300.0	8.41
170.1	3340.0	8.43
110.1	3400.0	8.20
70.1	3440.0	8.20
10.1	3500.0	8.11

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB) @LO (dBm)			LO-IF ISOLATION (dB) @LO (dBm)		
	+10	+13	+16	+10	+13	+16
170.0	10.60	11.63	13.57	31.92	36.20	40.28
270.0	8.64	11.01	13.40	36.54	39.62	41.35
370.0	10.17	12.66	14.97	35.85	36.79	37.37
470.0	11.52	13.83	15.95	32.01	33.04	34.18
570.0	13.58	15.71	17.69	30.38	31.51	32.61
670.0	15.73	17.75	19.49	28.54	30.03	30.99
770.0	18.04	19.83	21.47	27.53	29.26	30.22
870.0	20.15	22.07	23.52	27.21	28.61	28.95
970.0	22.07	24.58	26.82	27.18	27.78	27.47
1070.0	23.00	25.82	29.28	27.22	27.47	26.75
1170.0	22.88	26.41	31.38	26.64	26.86	26.13
1270.0	22.08	26.67	33.27	25.60	26.19	25.81
1370.0	20.70	26.01	34.77	24.22	25.03	25.03
1470.0	21.00	27.82	35.26	23.54	24.52	24.95
1570.0	26.02	34.18	31.23	23.72	25.06	26.17
1670.0	33.30	33.20	29.37	24.55	26.60	27.99
1770.0	41.76	34.20	31.27	25.64	27.93	29.03
1870.0	39.48	32.51	30.42	26.36	29.03	29.71
1970.0	36.72	33.29	32.40	25.83	28.24	29.32
2070.0	33.27	31.34	30.98	24.69	27.28	28.89
2170.0	33.90	32.37	31.62	28.54	29.80	30.18
2270.0	32.23	31.68	31.61	27.41	28.35	29.02
2370.0	29.64	30.58	31.21	24.48	26.30	27.66
2470.0	27.70	29.24	30.61	23.32	25.57	27.41
2570.0	28.15	29.68	31.00	26.06	27.15	27.96
2670.0	28.16	30.60	32.25	25.78	26.67	27.42
2770.0	27.03	29.50	31.62	24.68	25.73	26.71
2870.0	26.61	29.56	32.11	23.34	24.63	25.69
2970.0	25.61	28.75	31.89	21.95	23.21	24.31
3070.0	24.42	27.04	30.11	21.30	22.48	23.64
3170.0	25.81	28.90	32.28	20.78	21.38	22.44
3270.0	24.91	27.54	31.33	21.06	21.13	21.85
3370.0	25.47	27.21	29.41	21.76	21.22	21.48
3470.0	25.43	27.40	28.99	21.46	20.44	20.42
3570.0	24.78	25.33	26.13	22.35	21.03	21.07
3670.0	23.69	23.19	23.13	24.90	23.87	23.49
3750.0	21.04	20.27	19.99	27.81	26.38	25.05
3850.0	14.44	14.67	15.16	31.01	26.25	23.69
3930.0	11.60	12.90	14.55	33.48	25.70	22.77
4030.0	10.70	11.68	12.63	32.89	27.91	24.58

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB) @LO (dBm)		
		+10	+13	+16
140.0	170.0	31.38	32.26	33.87
240.0	270.0	29.68	31.55	32.18
340.0	370.0	30.12	31.15	32.23
440.0	470.0	29.83	30.57	31.30
540.0	570.0	32.60	33.22	32.58
640.0	670.0	35.15	34.12	32.84
740.0	770.0	35.22	32.68	31.70
840.0	870.0	40.34	40.65	38.84
940.0	970.0	40.81	45.34	36.68
1040.0	1070.0	35.71	36.44	35.28
1140.0	1170.0	31.69	32.51	31.96
1240.0	1270.0	29.30	28.60	28.71
1340.0	1370.0	29.21	26.49	25.68
1440.0	1470.0	27.86	24.61	23.73
1540.0	1570.0	27.17	23.87	22.93
1640.0	1670.0	29.65	26.16	25.14
1740.0	1770.0	32.25	29.92	28.64
1840.0	1870.0	35.11	32.47	31.08
1940.0	1970.0	37.27	34.15	32.82
2040.0	2070.0	30.23	33.29	33.31
2140.0	2170.0	28.39	28.31	28.34
2240.0	2270.0	31.09	29.91	29.41
2340.0	2370.0	38.22	35.25	34.15
2440.0	2470.0	27.69	29.12	30.12
2540.0	2570.0	23.46	24.49	25.76
2640.0	2670.0	24.05	24.59	25.08
2740.0	2770.0	23.54	24.12	24.66
2840.0	2870.0	22.34	22.36	22.67
2940.0	2970.0	24.66	24.64	25.06
3040.0	3070.0	29.30	29.91	30.39
3140.0	3170.0	31.84	40.80	42.40
3240.0	3270.0	25.89	28.25	29.85
3340.0	3370.0	25.59	29.22	31.73
3440.0	3470.0	24.48	26.50	27.26
3540.0	3570.0	23.72	24.73	25.12
3640.0	3670.0	23.27	23.99	24.67
3720.0	3750.0	24.12	24.29	24.70
3820.0	3850.0	26.30	25.69	25.19
3900.0	3930.0	27.23	28.83	28.33
4000.0	4030.0	28.05	29.08	28.93

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1) @LO (dBm)		
		+10	+13	+16
140.0	170.0	9.53	7.94	7.70
240.0	270.0	4.29	4.09	3.99
340.0	370.0	2.48	2.40	2.35
440.0	470.0	1.89	1.76	1.67
540.0	570.0	1.81	1.64	1.53
640.0	670.0	2.18	1.95	1.81
740.0	770.0	2.68	2.35	2.16
840.0	870.0	3.41	2.93	2.67
940.0	970.0	3.99	3.31	3.00
1040.0	1070.0	4.44	3.79	3.39
1140.0	1170.0	4.52	3.90	3.46
1240.0	1270.0	3.90	3.33	3.07
1340.0	1370.0	3.48	2.99	2.75
1440.0	1470.0	2.82	2.40	2.25
1540.0	1570.0	2.63	2.35	2.21
1640.0	1670.0	2.95	2.52	2.32
1740.0	1770.0	3.13	2.67	2.42
1840.0	1870.0	3.00	2.59	2.36
1940.0	1970.0	2.90	2.52	2.32
2040.0	2070.0	2.52	2.20	2.07
2140.0	2170.0	2.22	2.00	1.89
2240.0	2270.0	1.90	1.74	1.65
2340.0	2370.0	1.65	1.51	1.43
2440.0	2470.0	1.57	1.42	1.33
2540.0	2570.0	1.68	1.56	1.48
2640.0	2670.0	1.94	1.84	1.78
2740.0	2770.0	2.38	2.33	2.27
2840.0	2870.0	2.87	2.85	2.82
2940.0	2970.0	3.45	3.39	3.36
3040.0	3070.0	4.15	3.94	3.86
3140.0	3170.0	4.80	4.37	4.22
3240.0	3270.0	5.49	4.66	4.31
3340.0	3370.0	6.05	4.83	4.32
3440.0	3470.0	5.74	4.50	3.97
3540.0	3570.0	5.34	4.09	3.53
3640.0	3670.0	4.69	3.71	3.19
3720.0	3750.0	3.73	3.09	2.69
3820.0	3850.0	2.52	2.12	1.92
3900.0	3930.0	2.16	1.86	1.78
4000.0	4030.0	1.21	1.05	1.05

LO (MHz)	LO VSWR (:1) @LO (dBm)		
	+10	+13	+16
170.0	10.89	7.31	5.20
270.0	3.58	2.76	2.80
370.0	1.97	1.89	2.25
470.0	1.40	1.41	1.89
570.0	1.41	1.13	1.63
670.0	1.74	1.08	1.42
770.0	2.18	1.28	1.25
870.0	2.58	1.45	1.09
970.0	2.96	1.64	1.06
1070.0	3.11	1.72	1.16
1170.0	3.19	1.85	1.37
1270.0	3.34	1.97	1.50
1370.0	3.06	1.91	1.58
1470.0	3.05	2.08	1.79
1570.0	2.99	2.03	1.83
1670.0	2.80	1.91	1.81
1770.0	2.42	1.76	1.81
1870.0	2.14	1.65	1.82
1970.0	1.98	1.70	1.91
2070.0	1.95	1.70	1.93
2170.0	1.61	1.47	1.85
2270.0	1.45	1.40	1.84
2370.0	1.25	1.32	1.83
2470.0	1.14	1.32	1.85
2570.0	1.17	1.36	1.86
2670.0	1.27	1.32	1.80
2770.0	1.53	1.41	1.79
2870.0	1.92	1.57	1.76
2970.0	2.40	1.77	1.73
3070.0	2.98	2.00	1.72
3170.0	3.69	2.26	1.69
3270.0	4.43	2.54	1.71
3370.0	5.14	2.79	1.79
3470.0	5.65	3.03	1.98
3570.0	5.51	3.07	2.19
3670.0	4.66	2.95	2.44
3750.0	3.91	2.92	2.67
3850.0	3.44	2.92	2.70
3930.0	2.55	2.17	2.07
4030.0	1.63	1.72	1.96

IF (OUT) (MHz)	IF VSWR @LO=3500MHz (:1) @LO (dBm)		
	+10	+13	+16
10.0	1.16	1.36	1.64
70.0	1.21	1.37	1.64
130.0	1.26	1.40	1.66
190.0	1.36	1.43	1.65
250.0	1.47	1.50	1.68
310.0	1.54	1.55	1.69
350.0	1.62	1.60	1.71
410.0	1.74	1.71	1.79
450.0	1.85	1.79	1.83
510.0	1.99	1.89	1.88
550.0	2.18	1.97	1.88
610.0	2.22	1.89	1.75
650.0	2.13	1.75	1.60
710.0	1.89	1.51	1.37
750.0	1.73	1.33	1.20
810.0	1.63	1.23	1.10
850.0	1.55	1.20	1.18
910.0	1.57	1.30	1.35
950.0	1.55	1.38	1.48
1010.0	1.57	1.50	1.64
1050.0	1.59	1.63	1.81
1110.0	1.66	1.74	1.91
1150.0	1.75	1.90	2.06
1210.0	1.88	2.04	2.14
1250.0	1.98	2.12	2.18
1310.0	2.06	2.11	2.11
1350.0	2.11	2.13	2.12
1410.0	2.01	1.94	1.90
1450.0	1.94	1.88	1.86
1510.0	1.70	1.69	1.73
1550.0	1.59	1.63	1.71
1610.0	1.46	1.63	1.79
1650.0	1.47	1.72	1.90
1710.0	1.54	1.90	2.13
1750.0	1.61	1.99	2.31
1810.0	1.74	2.30	2.65
1850.0	1.81	2.43	2.79
1910.0	1.93	2.65	3.06
1950.0	1.97	2.71	3.14
2010.0	2.00	2.78	3.22

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Harmonics Tables

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	1	22	7	27	18	30	36	41	41	50
1	-	50	+0	36	15	43	32	36	37	48	50	50
2	71	57	62	53	56	59	49	62	57	70	73	69
3	>90	>77	69	69	64	>77	71	74	70	70	72	>77
4	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
5	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
6	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
7	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
8	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
9	89	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
10	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

Test conditions: RF IN: 2000 MHz; -6.00 dBm.
LO IN: 2030 MHz; +13.00 dBm
IF OUT: 30 MHz; -13 dBm

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	11	31	18	37	30	44	49	60	51	71
1	-	43	+0	34	16	43	34	38	39	52	56	53
2	51	49	50	44	45	51	39	55	49	55	65	63
3	85	52	50	46	48	62	51	58	48	52	60	65
4	>90	67	66	71	64	67	63	66	69	76	64	72
5	>90	66	65	64	66	67	60	75	65	82	81	75
6	>90	85	73	>87	79	78	74	71	78	72	78	82
7	>90	>87	86	82	>87	82	85	85	84	85	>87	>87
8	>90	>87	>87	>87	85	>87	>87	>87	85	82	>87	87
9	>90	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
10	>90	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER


Test conditions: RF IN: 2000 MHz; 4.00 dBm.
LO IN: 2030 MHz; +13.00 dBm
IF OUT: 30 MHz; -3.07 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.


Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Curves


Conversion Loss @ IF=30MHz

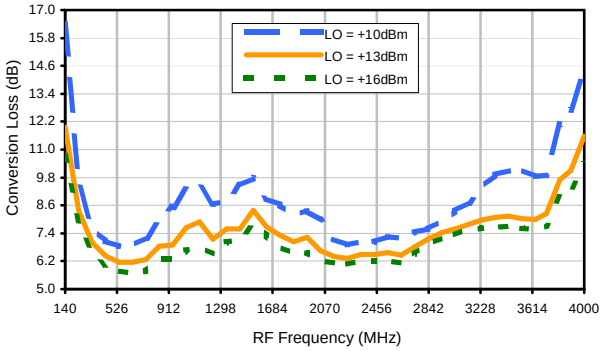


Conversion Loss vs. IF @ RF=1760.1MHz

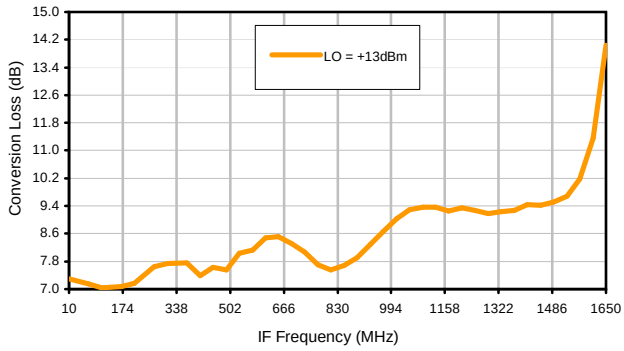


Conversion Loss vs. IF @ RF=489.9MHz

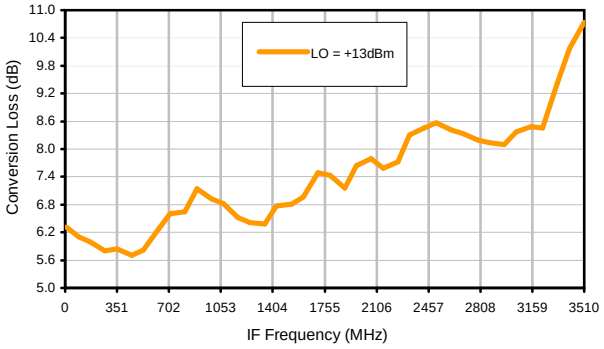


Conversion Loss vs. IF @ RF=3510.1MHz

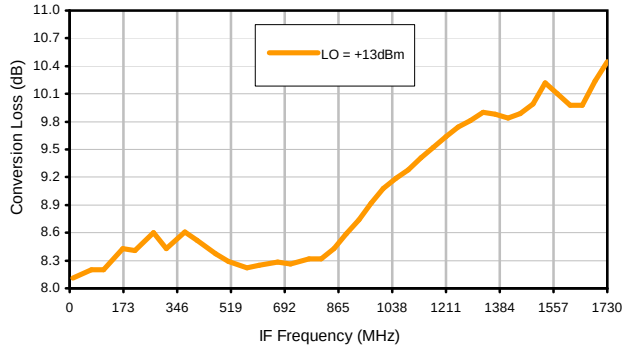

IP3 Input

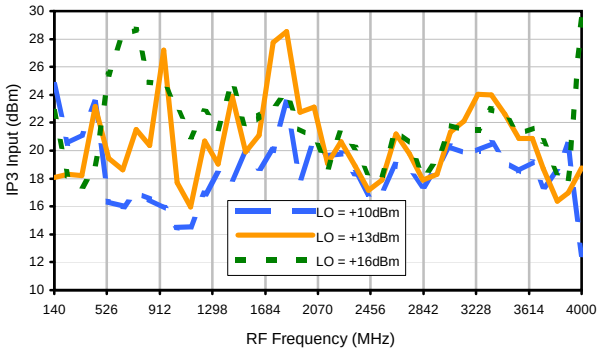


Compression @ RF IN=+9dBm

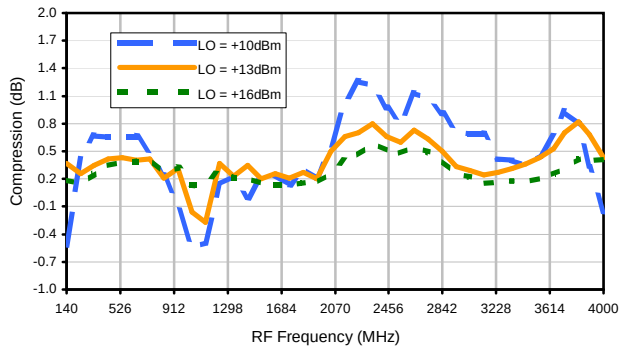


Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Curves


LO-RF Isolation

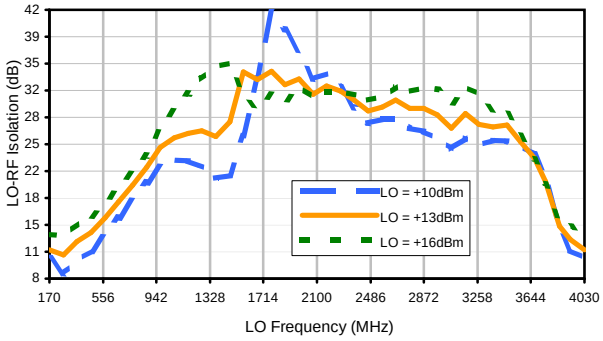


LO-IF Isolation

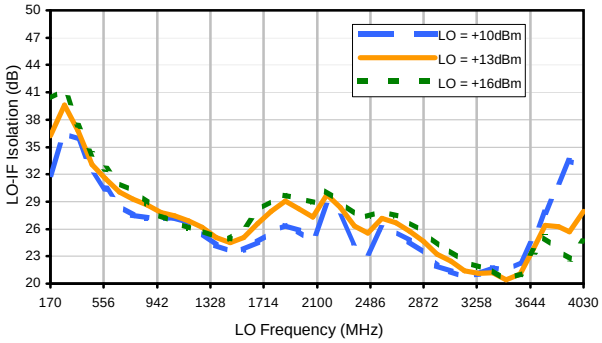


RF-IF Isolation

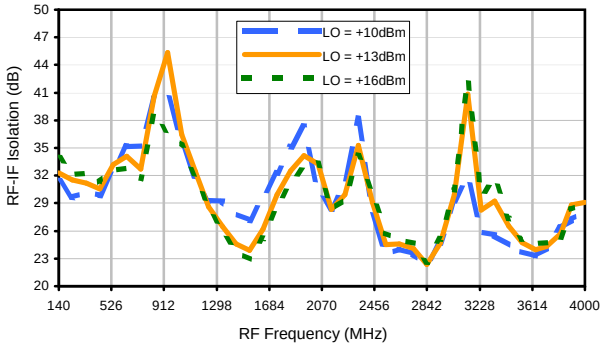


RF VSWR

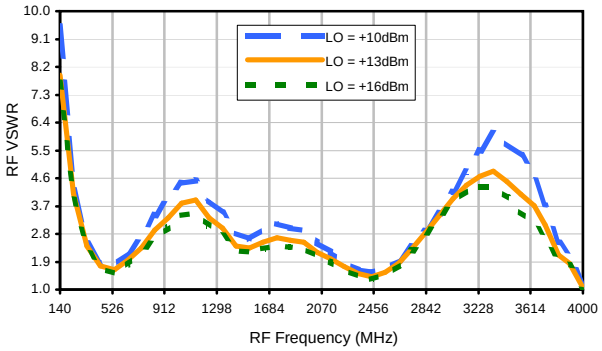

LO VSWR

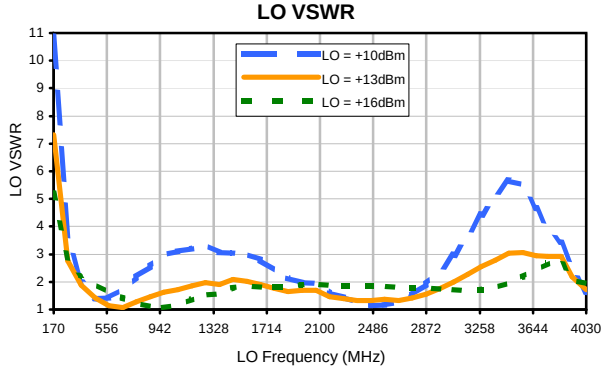

IF VSWR

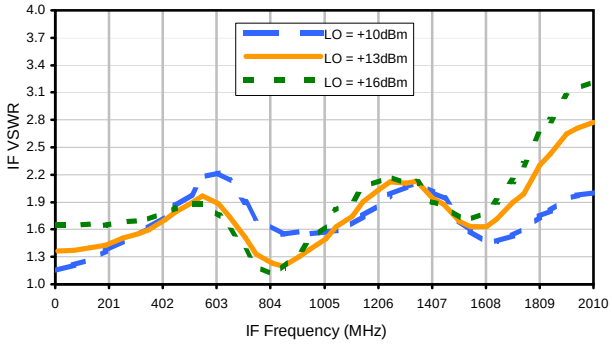

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Harmonics Tables

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	1	22	7	27	18	30	36	41	41	50
1	-	50	+0	36	15	43	32	36	37	48	50	50
2	71	57	62	53	56	59	49	62	57	70	73	69
3	>90	>77	69	69	64	>77	71	74	70	70	72	>77
4	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
5	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
6	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
7	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
8	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
9	89	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
10	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

Test conditions: **RF IN: 2000 MHz; -6.00 dBm.**
LO IN: 2030 MHz; +13.00 dBm
IF OUT: 30 MHz; -13 dBm

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	11	31	18	37	30	44	49	60	51	71
1	-	43	+0	34	16	43	34	38	39	52	56	53
2	51	49	50	44	45	51	39	55	49	55	65	63
3	85	52	50	46	48	62	51	58	48	52	60	65
4	>90	67	66	71	64	67	63	66	69	76	64	72
5	>90	66	65	64	66	67	60	75	65	82	81	75
6	>90	85	73	>87	79	78	74	71	78	72	78	82
7	>90	>87	86	82	>87	82	85	85	84	85	>87	>87
8	>90	>87	>87	>87	85	>87	>87	>87	85	82	>87	87
9	>90	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
10	>90	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: **RF IN: 2000 MHz; 4.00 dBm.**
LO IN: 2030 MHz; +13.00 dBm
IF OUT: 30 MHz; -3.07 dBm


Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com


Case Style DZ

DZ883

Outline Dimensions

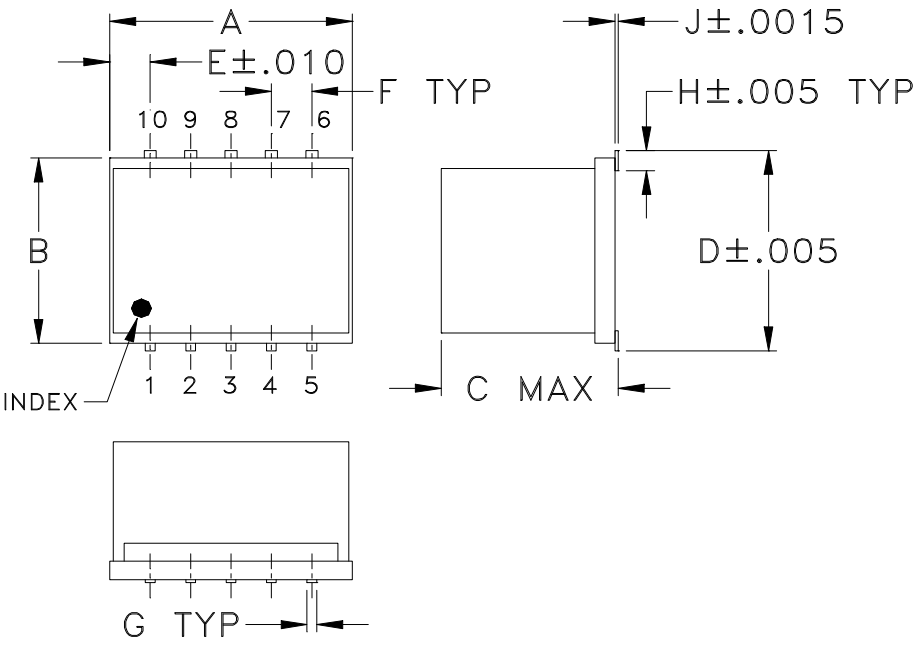

PCB Land Pattern

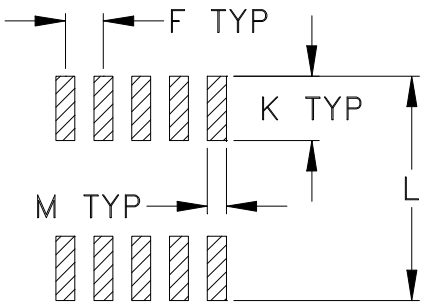

Suggested Layout,
Tolerance to be within ±.002

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	WT. GRAMS
DZ883	.30 (7.62)	.250 (6.35)	.190 (4.83)	.266 (6.76)	.050 (1.27)	.050 (1.27)	.012 (0.30)	.029 (0.74)	.004 (0.10)	.085 (2.16)	.296 (7.52)	.030 (0.76)	0.5

Dimensions are in inches (mm). Tolerances: 2Pl. ± .01; 3Pl. ± .005

Notes:


1. Case material: Ceramic.
2. Termination finish:
   For RoHS Case Styles: Tin plate. All models, (+) suffix.
   For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.

Mini-Circuits®
INTERNET http://www.minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

This document and its contents are the property of Mini-Circuits.

Tape & Reel Packaging TR-F34

DEVICE ORIENTATION IN T&R

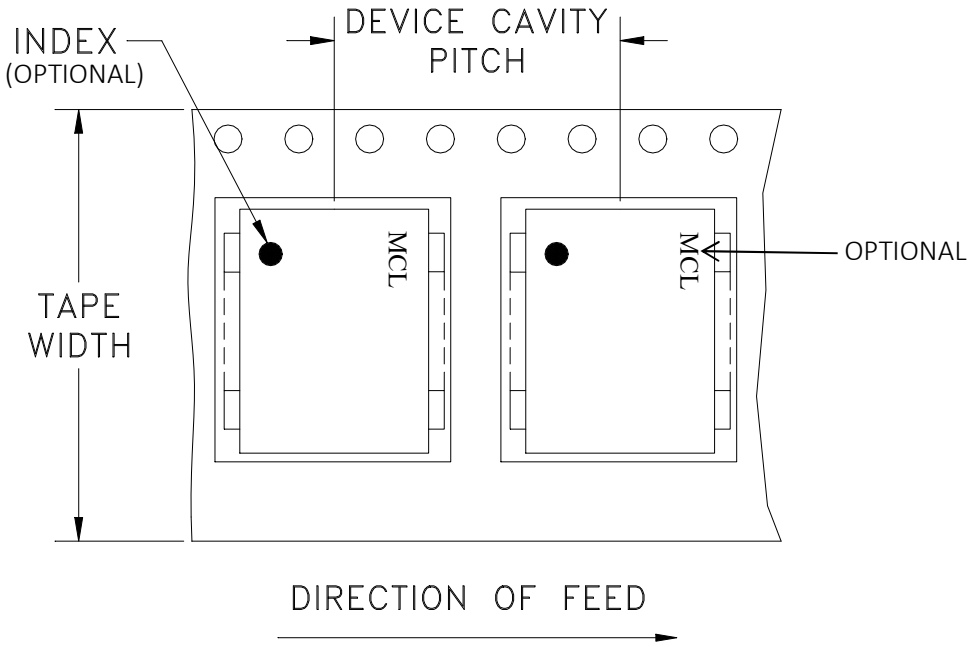

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note	
16	12	7	Small quantity standard (see note)	20
				50
				100
				200
		13	Standard	500
				1000

Note: Availability of small reel quantity varies by model.
Refer to pricing and availability on individual model dashboard.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf


Mini-Circuits®
INTERNET http://www.minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

This document and its contents are the property of Mini-Circuits.

THIRD ANGLE PROJECTION

REVISIONS					
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
A	M81781	UPDATED PCB LAYOUT	06/07/02	GF	DJ
B	M82377	UPDATED DRAWING	07/31/02	AV	WL
C	M102713	ADDED NOTE 2 & "...WITH SMOBC"	01/17/06	MMG	IL
D	M135488	ADDED DZ1650, CHANGED PIN CONN.	02/02/12	GF	DJ

SUGGESTED MOUNTING CONFIGURATION FOR DZ883, DZ885 & DZ1650 CASE STYLES, "10MX01" PIN CONNECTION

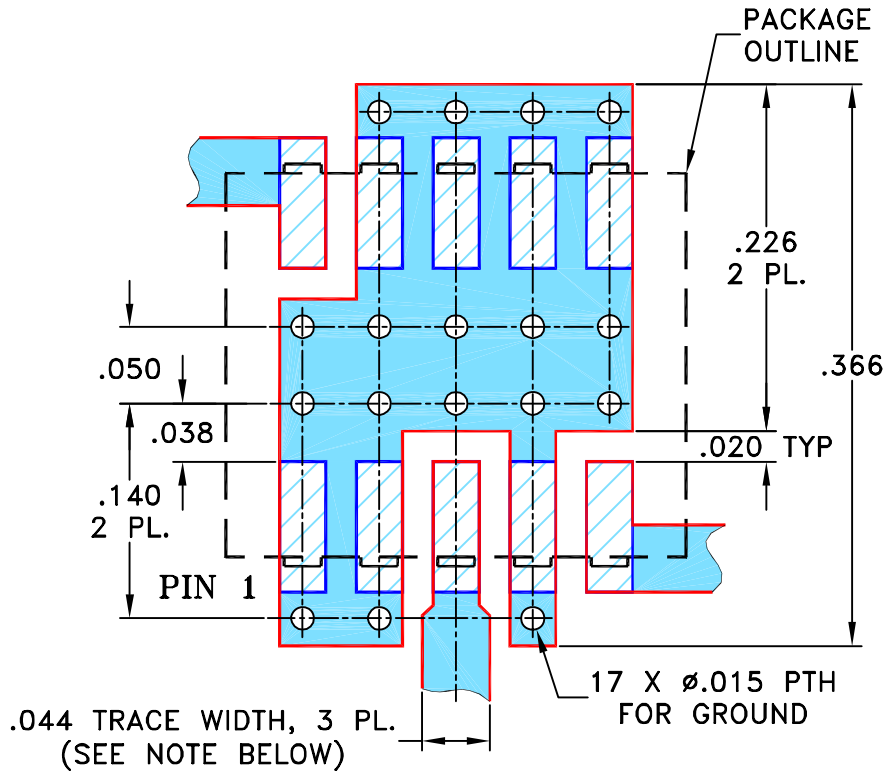

NOTES:
1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE
DIMENSIONS ARE IN INCHES	DRAWN	AV	05/08/02
TOLERANCES ON:	CHECKED	DB	05/16/02
2 PL DECIMALS ±	APPROVED	WL	05/16/02
3 PL DECIMALS ± .005			
ANGLES ±			
FRACTIONS ±			

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95


Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235

PL, 10MX01, DZ883/885/1650, TB-144


SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-045	D

FILE:	SCALE:	SHEET:
98PL045	8:1	1 OF 1

Evaluation Board and Circuit

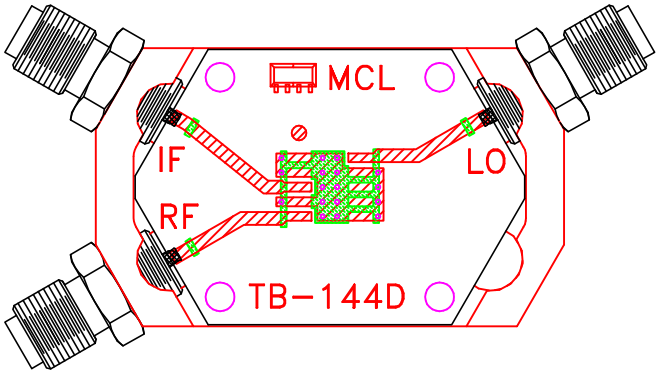

TB-144

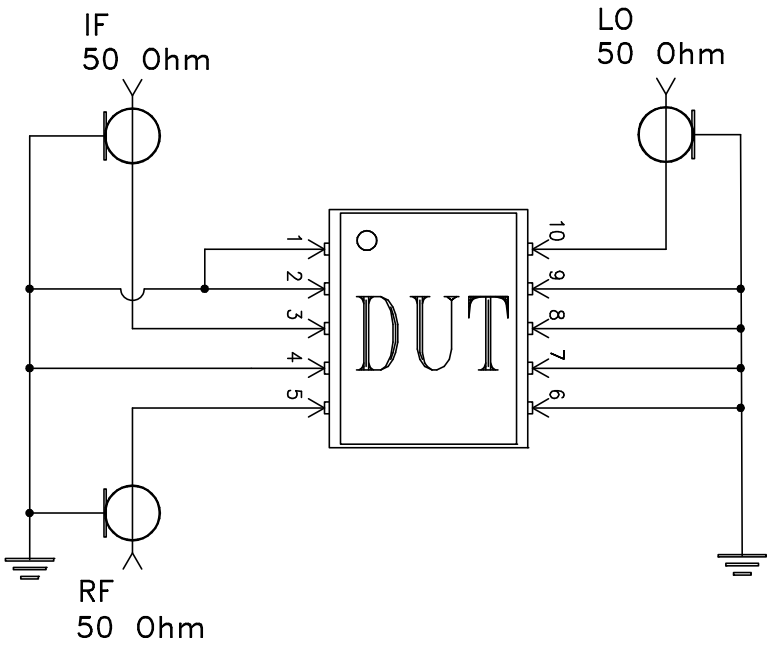

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers RO4350 or equivalent, Dielectric Constant=3.5, Thickness=.020 inch.

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS.

Mini-Circuits

Environmental Specifications ENV10

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Autoclave	15 psig, 100% RH, 121°C, 96 hours	JESD22-A102-C, Condition C
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutectic Process: 225°C peak Pb-Free Process: 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2; Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215

This document and its contents are the property of Mini-Circuits.