

X5 Frequency Multiplier

RMK-5-13+

50Ω Output 750 to 1000 MHz

The Big Deal

- Broadband, 750 to 1000 MHz output
- Good harmonic suppression:
F4, 63 dBc; F6, 68 dBc
- Small size, 0.25 x 0.31 x 0.16"



CASE STYLE: TT1224

Product Overview

i-Circuits' RMK-5-13+ frequency multiplier provides a multiplication factor of 5, converting input frequencies from 150 to 200 MHz into output frequencies from 750 to 1000 MHz, supporting applications including synthesizers, local oscillators, satellite up and down converters and more. The unit supports signal input power of +17 dBm with 21.2 dB conversion loss and very good harmonic suppression. The multiplier comes housed in a miniature surface-mount package (0.25 x 0.31 x 0.16") ideal for dense circuit board layouts.

Key Features

Feature	Advantages
Low conversion loss, 21.2 dB	With a low conversion loss, the unit produces higher output power, reducing the need for amplification.
Very good harmonic suppression <ul style="list-style-type: none">• F4, 63 dBc• F6, 68 dBc	Reduces spurious signals and the need for additional filtering.
Low cost	Provides an easy, cost-effective solution for generating high-frequency signals from a lower frequency signal source.
Small size	Measuring only 0.25 x 0.31 x 0.16", the RMK-5-13+ saves space in crowded PCB layouts.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



X5 Frequency Multiplier

RMK-5-13+

50Ω Output 750 to 1000 MHz

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Input Power	21 dBm

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

INPUT	1
OUTPUT	4
GROUND	2,3,5,6


Outline Drawing

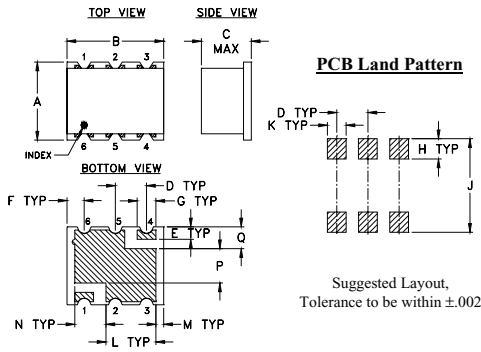

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
.25	.31	.16	.100	.040	.055	.060	.065
6.35	7.87	4.06	2.54	1.02	1.40	1.52	1.65
J	K	L	M	N	P	Q	wt.
.300	.060	.160	.025	.100	.110	.070	grams
7.62	1.52	4.06	0.64	2.54	2.79	1.78	0.16

Demo Board MCL P/N: TB-393 Suggested PCB Layout (PL-258)

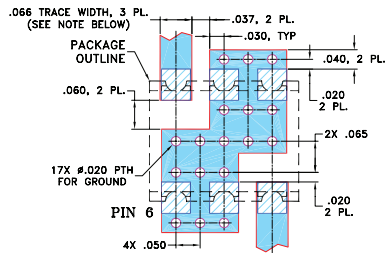

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

Features

- low conversion loss, 21.2 dB typ.
- excellent adjacent harmonic rejection, F4, 63 dBc typ., F6, 68 dBc typ
- aqueous washable

Applications

- synthesizers
- local oscillators
- satellite up and down converters



Generic photo used for illustration purposes only
CASE STYLE: TT1224

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Reel Size	Devices/Reel
7"	10, 20, 50, 100, 200
13"	500

Electrical Specifications at 25°C

Parameter	Min.	Typ.	Max.	Unit
Multiplier Factor		5		
Frequency Range, Input (F1)	150	—	200	MHz
Frequency Range, Output (F3)	750	—	1000	MHz
Input Power	—	17.0	—	dBm
Conversion Loss	—	21.2	24.5	dB
Harmonic Output*				dBc
	F1	-3	2.0	
	F2	40	65	
	F3	-10	5	
	F4	40	63	
	F6	40	68	
	F7	-1	4.0	








* Harmonics of input frequency below the power level of F5

Typical Performance Data

Frequency	Conv. Loss (dB)	Harmonic Rejection Below F5, (dBc)						
		Input (MHz)	Output (MHz)	F5	F1	F2	F3	F4
150.00	750.00	21.06	-4.59	-74.17	1.60	-65.07	-77.10	-5.27
160.00	800.00	21.21	-3.35	-74.39	2.49	-64.97	-85.69	-5.71
170.00	850.00	21.64	-1.94	-75.77	3.32	-63.82	-74.36	-6.64
180.00	900.00	21.27	-1.26	-74.11	3.89	-64.03	-76.02	-6.50
190.00	950.00	21.35	-0.22	-71.91	4.45	-64.16	-72.50	-6.69
200.00	1000.00	21.98	1.20	-69.72	5.23	-65.48	-67.62	-7.51



RMK-5-13+

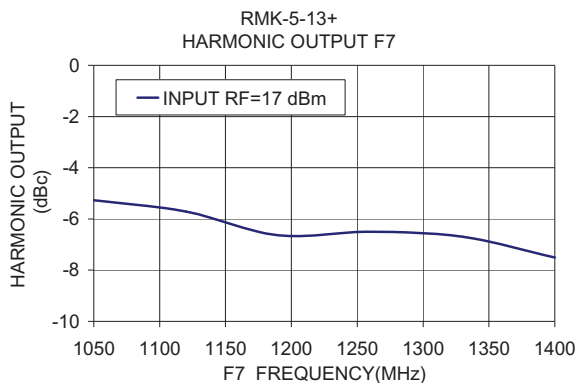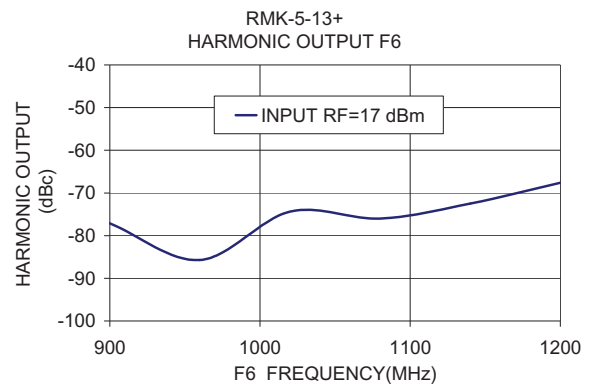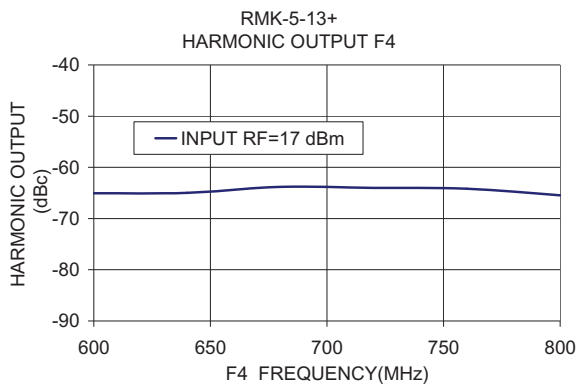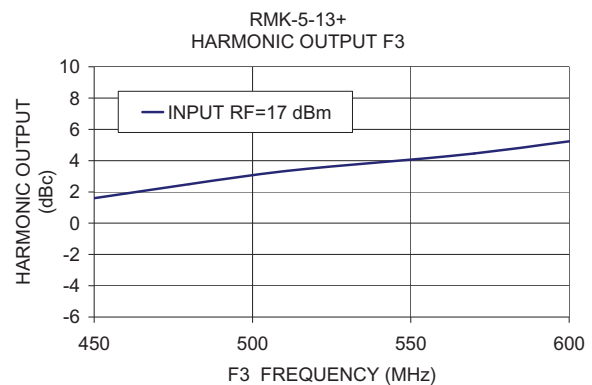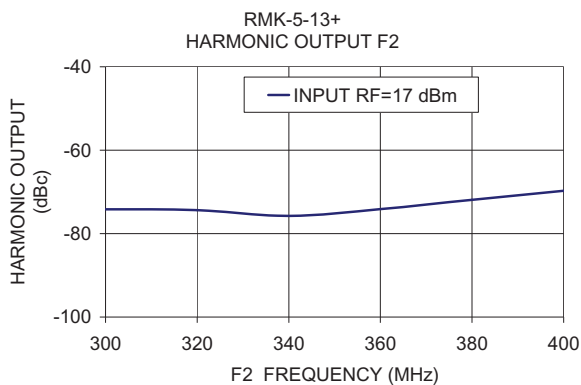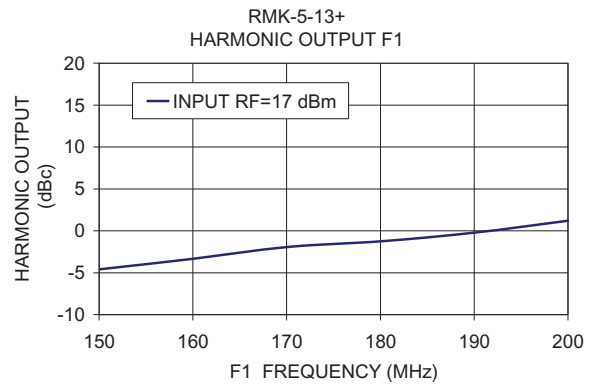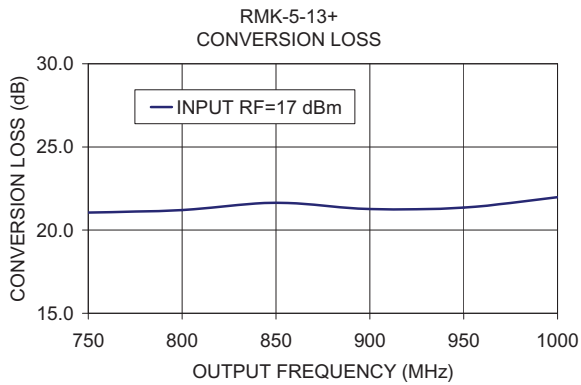

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Frequency Multiplier (X5)

RMK-5-13+

Typical Performance Data

FREQUENCY (MHz)							CONVERSION LOSS (dB)	RF IN = +17 dBm						
X1 OUTPUT	X2 OUTPUT	X3 OUTPUT	X4 OUTPUT	X5 OUTPUT	X6 OUTPUT	X7 OUTPUT		X5 OUTPUT	X1 OUTPUT	X2 OUTPUT	X3 OUTPUT	X4 OUTPUT	X6 OUTPUT	X7 OUTPUT
130	260	390	520	650	780	910	21.95	6.26	79.83	-0.24	64.11	67.24	4.59	
140	280	420	560	700	840	980	22.06	4.91	73.97	-1.09	64.09	74.11	5.39	
150	300	450	600	750	900	1050	21.06	4.59	74.17	-1.60	65.07	77.10	5.27	
160	320	480	640	800	960	1120	21.21	3.35	74.39	-2.49	64.97	85.69	5.71	
170	340	510	680	850	1020	1190	21.64	1.94	75.77	-3.32	63.82	74.36	6.64	
180	360	540	720	900	1080	1260	21.27	1.26	74.11	-3.89	64.03	76.02	6.50	
190	380	570	760	950	1140	1330	21.35	0.22	71.91	-4.45	64.16	72.50	6.69	
200	400	600	800	1000	1200	1400	21.98	-1.20	69.72	-5.23	65.48	67.62	7.51	
210	420	630	840	1050	1260	1470	22.10	-2.13	68.35	-5.81	64.91	65.38	7.67	
220	440	660	880	1100	1320	1540	22.11	-2.95	66.35	-6.17	65.04	64.84	7.56	

* Harmonic Output below power level of X5 Output.










P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
 The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com




IF/RF MICROWAVE COMPONENTS

REV. OR
 RMK-5-13+
 1/29/2015
 Page 1 of 1


Typical Performance Curves

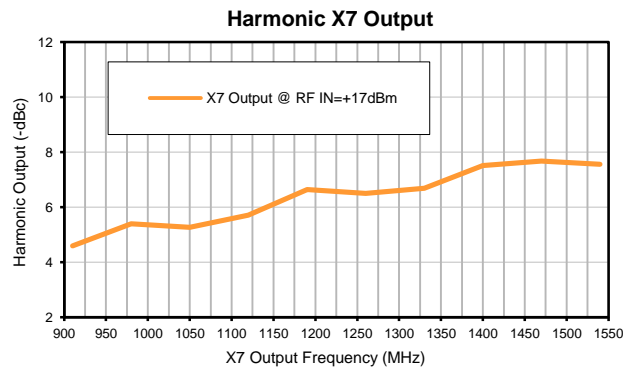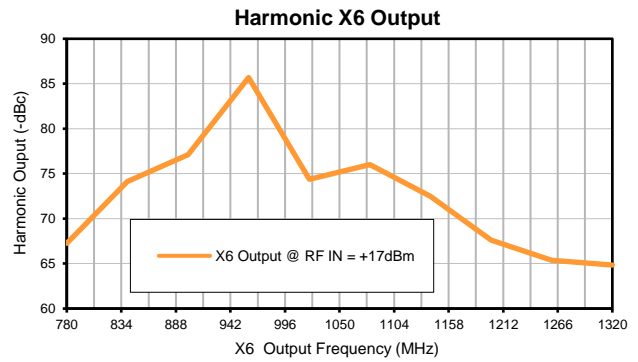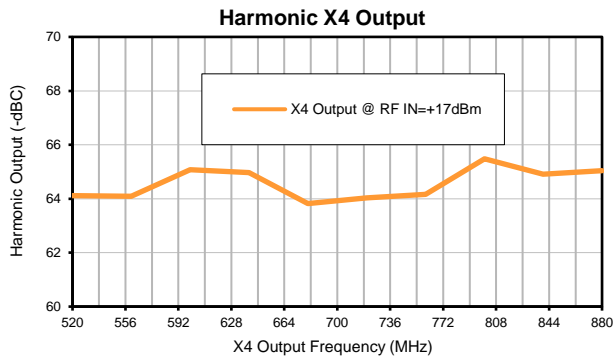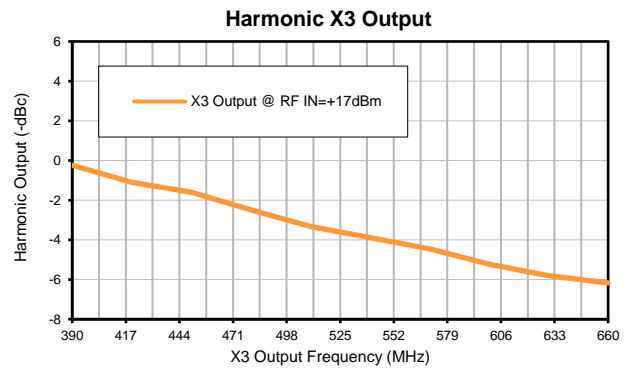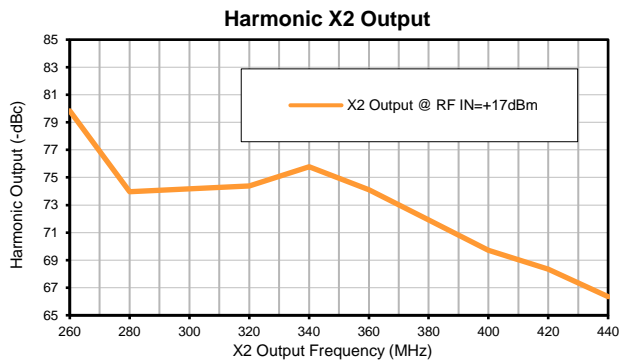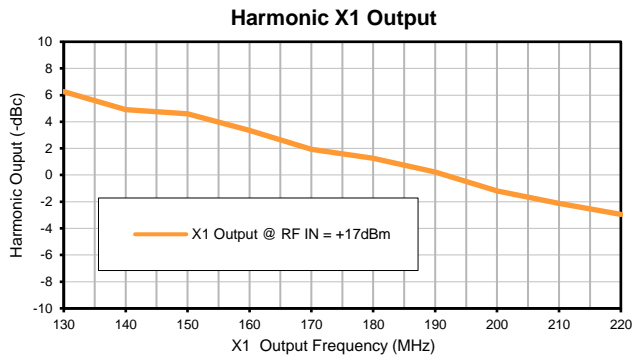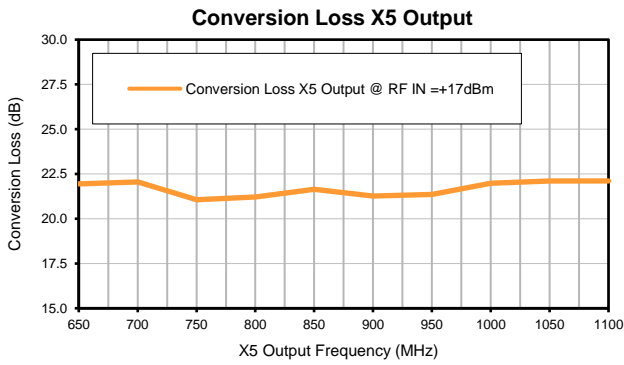

Outline Dimensions

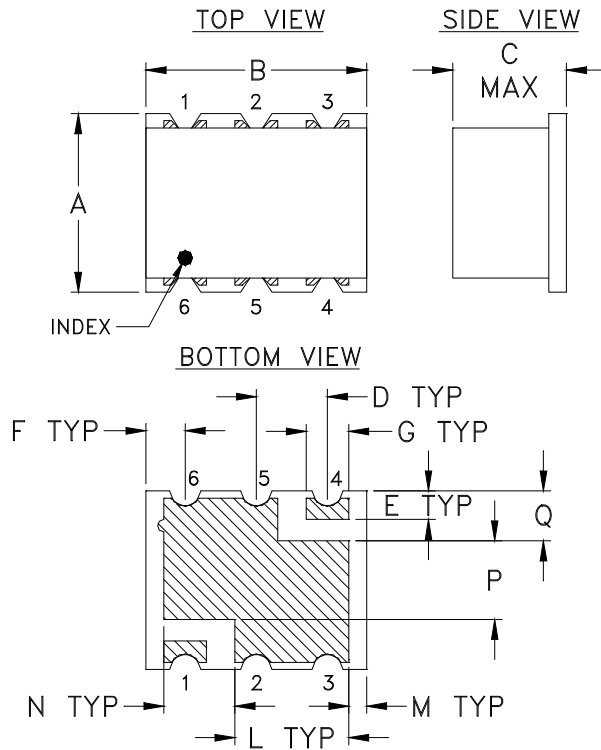

PCB Land Pattern



Suggested Layout,
Tolerance to be within $\pm .002$

CASE #	A	B	C	D	E	F	G	H	J	K	L
TT1224	.25 (6.35)	.31 (7.87)	.16 (4.06)	.100 (2.54)	.040 (1.02)	.055 (1.40)	.060 (1.52)	.065 (1.65)	.300 (7.62)	.060 (1.52)	.160 (4.06)

CASE #	M	N	P	Q	WT. GRAM
TT1224	.025 (.64)	.100 (2.54)	.110 (2.79)	.070 (1.78)	.16

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

1. Case material: Plastic.
2. Termination: 2-10 μ inch (.05-.25 microns) Gold over 100-300 μ inch (2.54-7.62 microns) Nickel plate




P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

Tape & Reel Packaging TR-F2

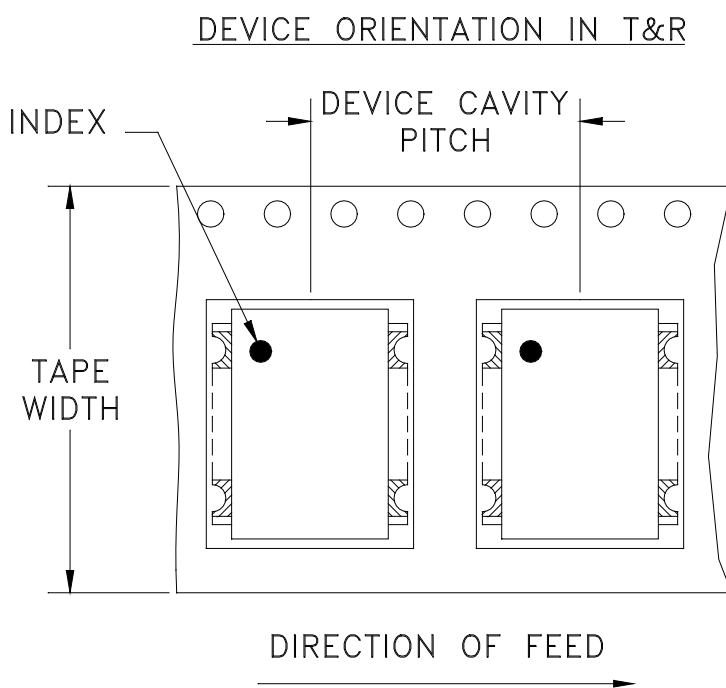

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel See note
16	12	7	10
			20
			50
			100
			200
		13	500
			1000

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

THIRD ANGLE PROJECTION




REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M108897	NEW RELEASE	01/04/07	AV	DJ

SUGGESTED MOUNTING CONFIGURATION
FOR TT1224 CASE STYLE "rv" PIN CONNECTION

.066 TRACE WIDTH, 3 PL.
(SEE NOTE BELOW)

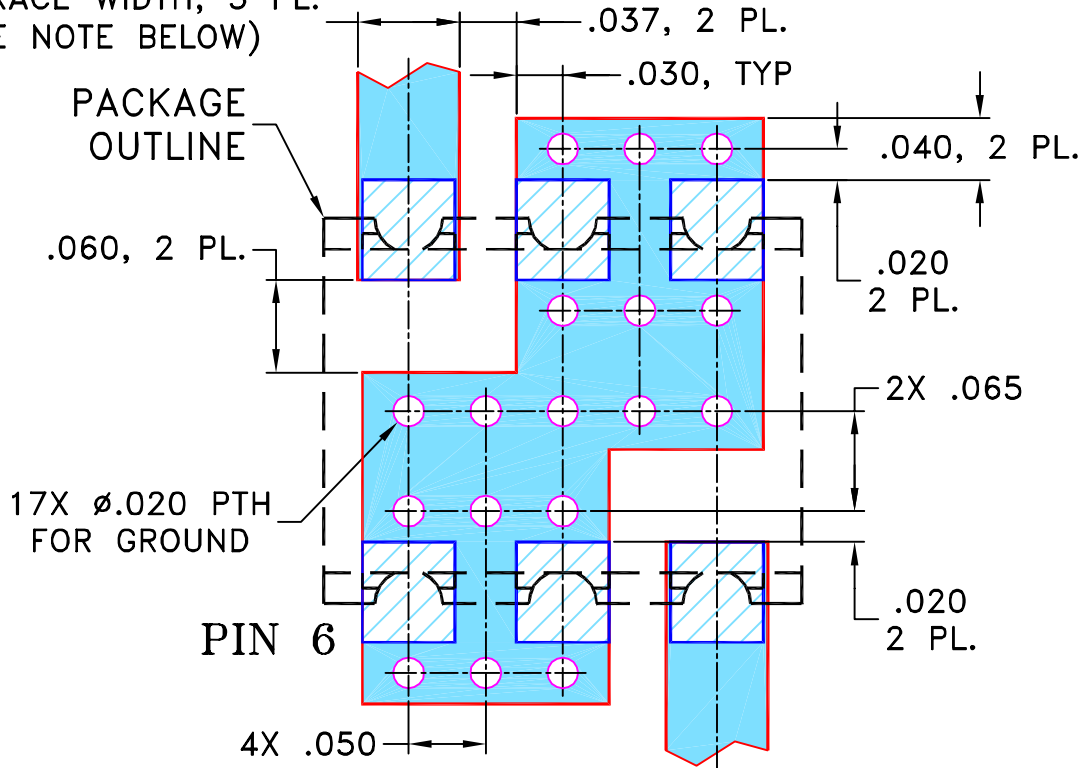

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC
(SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

DRAWN

AV

12/14/06

TOLERANCES ON:

CHECKED

IL

01/04/07

2 PL DECIMALS ± .005


APPROVED

DJ

01/04/07

ANGLES ±

FRACTIONS ±



THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, rv, TT1224, RMK-3-662+, TB-393

SIZE
A

CODE IDENT
15542

DRAWING NO:
98-PL-258


REV:
OR

FILE: 98PL258


SCALE: 8:1

SHEET: 1 OF 1

Evaluation Board and Circuit

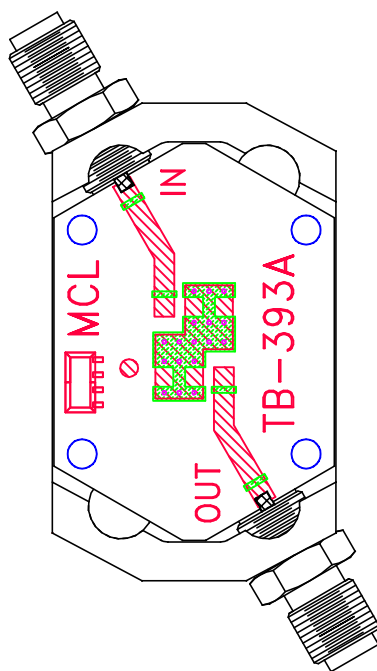


TB-393

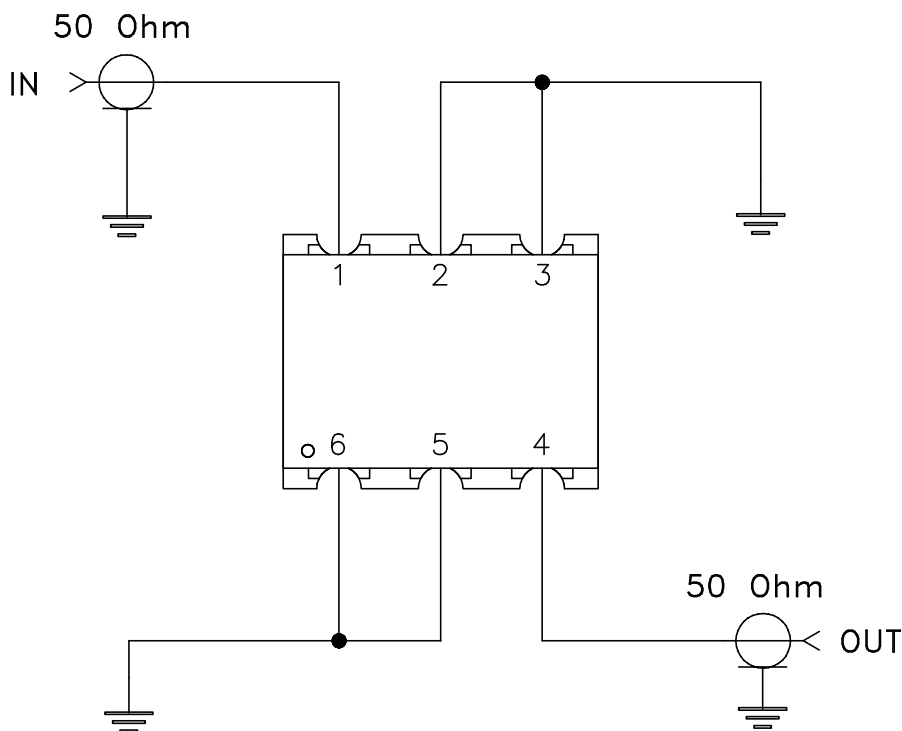

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent, Dielectric Constant=3.5, Thickness=.030 inch.

 Mini-Circuits®

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215