

Broad Band Voltage Variable Attenuator

RVA-2500+

50Ω 10 to 2500 MHz

Maximum Ratings


| | |
|--------------------------------------|---------------|
| Operating Temperature | -55°C to 85°C |
| Storage Temperature | -55°C to 85°C |
| Absolute Max. Supply Voltage(V+) | 12V |
| Absolute Max. Control Voltage(Vctrl) | 20V |
| Absolute Max. RF Input Level | +20 dBm |

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

| | |
|-----------|------------------------------|
| RF IN | 2 |
| RF OUT | 10 |
| V CONTROL | 6 |
| V+ | 14 |
| GROUND | 1,3,4,5,7,8,9,11,12,13,15,16 |


Outline Drawing

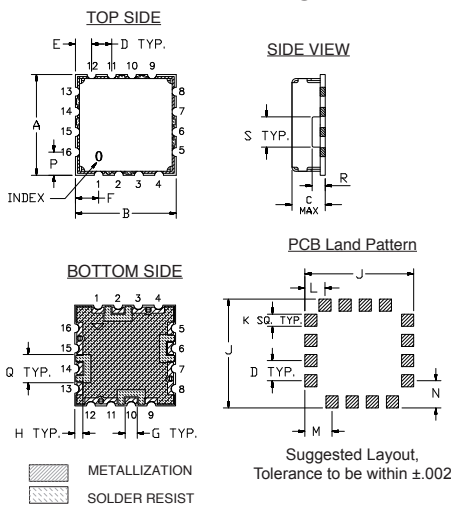

Outline Dimensions (inch/mm)

| A | B | C | D | E | F | G | H | J |
|-------|-------|------|------|------|------|------|------|-------|
| .500 | .500 | .195 | .100 | .080 | .115 | .060 | .040 | .540 |
| 12.70 | 12.70 | 4.95 | 2.54 | 2.03 | 2.92 | 1.52 | 1.02 | 13.72 |
| K | L | M | N | P | Q | R | S | wt. |
| .060 | .100 | .135 | .135 | .115 | .140 | .070 | .150 | grams |
| 1.52 | 2.54 | 3.43 | 3.43 | 2.92 | 3.56 | 1.78 | 3.81 | 1.0 |

Demo Board MCL P/N: TB-163 Suggested PCB Layout (PL-040)

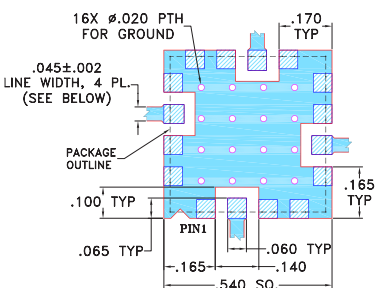

- NOTE:
- TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS 0.025" ± 0.0025"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- Broadband, 10-2500 MHz
- IP3, +43 dBm typ.
- 40 dB attenuation @ 1500 MHz
- Good VSWR at IN/OUT ports over attenuation range
- Minimal phase deviation over attenuation range
- No external bias and RF matching network required
- Shielded case



CASE STYLE: DV874

Applications

- Power level control
- Feed forward amplifiers

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Electrical Specifications (T_{AMB} = 25°C)

| FREQ. (MHz) | MIN. INSERTION LOSS, dB (+15V) | | MAX. ATTENUATION dB (0V) | | INPUT POWER (dBm) | CONTROL Voltage Current (V) (mA) | | IP3 (dBm) | RETURN LOSS (dB) | POWER SUPPLY Voltage Current (V) (mA) | |
|-------------|--------------------------------|------|--------------------------|------|-------------------|----------------------------------|------|-----------|------------------|---------------------------------------|------|
| | Min. | Max. | Typ. | Max. | | Min. | Max. | | | Typ. | Typ. |
| 10 - 500 | 3.0 | 4.6 | 55 | 41 | +20 | 0 - 17 | 30 | 43 | 20 | +3 to +5 | 5 |
| 500 - 1500 | 3.3 | 5.0 | 40 | 30 | +20 | 0 - 17 | 30 | 43 | 20 | +3 to +5 | 5 |
| 1500 - 2500 | 4.0 | 6.2 | 37 | 25 | +20 | 0 - 17 | 30 | 44 | 20 | +3 to +5 | 5 |


Notes:

- Rise/Fall time: 14μSec / 25μSec Typ.
- Switching Time, turn on/off: 14μSec / 25μSec Typ.
- Improved R.Loss in/out performance can be achieved at certain frequencies by choosing a V+ between +3V to +5V

Equivalent Schematic

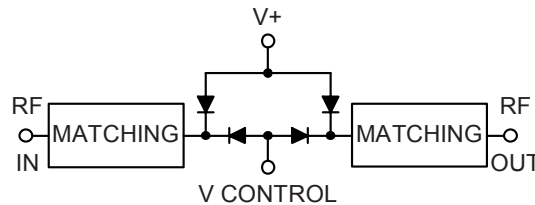

RVA-2500+ TYPICAL ATTENUATION AT 1000MHz

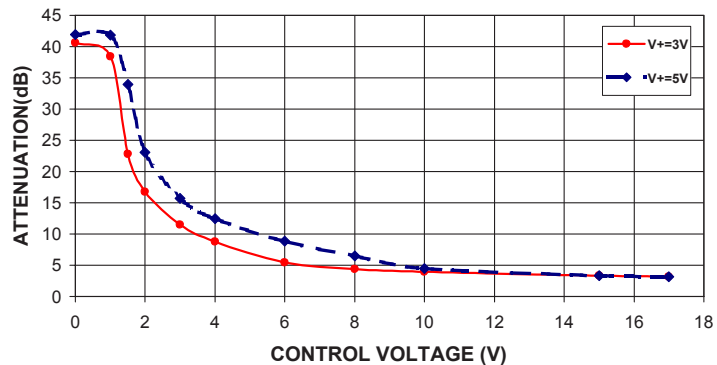


Notes


- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




RVA-2500+
ATTENUATION Vs. FREQUENCY
OVER CONTROL VOLTAGES @ V+=3V

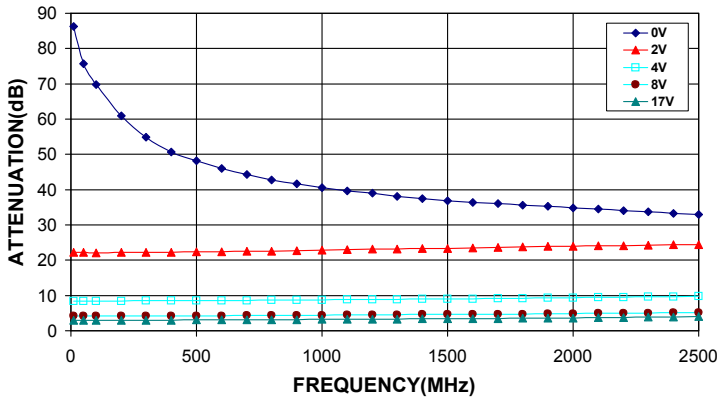


RVA-2500+
ATTENUATION Vs. FREQUENCY
OVER CONTROL VOLTAGES @ V+=5V

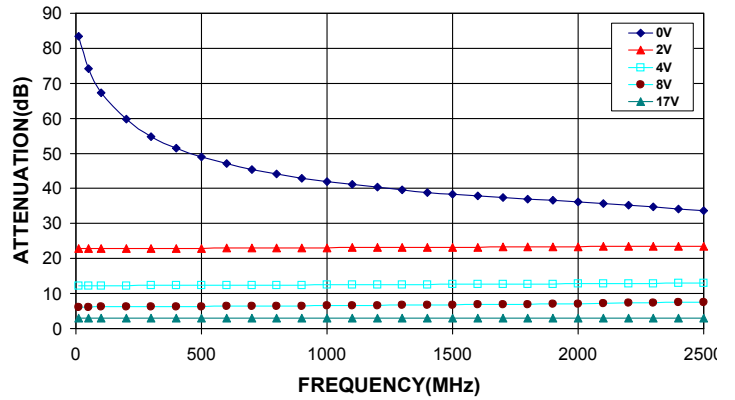


RVA-2500+
ATTENUATION Vs. INPUT POWER
OVER CONTROL VOLTAGES AT 1000MHz @ V+=3V

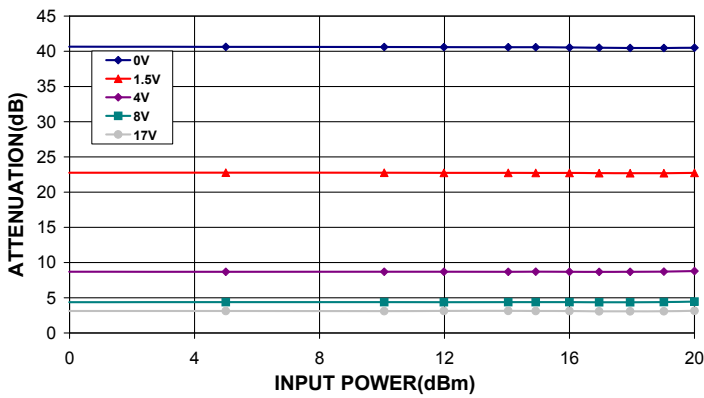


RVA-2500+
ATTENUATION Vs. INPUT POWER
OVER CONTROL VOLTAGES AT 1000MHz @ V+=5V

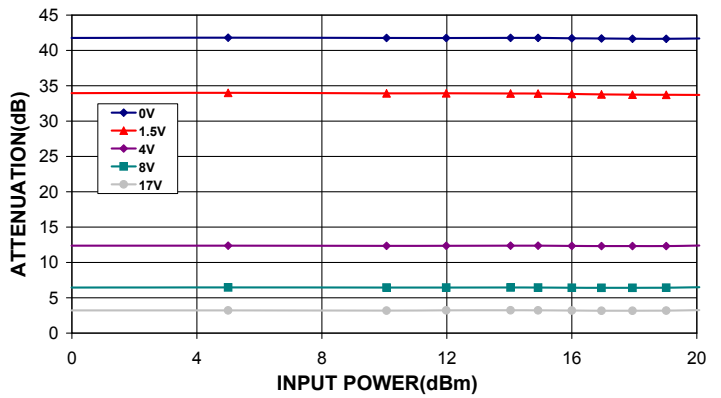

RVA-2500+
INPUT RETURN LOSS Vs. FREQUENCY
Vs. CONTROL VOLTAGE @ V+=3V

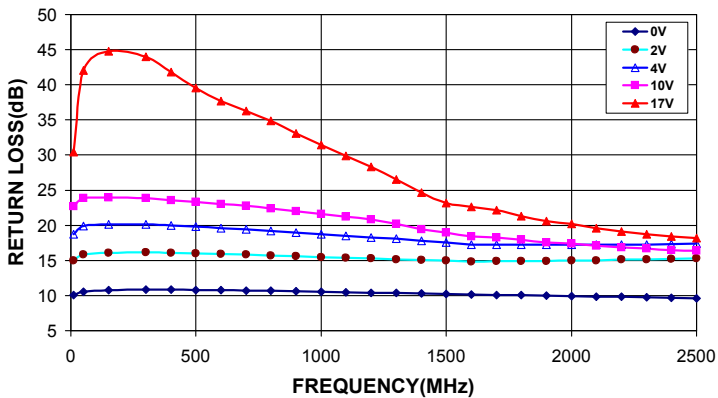

RVA-2500+
INPUT RETURN LOSS Vs. FREQUENCY
OVER CONTROL VOLTAGES @ V+=5V

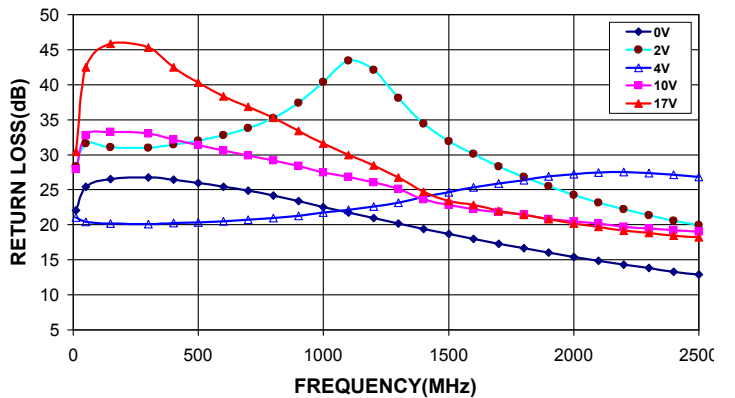


Notes


- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




RVA-2500+
OUTPUT RETURN LOSS Vs. FREQUENCY
OVER CONTROL VOLTAGES @ V+=3V

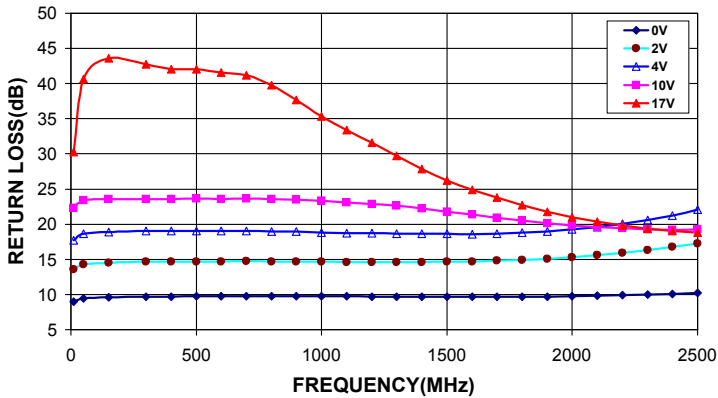


RVA-2500+
OUTPUT RETURN LOSS Vs. FREQUENCY
Vs. CONTROL VOLTAGE @ V+=5V

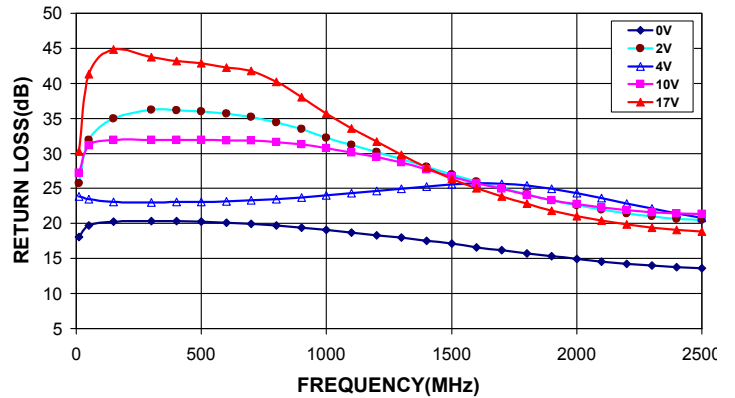


RVA-2500+
IP3 Vs. FREQUENCY
OVER CONTROL VOLTAGES @ V+=3V

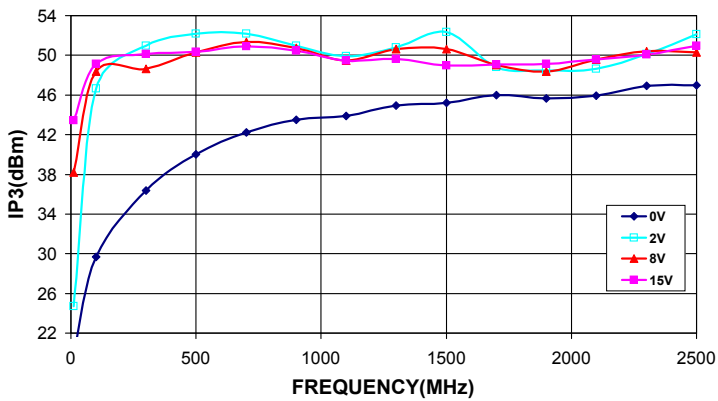


RVA-2500+
IP3 Vs. FREQUENCY
OVER CONTROL VOLTAGES @ V+=5V

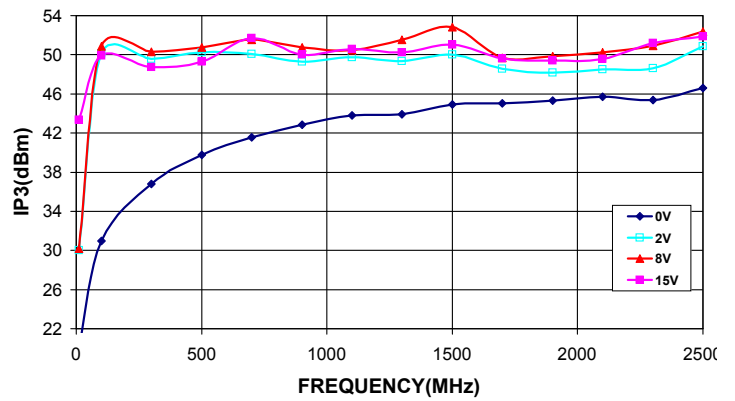

RVA-2500+
PHASE SHIFT Vs. FREQUENCY
OVER CONTROL VOLTAGES @ V+=3V

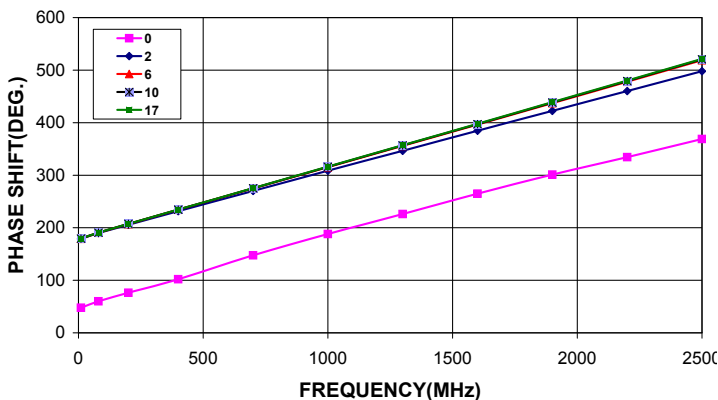

RVA-2500+
PHASE SHIFT Vs. FREQUENCY
OVER CONTROL VOLTAGES @ V+=5V

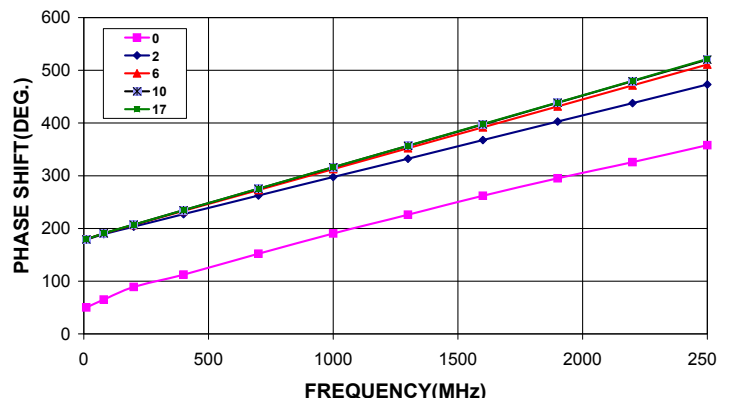

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Voltage Variable Attenuator

RVA-2500+

Typical Performance Data

| V CONTROL (V) | ATTENUATION @ 1000 MHz (dB) | |
|------------------|-----------------------------------|--------|
| | @V+=3V | @V+=5V |
| | 0.0 | 40.61 |
| 1.0 | 38.40 | 41.83 |
| 1.5 | 22.81 | 33.91 |
| 2.0 | 16.78 | 23.06 |
| 3.0 | 11.50 | 15.69 |
| 4.0 | 8.74 | 12.46 |
| 6.0 | 5.42 | 8.90 |
| 8.0 | 4.40 | 6.50 |
| 10.0 | 3.93 | 4.48 |
| 15.0 | 3.33 | 3.34 |
| 17.0 | 3.19 | 3.18 |

| FREQ. (MHz) | ATTENUATION Vs. V CONTROL Vs. V+ | | | | | | | | | |
|----------------|----------------------------------|--------|---------------|--------|---------------|--------|---------------|--------|----------------|--------|
| | (dB) | | | | | | | | | |
| | @V Control=0V | | @V Control=2V | | @V Control=4V | | @V Control=8V | | @V Control=17V | |
| | @V+=3V | @V+=5V | @V+=3V | @V+=5V | @V+=3V | @V+=5V | @V+=3V | @V+=5V | @V+=3V | @V+=5V |
| 10 | 86.30 | 83.44 | 22.30 | 22.87 | 8.47 | 12.20 | 4.18 | 6.16 | 2.93 | 2.92 |
| 50 | 75.64 | 74.19 | 22.17 | 22.82 | 8.42 | 12.21 | 4.13 | 6.18 | 2.92 | 2.91 |
| 80 | 73.13 | 69.95 | 22.14 | 22.81 | 8.42 | 12.22 | 4.14 | 6.19 | 2.93 | 2.92 |
| 100 | 69.73 | 67.24 | 22.14 | 22.79 | 8.43 | 12.23 | 4.14 | 6.20 | 2.94 | 2.93 |
| 150 | 64.77 | 63.05 | 22.14 | 22.83 | 8.44 | 12.25 | 4.16 | 6.21 | 2.95 | 2.95 |
| 200 | 60.87 | 59.86 | 22.19 | 22.83 | 8.45 | 12.27 | 4.16 | 6.23 | 2.96 | 2.95 |
| 250 | 57.26 | 57.26 | 22.21 | 22.85 | 8.47 | 12.28 | 4.18 | 6.25 | 2.99 | 2.97 |
| 300 | 54.92 | 54.85 | 22.17 | 22.81 | 8.48 | 12.29 | 4.18 | 6.25 | 2.99 | 2.98 |
| 400 | 50.72 | 51.56 | 22.25 | 22.87 | 8.51 | 12.30 | 4.21 | 6.28 | 3.01 | 3.00 |
| 500 | 48.14 | 49.03 | 22.36 | 22.90 | 8.54 | 12.33 | 4.24 | 6.32 | 3.04 | 3.03 |
| 600 | 45.98 | 47.07 | 22.45 | 22.94 | 8.56 | 12.36 | 4.26 | 6.34 | 3.07 | 3.06 |
| 700 | 44.23 | 45.44 | 22.51 | 22.98 | 8.62 | 12.39 | 4.30 | 6.39 | 3.10 | 3.09 |
| 800 | 42.76 | 44.16 | 22.61 | 23.01 | 8.65 | 12.41 | 4.34 | 6.42 | 3.12 | 3.11 |
| 900 | 41.64 | 42.92 | 22.73 | 23.04 | 8.71 | 12.43 | 4.37 | 6.46 | 3.16 | 3.14 |
| 1000 | 40.61 | 41.94 | 22.81 | 23.06 | 8.74 | 12.46 | 4.40 | 6.50 | 3.19 | 3.18 |
| 1100 | 39.71 | 41.10 | 22.95 | 23.11 | 8.80 | 12.49 | 4.45 | 6.56 | 3.23 | 3.22 |
| 1200 | 38.96 | 40.33 | 23.09 | 23.17 | 8.87 | 12.54 | 4.49 | 6.61 | 3.28 | 3.26 |
| 1300 | 38.13 | 39.62 | 23.20 | 23.20 | 8.92 | 12.58 | 4.54 | 6.68 | 3.32 | 3.31 |
| 1400 | 37.48 | 38.89 | 23.28 | 23.18 | 8.99 | 12.60 | 4.59 | 6.73 | 3.36 | 3.34 |
| 1500 | 36.80 | 38.35 | 23.31 | 23.22 | 9.04 | 12.61 | 4.61 | 6.78 | 3.39 | 3.37 |
| 1600 | 36.43 | 37.89 | 23.43 | 23.22 | 9.06 | 12.63 | 4.63 | 6.81 | 3.42 | 3.41 |
| 1700 | 36.04 | 37.44 | 23.63 | 23.27 | 9.14 | 12.67 | 4.70 | 6.89 | 3.47 | 3.46 |
| 1800 | 35.60 | 37.01 | 23.75 | 23.33 | 9.22 | 12.71 | 4.74 | 6.96 | 3.53 | 3.51 |
| 1900 | 35.21 | 36.58 | 23.88 | 23.35 | 9.31 | 12.73 | 4.81 | 7.04 | 3.59 | 3.56 |
| 2000 | 34.83 | 36.20 | 23.96 | 23.40 | 9.38 | 12.77 | 4.86 | 7.12 | 3.65 | 3.62 |
| 2100 | 34.47 | 35.73 | 24.09 | 23.43 | 9.45 | 12.83 | 4.91 | 7.20 | 3.70 | 3.69 |
| 2200 | 34.07 | 35.25 | 24.16 | 23.45 | 9.54 | 12.85 | 4.98 | 7.29 | 3.77 | 3.74 |
| 2300 | 33.68 | 34.72 | 24.27 | 23.49 | 9.61 | 12.88 | 5.04 | 7.38 | 3.84 | 3.82 |
| 2400 | 33.26 | 34.19 | 24.34 | 23.50 | 9.69 | 12.92 | 5.09 | 7.46 | 3.89 | 3.87 |
| 2500 | 32.90 | 33.62 | 24.44 | 23.54 | 9.79 | 12.96 | 5.17 | 7.55 | 3.98 | 3.95 |

REV. X1
RVA-2500+
070320
Page 1 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Voltage Variable Attenuator

RVA-2500+

Typical Performance Data

| FREQ. (MHz) | INPUT RETURN LOSS Vs. V CONTROL Vs. V+ | | | | | | | | | |
|----------------|--|--------|---------------|--------|---------------|--------|----------------|--------|----------------|--------|
| | (dB) | | | | | | | | | |
| | @V Control=0V | | @V Control=2V | | @V Control=4V | | @V Control=10V | | @V Control=17V | |
| | @V+=3V | @V+=5V | @V+=3V | @V+=5V | @V+=3V | @V+=5V | @V+=3V | @V+=5V | @V+=3V | @V+=5V |
| 10 | 10.05 | 22.08 | 14.97 | 28.31 | 18.73 | 21.04 | 22.68 | 27.96 | 30.43 | 30.47 |
| 50 | 10.57 | 25.44 | 15.81 | 31.59 | 19.86 | 20.44 | 23.88 | 32.76 | 42.04 | 42.49 |
| 80 | 10.68 | 26.15 | 16.00 | 31.15 | 20.07 | 20.22 | 24.08 | 33.57 | 46.04 | 46.93 |
| 100 | 10.71 | 26.45 | 16.08 | 30.85 | 20.17 | 20.13 | 24.10 | 33.75 | 46.16 | 47.13 |
| 150 | 10.75 | 26.53 | 16.08 | 31.09 | 20.13 | 20.20 | 23.94 | 33.23 | 44.74 | 45.88 |
| 200 | 10.80 | 26.85 | 16.16 | 30.74 | 20.22 | 20.09 | 24.01 | 33.57 | 46.12 | 47.67 |
| 250 | 10.79 | 26.67 | 16.12 | 31.02 | 20.14 | 20.17 | 23.84 | 32.96 | 43.58 | 44.69 |
| 300 | 10.82 | 26.76 | 16.15 | 30.99 | 20.15 | 20.13 | 23.84 | 32.98 | 44.00 | 45.31 |
| 400 | 10.82 | 26.43 | 16.09 | 31.47 | 20.00 | 20.26 | 23.60 | 32.17 | 41.81 | 42.52 |
| 500 | 10.79 | 25.97 | 16.03 | 31.97 | 19.81 | 20.37 | 23.34 | 31.39 | 39.57 | 40.26 |
| 600 | 10.77 | 25.46 | 15.91 | 32.78 | 19.59 | 20.53 | 23.01 | 30.60 | 37.64 | 38.31 |
| 700 | 10.73 | 24.85 | 15.82 | 33.79 | 19.41 | 20.72 | 22.75 | 29.86 | 36.31 | 36.84 |
| 800 | 10.68 | 24.14 | 15.70 | 35.21 | 19.21 | 20.95 | 22.43 | 29.19 | 34.86 | 35.26 |
| 900 | 10.63 | 23.37 | 15.59 | 37.38 | 18.95 | 21.26 | 22.02 | 28.42 | 33.09 | 33.42 |
| 1000 | 10.54 | 22.56 | 15.47 | 40.34 | 18.69 | 21.71 | 21.61 | 27.50 | 31.40 | 31.61 |
| 1100 | 10.48 | 21.74 | 15.35 | 43.39 | 18.49 | 22.13 | 21.20 | 26.85 | 29.84 | 29.95 |
| 1200 | 10.42 | 20.94 | 15.26 | 42.13 | 18.29 | 22.60 | 20.81 | 26.06 | 28.35 | 28.44 |
| 1300 | 10.36 | 20.16 | 15.15 | 38.13 | 18.07 | 23.18 | 20.21 | 25.15 | 26.55 | 26.75 |
| 1400 | 10.29 | 19.40 | 15.06 | 34.44 | 17.82 | 24.01 | 19.40 | 23.64 | 24.62 | 24.76 |
| 1500 | 10.21 | 18.66 | 14.97 | 31.95 | 17.58 | 24.67 | 18.93 | 22.82 | 23.14 | 23.43 |
| 1600 | 10.15 | 17.97 | 14.86 | 30.11 | 17.26 | 25.38 | 18.40 | 22.21 | 22.65 | 22.85 |
| 1700 | 10.10 | 17.29 | 14.87 | 28.35 | 17.25 | 25.88 | 18.26 | 21.85 | 22.14 | 22.01 |
| 1800 | 10.04 | 16.67 | 14.90 | 26.86 | 17.21 | 26.37 | 17.96 | 21.42 | 21.29 | 21.45 |
| 1900 | 10.02 | 16.06 | 14.94 | 25.50 | 17.22 | 26.94 | 17.58 | 20.83 | 20.61 | 20.77 |
| 2000 | 9.92 | 15.41 | 15.00 | 24.27 | 17.22 | 27.26 | 17.38 | 20.51 | 20.18 | 20.19 |
| 2100 | 9.86 | 14.86 | 15.01 | 23.18 | 17.21 | 27.44 | 17.12 | 20.16 | 19.60 | 19.68 |
| 2200 | 9.80 | 14.30 | 15.11 | 22.18 | 17.28 | 27.52 | 16.85 | 19.74 | 19.13 | 19.15 |
| 2300 | 9.74 | 13.81 | 15.12 | 21.33 | 17.27 | 27.40 | 16.67 | 19.48 | 18.76 | 18.85 |
| 2400 | 9.67 | 13.32 | 15.18 | 20.56 | 17.33 | 27.16 | 16.47 | 19.21 | 18.39 | 18.5 |
| 2500 | 9.61 | 12.90 | 15.26 | 19.92 | 17.42 | 26.83 | 16.37 | 19.01 | 18.15 | 18.25 |

REV. X1
RVA-2500+
070320
Page 2 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Voltage Variable Attenuator

RVA-2500+

Typical Performance Data

| FREQ. (MHz) | OUTPUT RETURN LOSS Vs. V CONTROL Vs. V+ | | | | | | | | | |
|----------------|---|--------|---------------|--------|---------------|--------|----------------|--------|----------------|--------|
| | (dB) | | | | | | | | | |
| | @V Control=0V | | @V Control=2V | | @V Control=4V | | @V Control=10V | | @V Control=17V | |
| | @V+=3V | @V+=5V | @V+=3V | @V+=5V | @V+=3V | @V+=5V | @V+=3V | @V+=5V | @V+=3V | @V+=5V |
| 10 | 9.00 | 18.06 | 13.58 | 25.72 | 17.71 | 23.84 | 22.29 | 27.26 | 30.24 | 30.30 |
| 50 | 9.42 | 19.68 | 14.26 | 31.89 | 18.64 | 23.50 | 23.39 | 31.16 | 40.68 | 41.33 |
| 80 | 9.51 | 19.99 | 14.42 | 33.62 | 18.84 | 23.25 | 23.56 | 31.79 | 43.56 | 44.65 |
| 100 | 9.55 | 20.12 | 14.47 | 34.36 | 18.91 | 23.12 | 23.63 | 31.96 | 44.06 | 45.23 |
| 150 | 9.59 | 20.24 | 14.51 | 34.94 | 18.92 | 23.09 | 23.59 | 31.93 | 43.60 | 44.82 |
| 200 | 9.65 | 20.35 | 14.61 | 35.90 | 19.04 | 22.98 | 23.65 | 32.23 | 44.12 | 45.27 |
| 250 | 9.65 | 20.30 | 14.60 | 35.71 | 18.99 | 23.06 | 23.56 | 31.82 | 42.85 | 43.95 |
| 300 | 9.69 | 20.33 | 14.64 | 36.25 | 19.05 | 23.00 | 23.60 | 31.96 | 42.76 | 43.73 |
| 400 | 9.71 | 20.32 | 14.64 | 36.11 | 19.02 | 23.05 | 23.56 | 31.94 | 42.01 | 43.17 |
| 500 | 9.75 | 20.25 | 14.69 | 35.98 | 19.06 | 23.11 | 23.61 | 31.92 | 42.06 | 42.87 |
| 600 | 9.76 | 20.12 | 14.70 | 35.65 | 19.07 | 23.18 | 23.60 | 31.82 | 41.55 | 42.29 |
| 700 | 9.77 | 19.98 | 14.71 | 35.21 | 19.03 | 23.29 | 23.63 | 31.83 | 41.21 | 41.77 |
| 800 | 9.78 | 19.73 | 14.70 | 34.44 | 18.97 | 23.44 | 23.57 | 31.60 | 39.78 | 40.20 |
| 900 | 9.76 | 19.40 | 14.68 | 33.45 | 18.93 | 23.68 | 23.48 | 31.29 | 37.70 | 37.99 |
| 1000 | 9.74 | 19.08 | 14.65 | 32.25 | 18.82 | 24.02 | 23.30 | 30.76 | 35.33 | 35.68 |
| 1100 | 9.72 | 18.70 | 14.59 | 31.21 | 18.76 | 24.34 | 23.08 | 30.10 | 33.37 | 33.58 |
| 1200 | 9.70 | 18.34 | 14.60 | 30.20 | 18.70 | 24.68 | 22.88 | 29.48 | 31.56 | 31.71 |
| 1300 | 9.70 | 17.96 | 14.60 | 29.16 | 18.65 | 24.98 | 22.60 | 28.71 | 29.71 | 29.84 |
| 1400 | 9.69 | 17.55 | 14.63 | 28.09 | 18.64 | 25.30 | 22.24 | 27.68 | 27.87 | 27.97 |
| 1500 | 9.67 | 17.10 | 14.65 | 27.01 | 18.61 | 25.55 | 21.80 | 26.71 | 26.24 | 26.37 |
| 1600 | 9.66 | 16.62 | 14.68 | 26.00 | 18.57 | 25.73 | 21.34 | 25.76 | 24.91 | 25.04 |
| 1700 | 9.65 | 16.17 | 14.79 | 25.05 | 18.68 | 25.65 | 20.93 | 24.92 | 23.76 | 23.85 |
| 1800 | 9.66 | 15.72 | 14.91 | 24.17 | 18.77 | 25.41 | 20.53 | 24.11 | 22.70 | 22.81 |
| 1900 | 9.70 | 15.32 | 15.09 | 23.35 | 18.97 | 24.98 | 20.16 | 23.34 | 21.73 | 21.80 |
| 2000 | 9.75 | 14.93 | 15.30 | 22.62 | 19.25 | 24.36 | 19.84 | 22.80 | 20.98 | 21.03 |
| 2100 | 9.81 | 14.58 | 15.59 | 22.00 | 19.60 | 23.62 | 19.62 | 22.32 | 20.34 | 20.40 |
| 2200 | 9.88 | 14.25 | 15.91 | 21.45 | 20.06 | 22.84 | 19.40 | 21.91 | 19.79 | 19.84 |
| 2300 | 9.99 | 13.99 | 16.34 | 21.01 | 20.61 | 22.12 | 19.29 | 21.63 | 19.36 | 19.41 |
| 2400 | 10.09 | 13.76 | 16.77 | 20.66 | 21.24 | 21.42 | 19.23 | 21.43 | 19.02 | 19.07 |
| 2500 | 10.24 | 13.64 | 17.28 | 20.49 | 22.07 | 20.84 | 19.27 | 21.32 | 18.82 | 18.87 |

Voltage Variable Attenuator

RVA-2500+

Typical Performance Data

| FREQ. (MHz) | INPUT IP3 Vs. V CONTROL Vs. V+ | | | | | | | | | |
|----------------|--------------------------------|--------|---------------|--------|---------------|--------|---------------|--------|----------------|--------|
| | (dBm) | | | | | | | | | |
| | @V Control=0V | | @V Control=2V | | @V Control=4V | | @V Control=8V | | @V Control=15V | |
| | @V+=3V | @V+=5V | @V+=3V | @V+=5V | @V+=3V | @V+=5V | @V+=3V | @V+=5V | @V+=3V | @V+=5V |
| 10 | 20.02 | 20.28 | 24.70 | 29.99 | 27.05 | 33.84 | 38.19 | 30.17 | 43.42 | 43.38 |
| 20 | 20.55 | 22.71 | 29.25 | 34.00 | 31.08 | 36.58 | 41.48 | 34.14 | 46.15 | 46.17 |
| 50 | 26.22 | 27.34 | 42.97 | 44.64 | 49.77 | 41.84 | 49.34 | 43.32 | 51.36 | 50.06 |
| 100 | 29.67 | 30.97 | 46.64 | 50.16 | 50.78 | 51.58 | 48.38 | 50.85 | 49.15 | 49.89 |
| 200 | 34.23 | 33.92 | 49.37 | 50.53 | 50.08 | 52.87 | 48.68 | 51.13 | 49.17 | 49.22 |
| 300 | 36.38 | 36.78 | 50.96 | 49.57 | 50.65 | 52.48 | 48.62 | 50.30 | 50.12 | 48.76 |
| 400 | 39.12 | 38.37 | 50.52 | 49.58 | 50.66 | 52.60 | 48.71 | 51.19 | 50.10 | 49.76 |
| 500 | 39.99 | 39.76 | 52.20 | 50.22 | 51.80 | 53.06 | 50.32 | 50.75 | 50.33 | 49.28 |
| 600 | 41.08 | 40.33 | 51.59 | 50.08 | 52.00 | 52.96 | 52.09 | 50.74 | 52.44 | 49.53 |
| 700 | 42.23 | 41.56 | 52.19 | 50.05 | 52.21 | 52.48 | 51.32 | 51.51 | 50.91 | 51.70 |
| 800 | 43.01 | 42.28 | 50.90 | 49.90 | 52.24 | 51.92 | 52.01 | 50.65 | 52.42 | 50.37 |
| 900 | 43.49 | 42.83 | 50.94 | 49.32 | 52.65 | 53.04 | 50.74 | 50.73 | 50.45 | 50.04 |
| 1000 | 44.08 | 43.56 | 50.43 | 50.37 | 50.32 | 50.06 | 50.05 | 50.02 | 50.09 | 50.12 |
| 1100 | 43.90 | 43.82 | 49.91 | 49.75 | 51.20 | 50.86 | 49.45 | 50.49 | 49.48 | 50.56 |
| 1200 | 44.80 | 43.90 | 51.03 | 49.81 | 51.21 | 52.67 | 51.28 | 51.35 | 50.15 | 50.11 |
| 1300 | 44.94 | 43.90 | 50.77 | 49.34 | 51.06 | 53.01 | 50.65 | 51.53 | 49.61 | 50.24 |
| 1400 | 45.68 | 44.01 | 52.09 | 49.31 | 50.88 | 50.16 | 51.23 | 51.33 | 49.62 | 51.48 |
| 1500 | 45.24 | 44.93 | 52.35 | 50.02 | 50.94 | 51.74 | 50.61 | 52.81 | 48.99 | 51.04 |
| 1600 | 45.88 | 45.65 | 48.56 | 48.27 | 48.22 | 48.00 | 49.14 | 50.05 | 49.19 | 49.37 |
| 1700 | 45.98 | 45.01 | 48.80 | 48.55 | 49.60 | 49.88 | 49.01 | 49.71 | 49.09 | 49.63 |
| 1800 | 45.11 | 44.90 | 49.46 | 49.36 | 48.54 | 48.00 | 48.16 | 49.46 | 48.01 | 49.07 |
| 1900 | 45.66 | 45.33 | 48.49 | 48.15 | 49.89 | 49.55 | 48.35 | 49.88 | 49.14 | 49.40 |
| 2000 | 46.32 | 46.01 | 49.74 | 48.09 | 48.46 | 49.49 | 48.93 | 49.55 | 48.92 | 49.51 |
| 2100 | 45.93 | 45.68 | 48.63 | 48.48 | 49.80 | 49.22 | 49.57 | 50.26 | 49.60 | 49.59 |
| 2200 | 46.80 | 46.31 | 48.90 | 48.59 | 50.03 | 49.55 | 48.76 | 50.32 | 49.44 | 49.61 |
| 2300 | 46.90 | 45.39 | 50.12 | 48.62 | 51.36 | 50.95 | 50.39 | 50.91 | 50.08 | 51.21 |
| 2400 | 47.02 | 46.52 | 50.07 | 51.47 | 51.34 | 51.68 | 50.65 | 52.51 | 51.80 | 51.30 |
| 2500 | 46.99 | 46.58 | 52.10 | 50.84 | 51.16 | 52.55 | 50.28 | 52.37 | 50.97 | 51.86 |

REV. X1
RVA-2500+
070320
Page 4 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Voltage Variable Attenuator

RVA-2500+

Typical Performance Data

| FREQ. (MHz) | PHASE SHIFT Vs. V CONTROL Vs. V+ | | | | | | | | | |
|----------------|----------------------------------|--------|---------------|--------|---------------|--------|----------------|--------|----------------|--------|
| | (deg) | | | | | | | | | |
| | @V Control=0V | | @V Control=2V | | @V Control=6V | | @V Control=10V | | @V Control=17V | |
| | @V+=3V | @V+=5V | @V+=3V | @V+=5V | @V+=3V | @V+=5V | @V+=3V | @V+=5V | @V+=3V | @V+=5V |
| 10 | 47.67 | 50.00 | 178.89 | 178.76 | 179.15 | 179.37 | 179.23 | 179.23 | 179.25 | 179.24 |
| 80 | 60.00 | 65.00 | 189.79 | 189.14 | 190.55 | 190.56 | 190.66 | 190.65 | 190.71 | 190.75 |
| 200 | 76.34 | 89.00 | 205.57 | 203.39 | 207.06 | 206.63 | 207.22 | 207.26 | 207.33 | 207.30 |
| 400 | 101.98 | 112.52 | 231.57 | 227.08 | 234.31 | 233.21 | 234.47 | 234.48 | 234.64 | 234.67 |
| 700 | 147.55 | 152.13 | 270.21 | 262.47 | 274.91 | 272.83 | 275.19 | 275.25 | 275.48 | 275.45 |
| 1000 | 188.13 | 190.38 | 308.51 | 297.61 | 315.42 | 312.57 | 315.88 | 315.96 | 316.28 | 316.27 |
| 1300 | 226.19 | 225.97 | 346.49 | 332.37 | 355.83 | 352.17 | 356.53 | 356.61 | 357.07 | 357.01 |
| 1600 | 264.83 | 261.93 | 384.62 | 367.72 | 396.40 | 391.85 | 397.27 | 397.40 | 397.97 | 397.99 |
| 1900 | 301.06 | 295.08 | 422.50 | 402.89 | 437.17 | 431.60 | 438.22 | 438.41 | 439.11 | 439.09 |
| 2200 | 334.49 | 325.74 | 460.31 | 437.73 | 477.92 | 471.26 | 479.20 | 479.28 | 480.15 | 480.14 |
| 2500 | 368.94 | 357.86 | 498.03 | 473.13 | 518.95 | 511.05 | 520.40 | 520.35 | 521.47 | 521.41 |

REV. X1
RVA-2500+
070320
Page 5 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




Voltage Variable Attenuator


Typical Performance Curves

RVA-2500+


Attenuation @ 1000 MHz

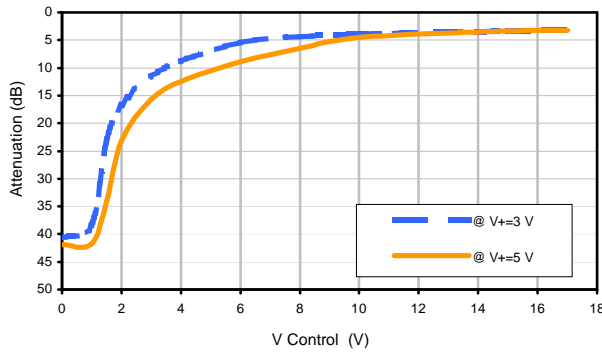


Attenuation @ V+=3 V

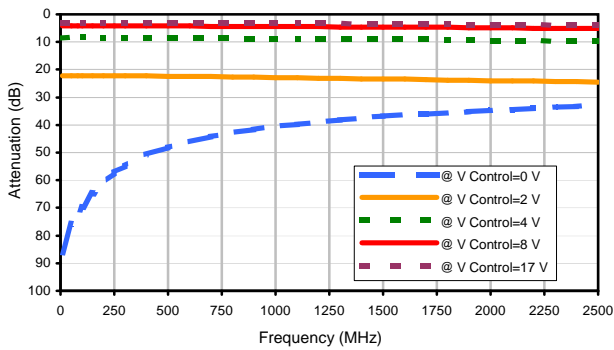


Attenuation @ V+=5 V

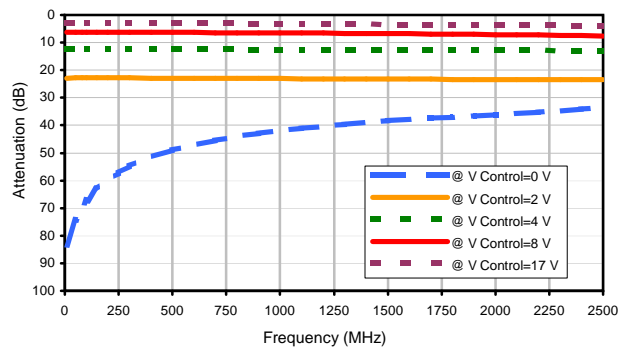


Input Return Loss @ V+=3 V

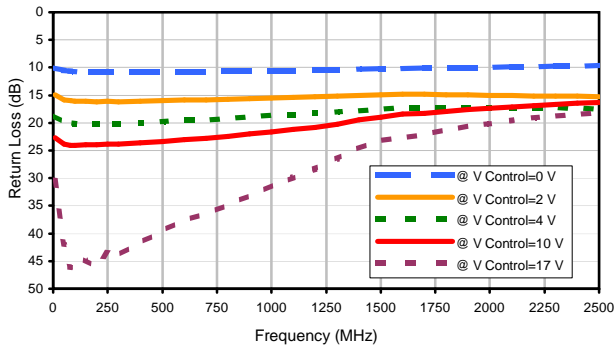


Input Return Loss @ V+=5 V

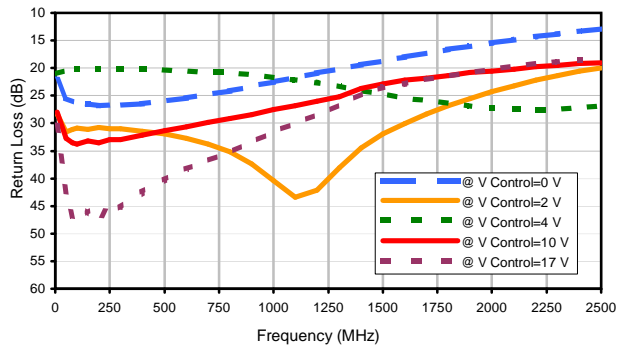

Output Return Loss @ V+=3 V

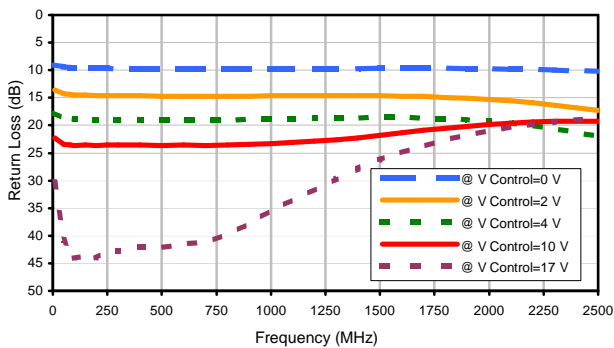

Output Return Loss @ V+=5 V

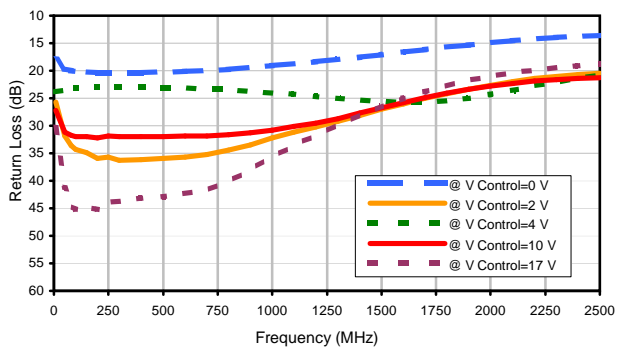

REV. X1
RVA-2500+
070320
Page 1 of 2



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




Voltage Variable Attenuator


RVA-2500+

Typical Performance Curves


Input IP3 @ V+=3 V

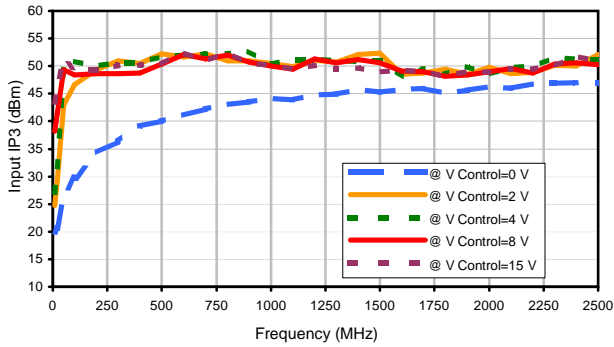


Input IP3 @ V+=5 V

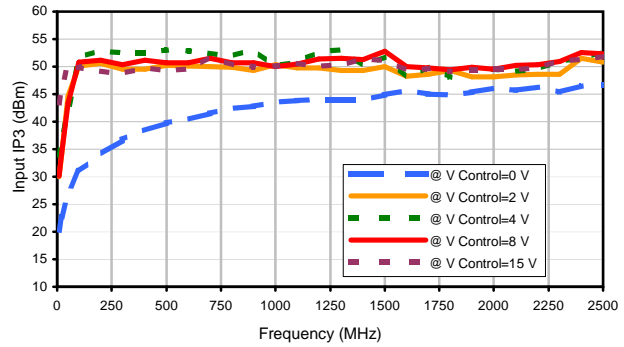

Phase Shift @ V+=3 V

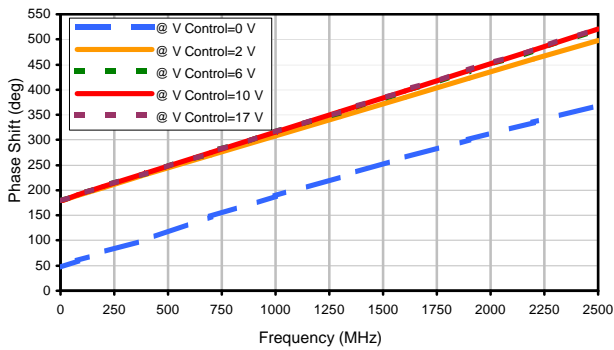

Phase Shift @ V+=5 V

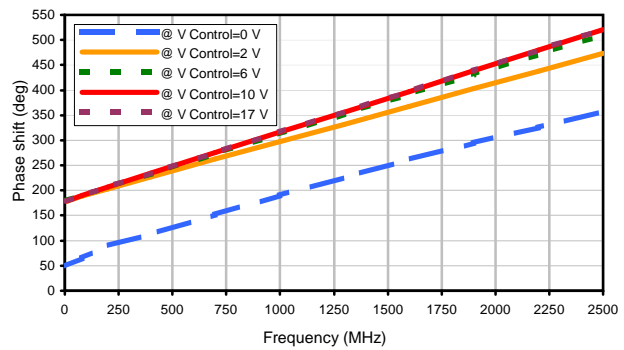

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661






The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




REV. X1
RVA-2500+
070320
Page 2 of 2

Outline Dimensions

DV874

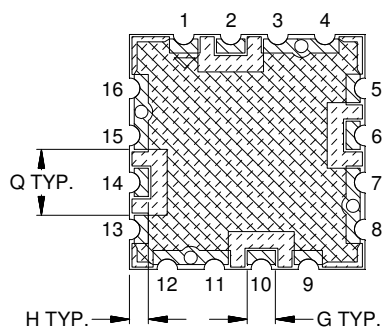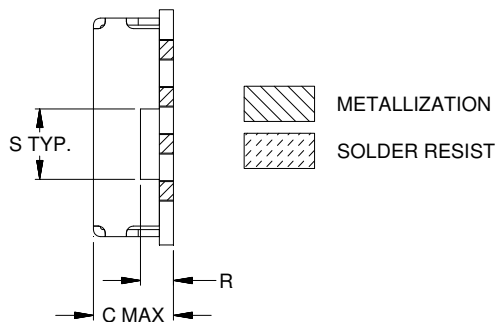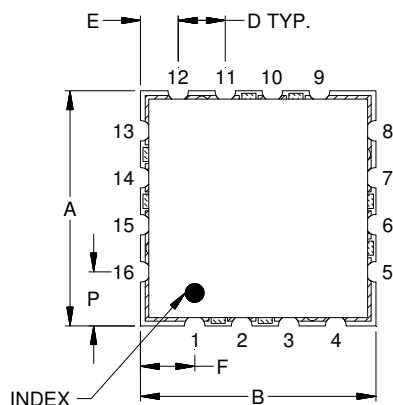

PCB Land Pattern

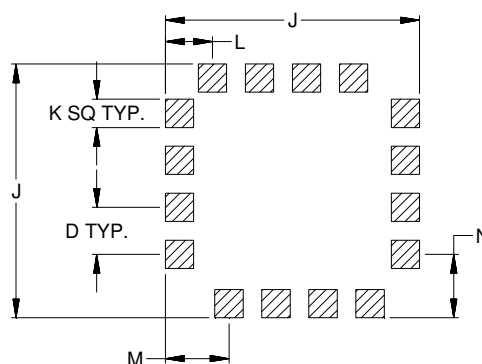

Suggested Layout,
Tolerance to be within ± 0.02

| CASE# | A | B | C | D | E | F | G | H | J | K | L | M |
|-------|-----------------|-----------------|----------------|----------------|----------------|----------------|----------------|----------------|-----------------|----------------|----------------|----------------|
| DV874 | .500 (12.70) | .500 (12.70) | .195 (4.95) | .100 (2.54) | .080 (2.03) | .115 (2.92) | .060 (1.52) | .040 (1.02) | .540 (13.72) | .060 (1.52) | .100 (2.54) | .135 (3.43) |

| CASE# | N | P | Q | R | S | WT.GRAM |
|-------|----------------|----------------|----------------|----------------|----------------|---------|
| DV874 | .135 (3.43) | .115 (2.92) | .140 (3.56) | .070 (1.78) | .150 (3.81) | 1.0 |

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .03$; 3Pl. $\pm .015$

Notes:

- Case material: Nickel-Silver alloy.
- Base: Printed wiring laminate.
- Termination finish:
 - For RoHS Case Styles: 3-5 μ inch (.08-.13 microns) Gold over 120-240 μ inch (3.05-6.10 microns) Nickel plate.
 - For RoHS-5 Case Styles: Tin-Lead plate.




P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

Tape & Reel Packaging TR-F37

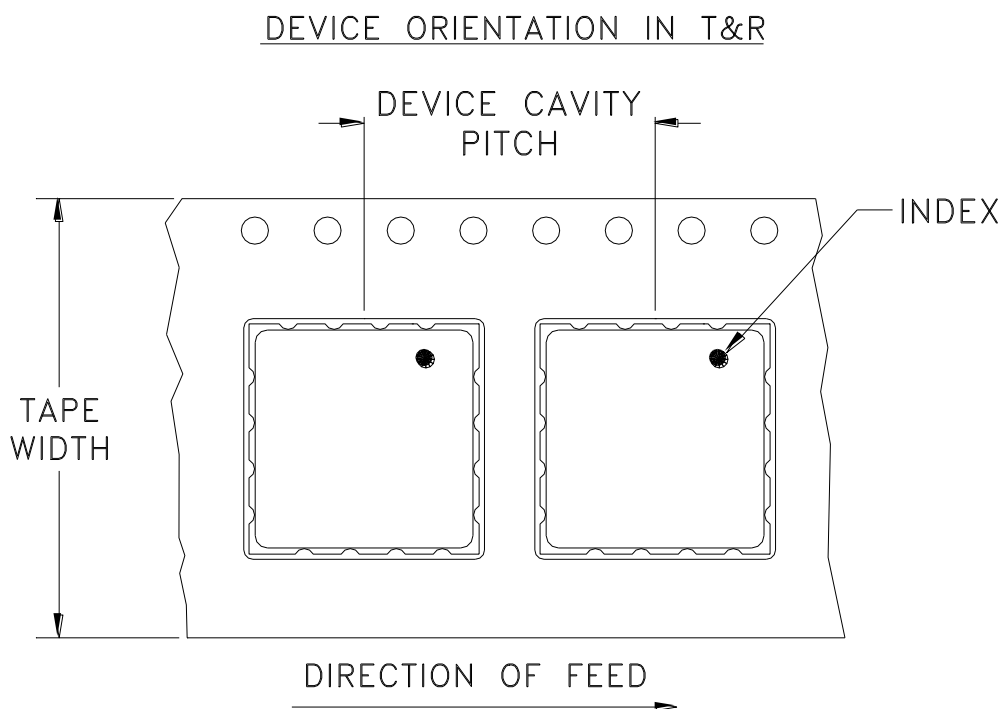

| Tape Width, mm | Device Cavity Pitch, mm | Reel Size, inches | Devices per Reel | |
|----------------|-------------------------|-------------------|-------------------------------------|-----|
| 24 | 16 | 7 | Small quantity standards (see note) | 10 |
| | | | | 20 |
| | | | | 50 |
| | | | | 100 |
| | | 13 | Standard | 200 |
| | | | 500 | |

Note: Please consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION



REVISIONS


| REV | ECN No. | DESCRIPTION | DATE | DR | AUTH |
|-----|---------|-----------------------|----------|----|------|
| A | M94233 | CHANGE LINE WIDTH | 09/04 | RZ | HH |
| B | M101567 | ADD CS: DV874 | 10/05 | DK | HH |
| B | R82061 | ADD CS: DV874 | 10/05 | DK | HH |
| C | M102713 | ADDED "...WITH SMOBC" | 01/12/06 | GF | IL |

SUGGESTED MOUNTING CONFIGURATION FOR DV894 & DV897 CASE STYLES, "np" PIN CONNECTION

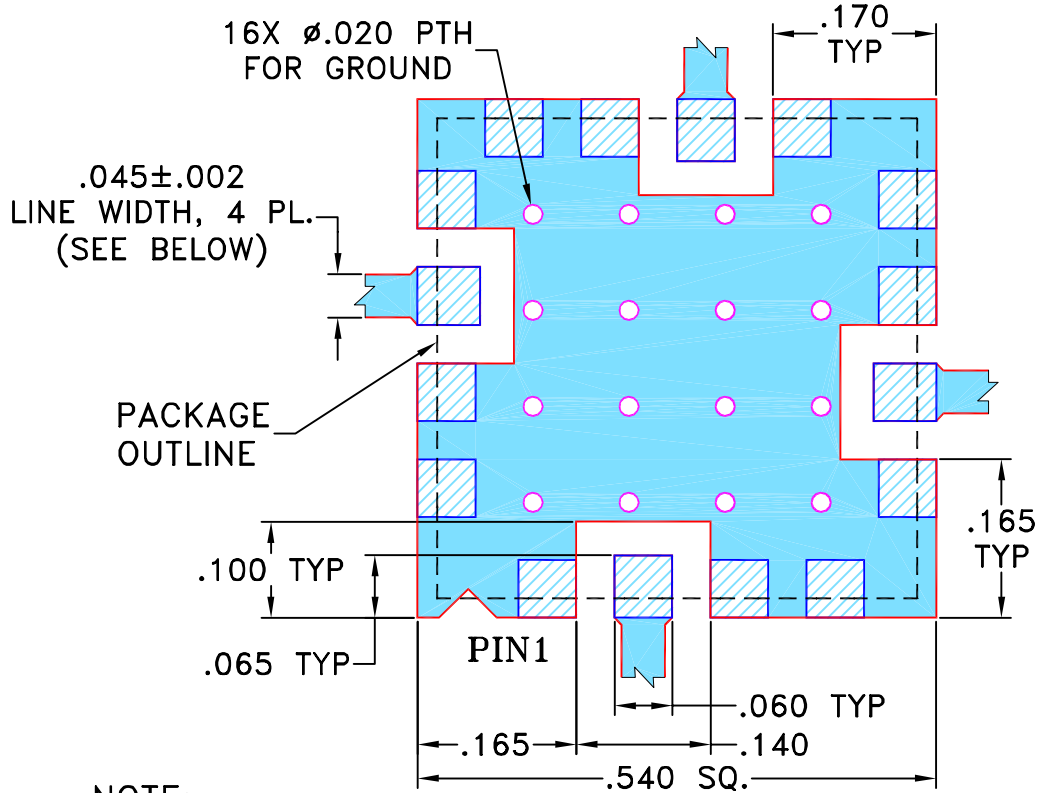

NOTE:

1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS 0.025" ± 0.0025"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

| UNLESS OTHERWISE SPECIFIED | INITIALS | | DATE |
|--|----------|------------|-----------|
| DIMENSIONS ARE IN INCHES TOLERANCES ON: 2 PL DECIMALS ± 3 PL DECIMALS ± .005 ANGLES ± FRACTIONS ± | DRAWN | DK (RAVON) | 28 OCT 05 |
| | CHECKED | RZ (RAVON) | 28 OCT 05 |
| | APPROVED | HH (RAVON) | 28 OCT 05 |



Mini-Circuits®


13 Neptune Avenue
 Brooklyn NY 11235

PL, np, DV894/897, RVA, TB-163


Mini-Circuits®
 THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

| SIZE | CODE IDENT | DRAWING NO: | REV: |
|-------|------------|-------------|---------------|
| A | 15542 | 98-PL-040 | C |
| FILE: | 98PL040 | SCALE: 5:1 | SHEET: 1 OF 1 |

Evaluation Board and Circuit

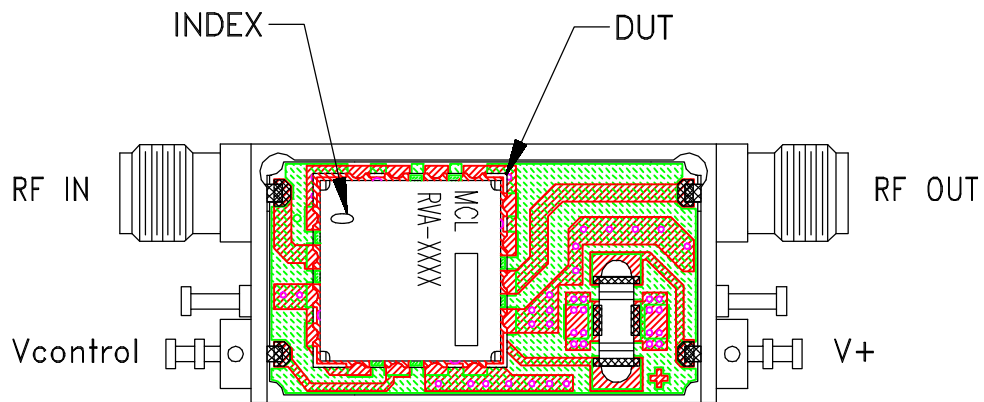


TB-163

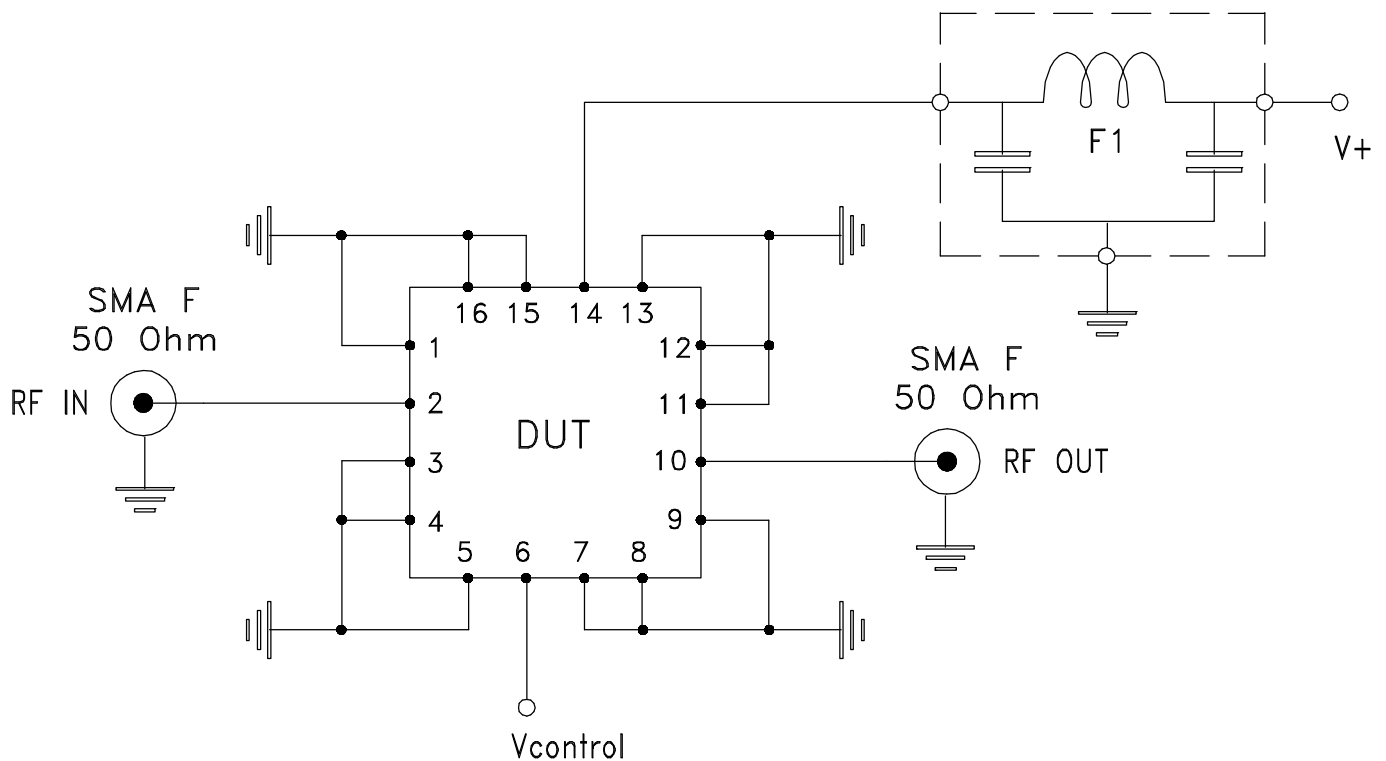

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: ROGERS R04350B or equivalent,
Dielectric Constant=4.5, Thickness=.020 inch.





All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

| Specification | Test/Inspection Condition | Reference/Spec |
|--------------------------------|---|--|
| Operating Temperature | -55° to 85°C Ambient Environment | Individual Model Data Sheet |
| Storage Temperature | -55° to 85° C Ambient Environment | Individual Model Data Sheet |
| Humidity | 90 to 95% RH, 240 hours, 50°C | MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours |
| Thermal Shock | -55° to 100°C, 100 cycles | MIL-STD-202, Method 107, Condition A-3, except +100°C |
| Solder Reflow Heat | Sn-Pb Eutectic Process: 225°C peak Pb-Free Process, 245°C peak | J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1 |
| Solderability | 10X Magnification | J-STD-002, Para 4.2.5, Test S, 95% Coverage |
| Vibration (High Frequency) | 20g peak, 20-2000 Hz, 4 times in each of three axes (total 12) | MIL-STD-883, Method 2007.3, Condition A |
| Mechanical Shock | 50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes | MIL-STD-202, Method 213, Condition A |
| Marking Resistance to Solvents | Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C | MIL-STD-202, Method 215 |