

# Power Splitter/Combiner **SBTC-2-10-7550+**

**Mini-Circuits** 2 Way-0° 50/75Ω 5 to 1000 MHz

#### **FEATURES**

- 75Ω Input, 50Ω Output
- Excellent Isolation, 24 dB Typ.
- Very Good Phase Unbalance, 1.0 deg. Typ.
- Small Size, 0.15x0.15x0.15"
- Temperature Stable LTCC Base
- Small Size
- Low Cost
- Aqueous Washable
- Protected by US Patent 6,963,255

#### **APPLICATIONS**

- Impedance Matching
- Balanced Amplifiers



Generic photo used for illustration purposes only CASE STYLE: AT790

> +RoHS Compliant The +Suffix identifies RoHS Compliance. our website for methodologies and qualifications

<b>ELECTRICAL SPE</b>	<b>CIFICATIONS AT +25°C</b>
-----------------------	-----------------------------

				1	
Parameter	Frequency (MHz)	Min.	Тур.	Max.	Unit
Frequency Range		5		1000	MHz
	5-50		0.5	1.3	
Insertion Loss Above 3.0 dB	50-500		0.6	1.1	dB
	500-1000		0.7	1.5	
	5-50	13	23		
Isolation	50-500	20	24		dB
	500-1000	20	26		
	5-50			6	
Phase Unbalance	50-500			3	Degree
	500-1000			5	
	5-50			0.8	
Amplitude Unbalance	50-500			0.5	dB
	500-1000			0.5	

#### **ABSOLUTE MAXIMUM RATINGS**

Parameter	Ratings
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C
Power Input (as a Splitter)	0.5 W max.
Internal Dissipation	0.125 W max

Permanent damage may occur if any of these limits are exceeded.

#### **ELECTRICAL SCHEMATIC**



REV. F ECO-015187 SBTC-2-10-7550+ MCL NY 250414

#### **Mini-Circuits**



# Power Splitter/Combiner **SBTC-2-10-7550+**

Mini-Circuits


2 Way-0° 50/75Ω 5 to 1000 MHz

#### **PIN CONNECTIONS**

SUM PORT	6 (75Ω)
PORT 1	3 (50Ω)
PORT 2	4 (50Ω)
GROUND	1,2
NOT USED	5

#### **PRODUCT MARKING: N/A**

#### DEMO BOARD MCL P/N: TB-147 SUGGESTED PCB LAYOUT (PL-092)




NOTE: TRACE WIDTH IS SHOWN FOR ROGERS R04350 WITH DIELECTRIC THICKNESS 0.030" ± 0.002", COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.


DENOTES PCB COPPER LAYOUT

C DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

#### **OUTLINE DRAWING**

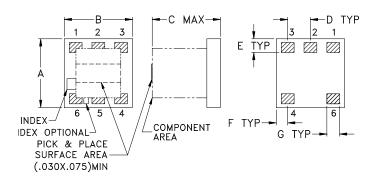

#### PCB Land Pattern



#### Suggested Layout, Tolerance to be within±002

#### OUTLINE DIMENSIONS (Inches)

	* 11111 *									
wt	K	J	н	G	F	E	D	С	В	Α
grams	.030	.160	.050	.028	.025	.030	.050	.150	.150	.150
0.10	0.76	4.06	1.27	0.71	0.64	0.76	1.27	3.81	3.81	3.81

#### **TAPE & REEL INFORMATION: F15**

#### Mini-Circuits

**IMPEDANCE MATCHING** 

2 Way-0°

## Power Splitter/Combiner **SBTC-2-10-7550+**


Mini-Circuits


50/75Ω 5 to 1000 MHz

#### **TYPICAL PERFORMANCE DATA**


Frequency (MHz)		dB) Amplitude Isolation Phase Unbalance (dB) Unbalance			Jnbalance (:1)			
(	S-1	S-2	(dB)		(deg.)	S	1	2
5.00	3.72	3.33	0.39	21.43	1.97	1.19	1.29	1.17
52.00	3.64	3.34	0.29	23.06	0.18	1.15	1.18	1.11
100.00	3.67	3.37	0.30	23.04	0.08	1.15	1.17	1.11
160.00	3.70	3.41	0.29	23.03	0.35	1.14	1.17	1.11
200.00	3.71	3.42	0.28	23.06	0.43	1.15	1.17	1.12
320.00	3.76	3.48	0.28	23.46	0.73	1.17	1.18	1.16
350.00	3.78	3.51	0.27	23.65	0.72	1.18	1.18	1.17
410.00	3.79	3.53	0.26	24.14	0.91	1.20	1.18	1.19
500.00	3.82	3.57	0.25	25.29	1.00	1.23	1.19	1.22
600.00	3.85	3.65	0.20	27.01	1.12	1.27	1.20	1.25
650.00	3.86	3.66	0.20	28.01	1.15	1.29	1.20	1.26
700.00	3.88	3.70	0.18	29.15	1.15	1.31	1.20	1.27
800.00	3.91	3.74	0.17	30.97	1.23	1.37	1.21	1.29
900.00	3.92	3.82	0.11	30.48	1.25	1.39	1.23	1.31
1000.00	3.98	3.90	0.07	28.90	1.23	1.38	1.27	1.35

1. Total Loss = Insertion Loss + 3 dB splitter loss.





VSWR



#### NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html


#### Mini-Circuits

## Case Style

### **Outline Dimensions**

**PCB Land Pattern** 

**AT790** 

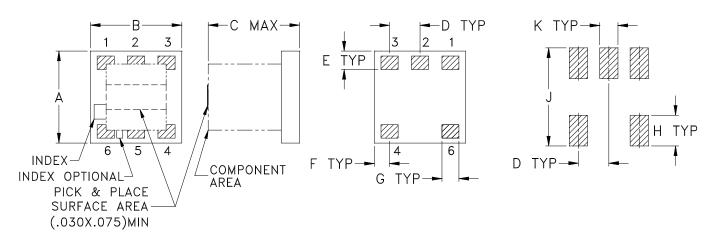

Suggested Layout, Tolerance to be within ±.002

CASE #	А	В	С	D	Е	F	G	Н	J	K	L	WT. GRAMS
AT790	.150	.150	.150	.050	.030	.025	.028	.050	.160	.030		.10
A1790	(3.81)	(3.81)	(3.81)	(1.27)	(0.76)	(0.64)	(0.71)	(1.27)	(4.06)	(0.76)		.10

Dimensions are in inches (mm). Tolerances: 2 Pl. <u>+</u>.01; 3 Pl. <u>+</u>.005

#### Notes:

- 1. Open style, Ceramic base.
- 2. Termination finish: Silver palladium or gold over nickel based on stock availability.






P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site

**RF/IF MICROWAVE COMPONENTS** 

The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

## Tape & Reel Packaging TR-F15

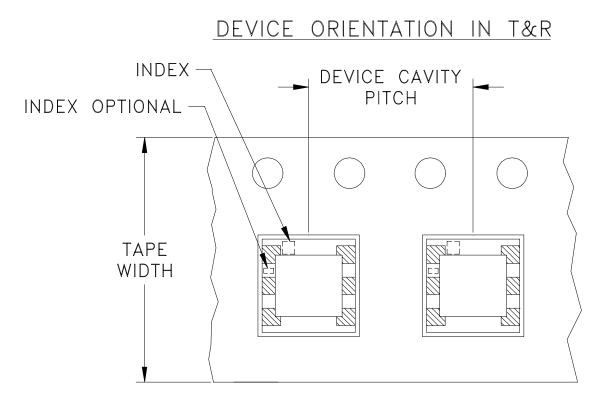

### DIRECTION OF FEED

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel
			20
			50
		7	100
12	8		200
			500
		13	1000
			2000

**Note**: Please consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.


Go to: www.minicircuits.com/pages/pdfs/tape.pdf

 Internet
 Internet
 http://www.minicircuits.com


 P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500
 Fax (718) 332-4661

 Distribution Centers NORTH AMERICA 800-654-7949
 • 417-335-5935
 • Fax 417-335-5945
 • EUROPE 44-1252-832600
 • Fax 44-1252-837010


 Mini-Circuits ISO 9001 & ISO 14001 Certified
 • So 14001 Certified
 • So 14001 Certified

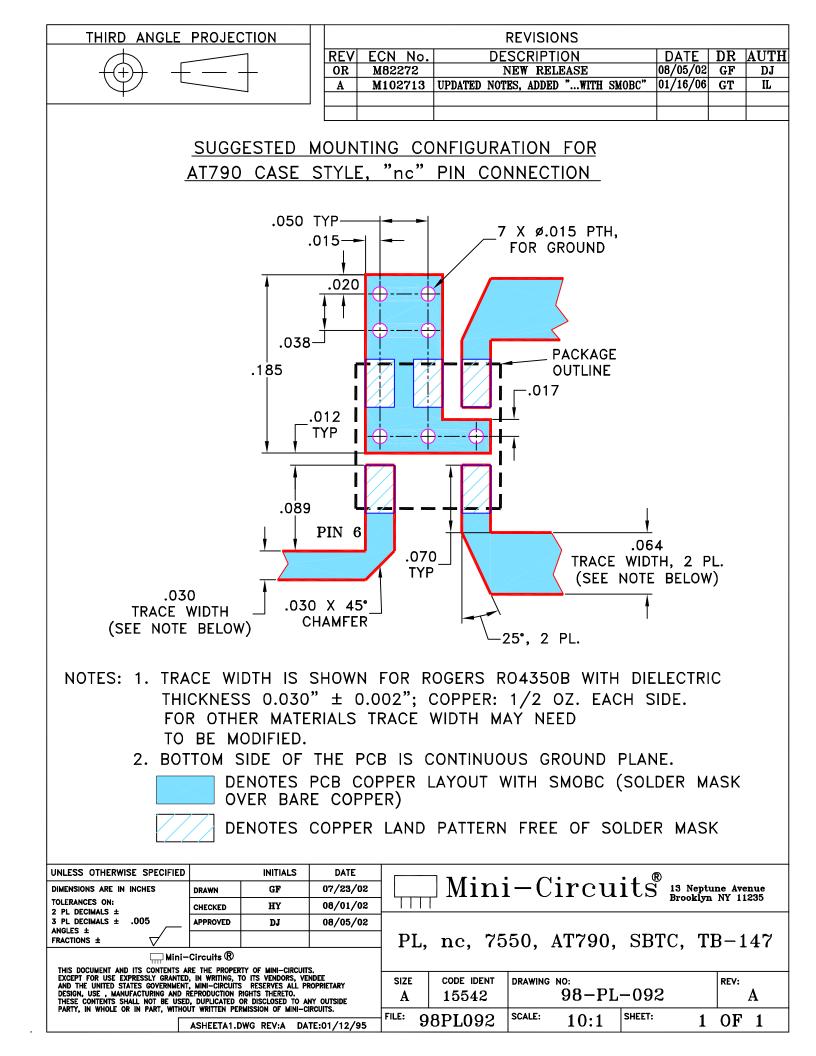

## Evaluation Board and Circuit



TB-147

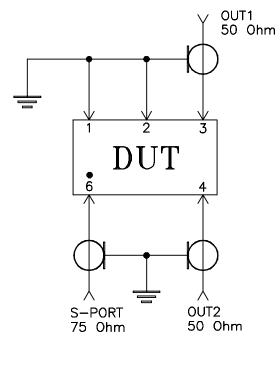

Schematic Diagram

### Notes:

- 1. 75 Ohm BNC AND 50 Ohm SMA Female connectors.
- 2. PCB Material: Rogers R04350 or equivalent, Dielectric Constant=3.5, Thickness=.030 inch.

**Mini-Circuits®** 

### Mini-Circuits

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215

ENV02T1 Rev: B 02/25/11 M130240 File: ENV02T1.pdf

This document and its contents are the property of Mini-Circuits.