



COAXIAL

# Adapter

## SF-MQK50+

50Ω DC to 18 GHz SMA-Female to SMA-Male

### FEATURES

- Quick connect/disconnect mating
- Excellent VSWR, 1.05:1 typ. up to 12.4 GHz and 1.15:1 typ. up to 18 GHz
- Low cost adapters, available from stock
- Rugged stainless steel body, gold plated



Generic photo used for illustration purposes only

<b>Model No.</b>	SF-MQK50+
<b>Case Style</b>	DJ836
<b>Connectors</b>	SMA Female to SMA Male

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

### APPLICATIONS

- Connector saver
- Cable extender

### ELECTRICAL SPECIFICATIONS $T_{AMB} = 25^{\circ}C$

Parameter	Condition (GHz)	Min.	Typ.	Max.	Units
Frequency Range		DC		18	GHz
Insertion Loss	DC - 18	—	0.1	—	dB
VSWR	DC - 8	—	—	1.15	:1
	DC - 12.4	—	—	1.25	
	DC - 18	—	—	1.25	

### ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.

REV. B  
ECO-016626  
SF-MQK50+  
MCL NY  
230126





COAXIAL


# Adapter

## SF-MQK50+

Mini-Circuits

50Ω DC to 18 GHz SMA-Female to SMA-Male

### OUTLINE DRAWING

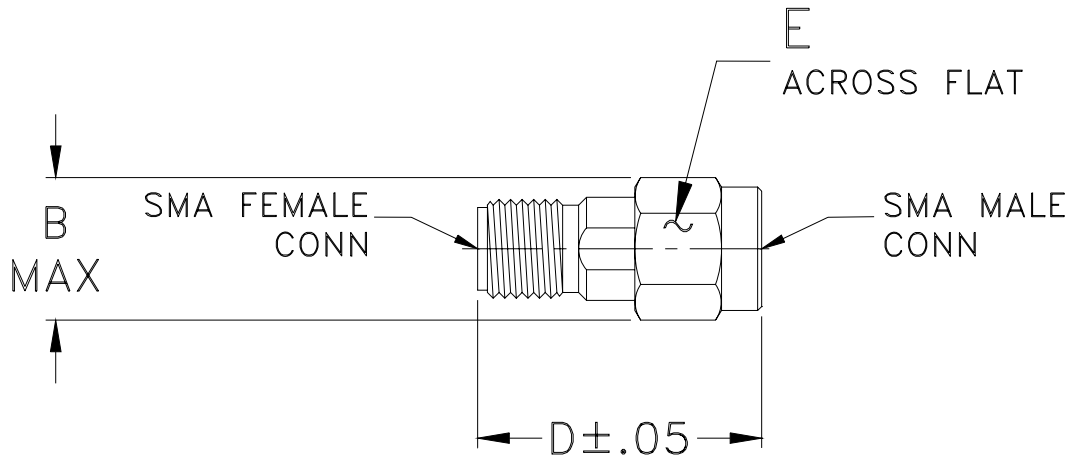

### OUTLINE DIMENSIONS (Inch/mm)

A	B	C	D	E	wt
--	.36	--	0.72	.312	grams
--	9.14	--	18.29	7.92	3.2



COAXIAL

# Adapter



## SF-MQK50+

Mini-Circuits

50Ω DC to 18 GHz SMA-Female to SMA-Male

### TYPICAL PERFORMANCE DATA

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	
		SMA-F	SMA-M
10.00	0.01	1.00	1.00
50.00	0.01	1.00	1.00
100.00	0.02	1.01	1.01
500.00	0.03	1.01	1.01
900.00	0.04	1.01	1.02
1000.00	0.04	1.02	1.02
2000.00	0.05	1.03	1.03
3000.00	0.06	1.05	1.05
4000.00	0.06	1.06	1.06
5000.00	0.07	1.07	1.07
6000.00	0.07	1.07	1.07
7000.00	0.07	1.07	1.08
8000.00	0.08	1.08	1.09
9000.00	0.09	1.10	1.11
10000.00	0.10	1.13	1.14
12000.00	0.09	1.18	1.13
13000.00	0.15	1.17	1.13
15000.00	0.12	1.13	1.14
16000.00	0.13	1.13	1.15
18000.00	0.18	1.16	1.15

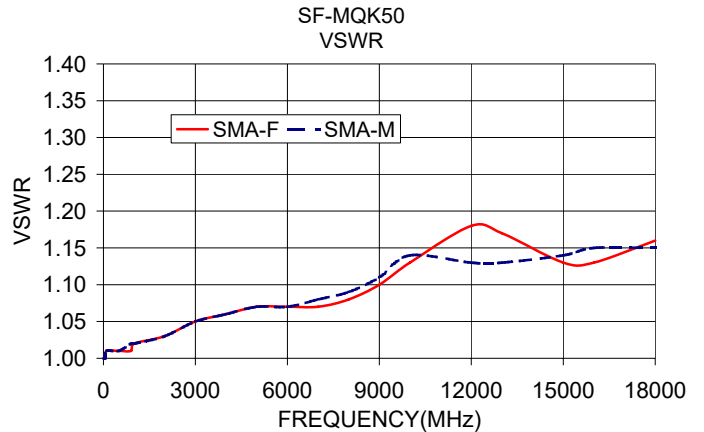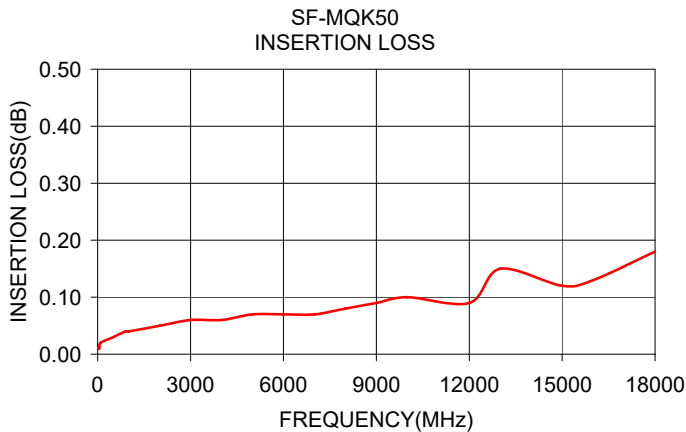

- NOTES**
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
  - B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
  - C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)



# Adapter, SMA-Female to SMA-Male

# SF-MQK50+

## Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	SMA-FEMALE RETURN LOSS (dB)	SMA-MALE RETURN LOSS (dB)
10	0.01	46.06	46.06
50	0.01	46.06	46.06
100	0.02	46.06	46.06
500	0.03	46.06	46.06
900	0.04	46.06	40.09
1000	0.04	40.09	40.09
2000	0.05	36.61	36.61
3000	0.06	32.26	32.26
4000	0.06	30.71	30.71
5000	0.07	29.42	29.42
6000	0.07	29.42	29.42
7000	0.07	29.42	28.30
8000	0.08	28.30	27.32
9000	0.09	26.44	25.66
10000	0.10	24.29	23.69
12000	0.09	24.29	23.69
13000	0.15	24.29	23.69
15000	0.12	24.29	23.69
16000	0.13	24.29	23.69
18000	0.18	24.29	23.69

REV. X1  
SF-MQK50+  
061114  
Page 1 of 1






IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant  
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



## Typical Performance Curves

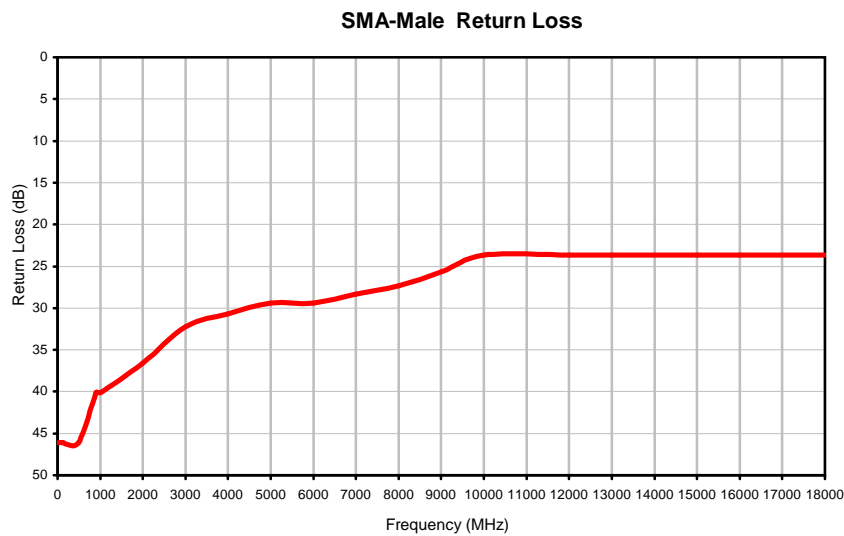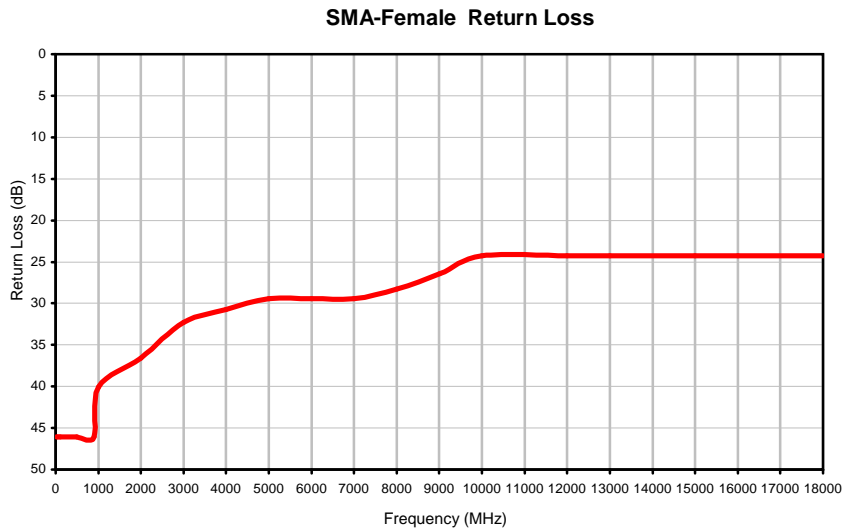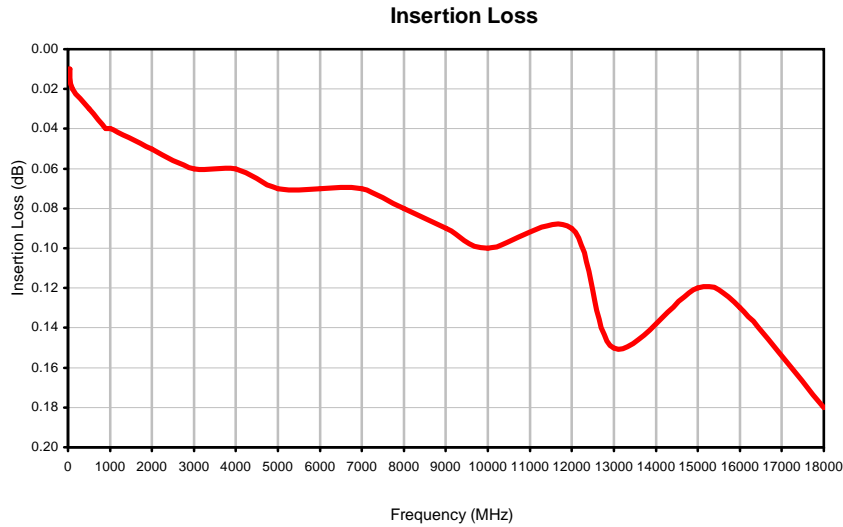

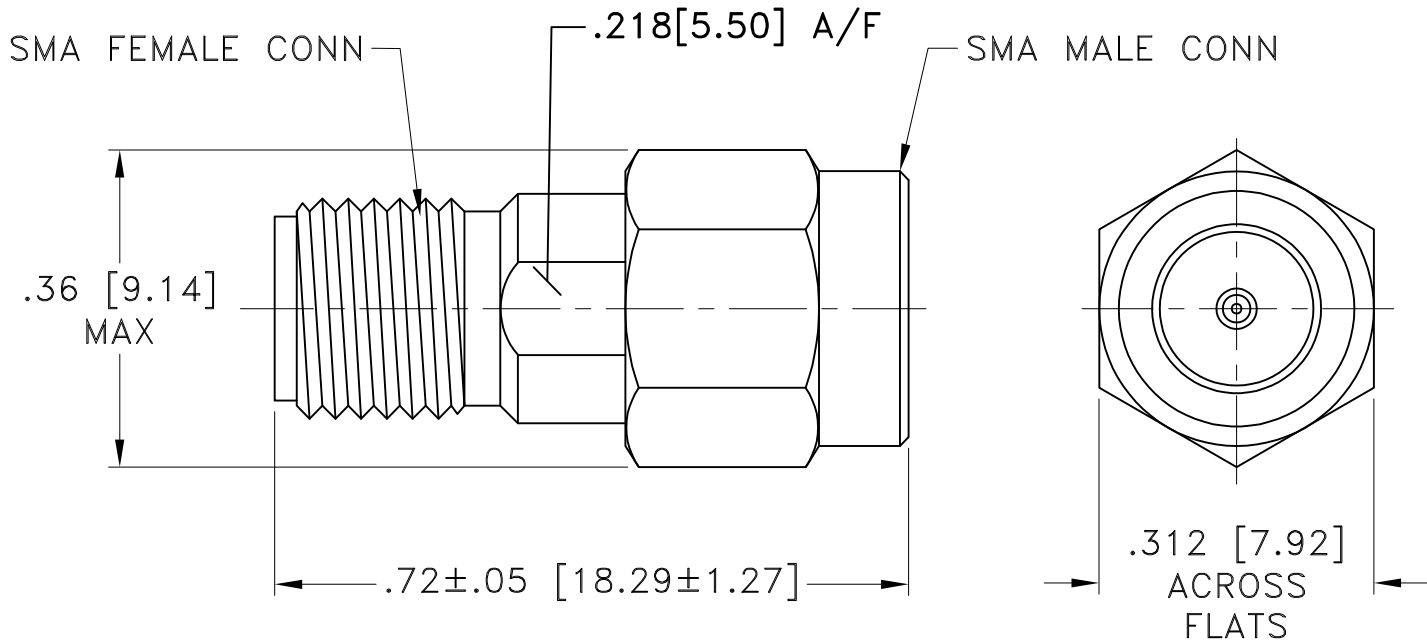

Weight: 3.2 grams

Dimensions are in inches [mm]. Tolerances: 2 Pl. ± .03; 3 Pl. ± .015 Inches

Notes:

1. Case material: Stainless steel.
2. Case Finish: Passivation or Gold Plating. (See individual model datasheet).
3. For polarity of connector refer individual model data sheet.

**Mini-Circuits®**  
ISO 9001 ISO 14001 CERTIFIED

ALL NEW  
[minicircuits.com](http://minicircuits.com)

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

<b>Specification</b>	<b>Test/Inspection Condition</b>	<b>Reference/Spec</b>
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I