

COAXIAL Adapter

50Ω DC to 18 GHz SMA Female Flange to SMA Male

SFFL-SM50+

Mini-Circuits

KEY FEATURES

- Wideband, DC to 18 GHz
- Low Insertion Loss, 0.06 dB Typ.
- Passivated Stainless Steel
- Four-Hole Flange Mount



Generic photo used for illustration purposes only

PRODUCT OVERVIEW

Mini-Circuits' SFFL-SM50+ is a coaxial flange-mount SMA Female to SMA Male adapter supporting a wide range of applications from DC to 18 GHz. This model provides excellent VSWR and low insertion loss versus frequency. The SFFL-SM50+ features passivated stainless-steel construction and measures only 0.80" in length.

ELECTRICAL SPECIFICATIONS AT +25°C, $Z_0 = 50\Omega^1$

Parameter	Frequency (GHz)	Min.	Typ.	Max.	Units
Frequency Range	-	DC	-	18	GHz
Insertion Loss	DC-10	-	0.05	0.1	dB
	10-18	-	0.06	0.2	
VSWR	DC-10	-	1.02	1.15	:1
	10-18	-	1.07	1.17	

1. Specifications are tested to minimum frequency of 0.01 GHz.

ABSOLUTE MAXIMUM RATINGS²

Operating Case Temperature	-40 °C to +100 °C
Storage Temperature	-55 °C to +100 °C


2. Permanent damage may occur if any of these limits are exceeded.

REV. OR
ECO-027635
SFFL-SF50+
MCL NY
251112

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 1 OF 4



COAXIAL




Adapter

SFFL-SM50+

50Ω DC to 18 GHz SMA Female Flange to SMA Male


Mini-Circuits

TYPICAL PERFORMANCE GRAPHS

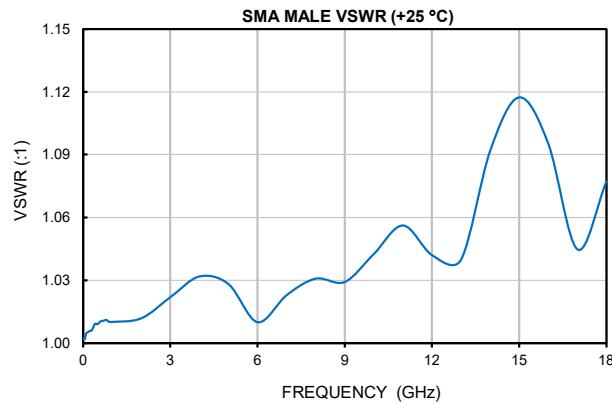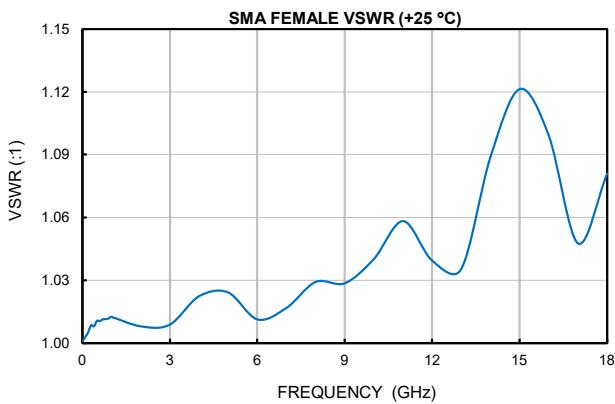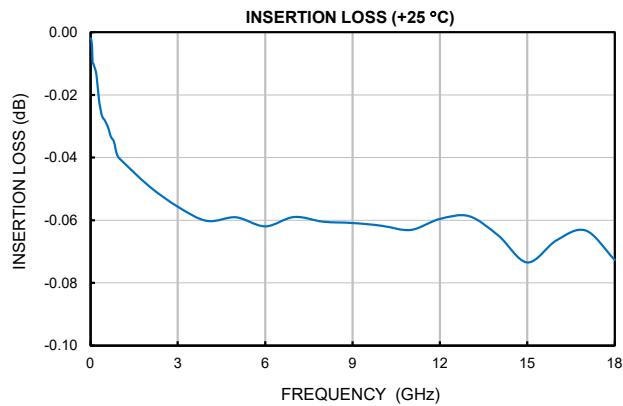**Mini-Circuits®**

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 2 OF 4



COAXIAL Adapter


SFFL-SM50+

50Ω DC to 18 GHz SMA Female Flange to SMA Male

CONNECTOR SPECIFICATIONS

Description	Connector 1	Connector 2
Connector Type	SMA-Female	SMA-Male
Orientation	Straight	Straight

CASE STYLE DRAWING

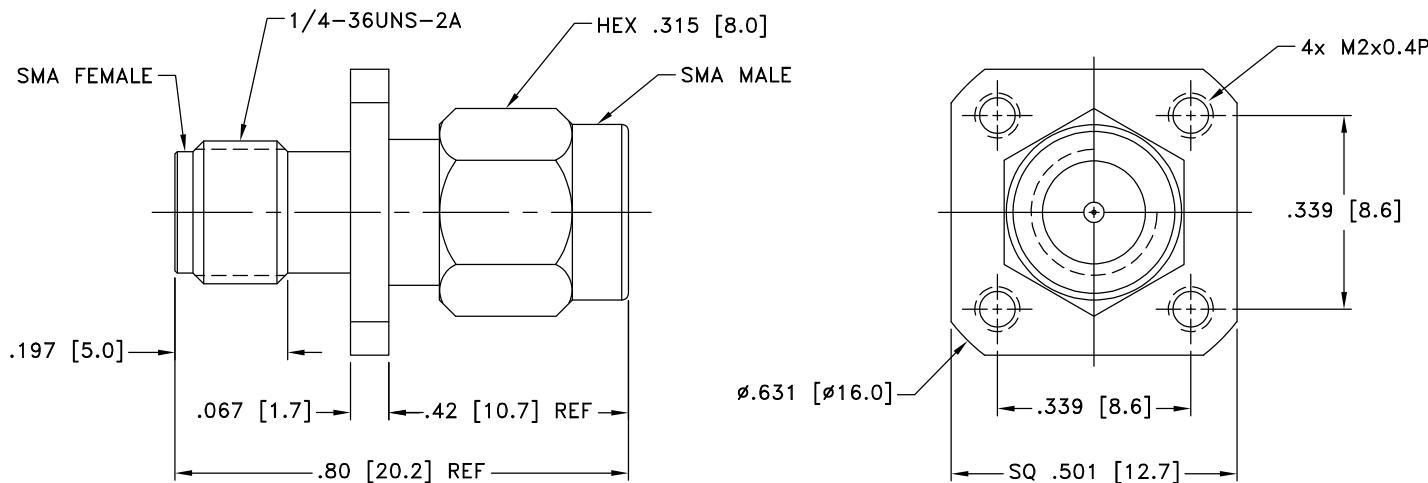


Weight: 5.3 grams

Dimensions are in inches [mm]. Tolerances: 2 Pl. ± 0.3 ; 3 Pl. $\pm .015$ inches

PRODUCT MARKING*: SFFL-SM50+

*Marking may contain other features or characters for internal lot control.



COAXIAL

Adapter

SFFL-SM50+

50Ω DC to 18 GHz SMA Female Flange to SMA Male

ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD**CLICK HERE**

Performance Data & Graphs	Data Graphs S-Parameter (S2P Files) Data Set (.zip file)
Case Style	DJ1821-3
RoHS Status	Compliant
Environmental Ratings	ENV72

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

Mini-Circuits®www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 4 OF 4

Adapter, SMA-Female Flange to SMA-Male

SFFL-SM50+

Typical Performance Data

FREQ. (GHz)	INSERTION LOSS (dB)	SMA-FEMALE VSWR (:1)	SMA-MALE VSWR (:1)
0.01	0.00	1.00	1.00
0.05	0.00	1.00	1.00
0.07	0.01	1.00	1.00
0.10	0.01	1.00	1.00
0.20	0.01	1.01	1.01
0.30	0.02	1.01	1.01
0.40	0.03	1.01	1.01
0.50	0.03	1.01	1.01
0.60	0.03	1.01	1.01
0.70	0.03	1.01	1.01
0.80	0.03	1.01	1.01
0.90	0.04	1.01	1.01
1.00	0.04	1.01	1.01
2.00	0.05	1.01	1.01
3.00	0.06	1.01	1.02
4.00	0.06	1.02	1.03
5.00	0.06	1.02	1.03
6.00	0.06	1.01	1.01
7.00	0.06	1.02	1.02
8.00	0.06	1.03	1.03
9.00	0.06	1.03	1.03
10.00	0.06	1.04	1.04
11.00	0.06	1.06	1.06
12.00	0.06	1.04	1.04
13.00	0.06	1.04	1.04
14.00	0.06	1.09	1.09
15.00	0.07	1.12	1.12
16.00	0.07	1.10	1.10
17.00	0.06	1.05	1.04
18.00	0.07	1.08	1.08

 **Mini-Circuits®**
ISO 9001 ISO 14001 AS 9100 CERTIFIED



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
 **The Design Engineers Search Engine** Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

 minicircuits.com

REV. OR
SFFL-SM50+
11/12/2025
Page 1 of 1

Typical Performance Curves

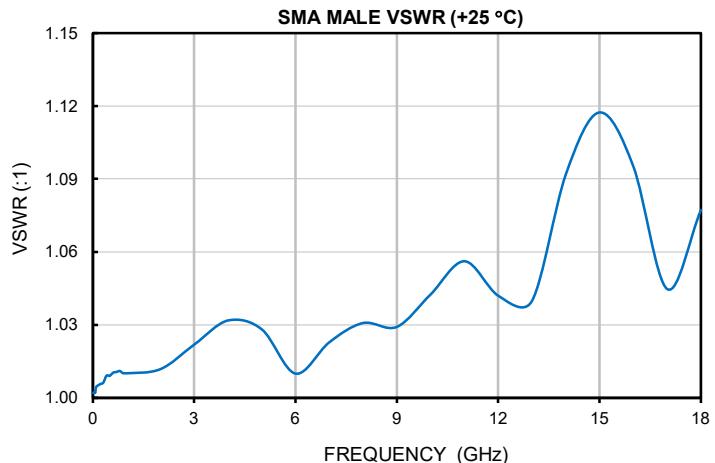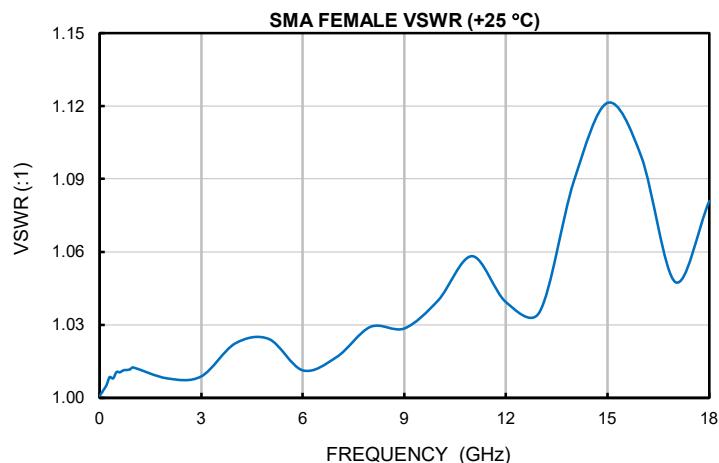


Case Style

DJ

Outline Dimensions

DJ1821-3

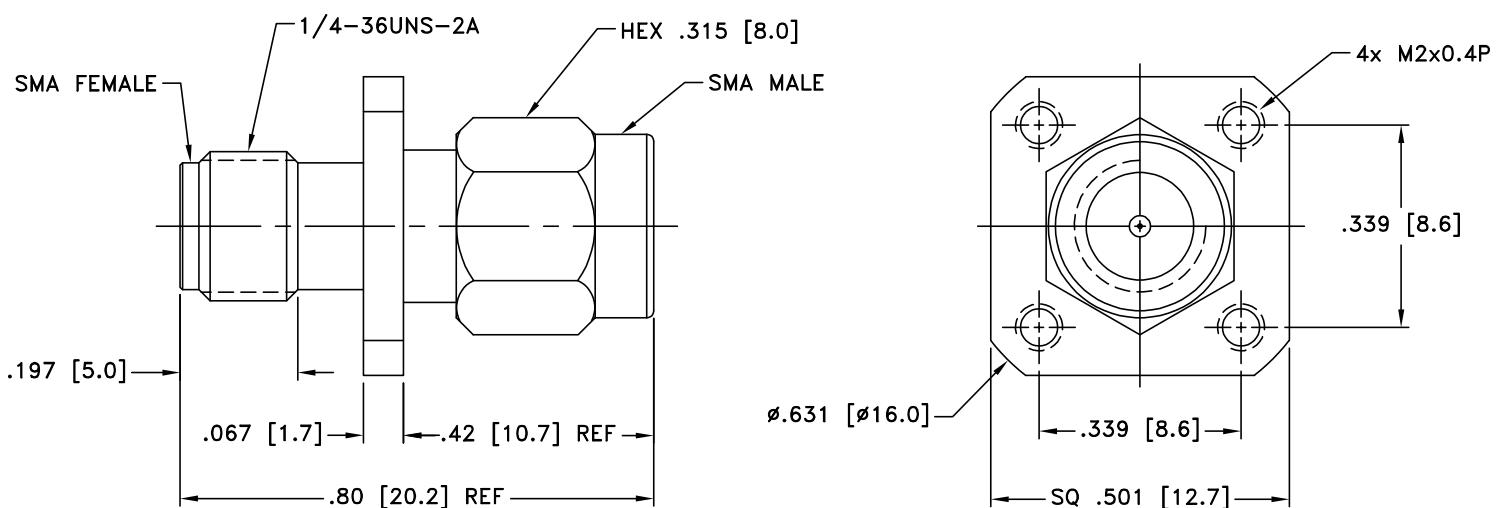

Weight: 5.3 grams

Dimensions are in inches [mm]. Tolerances: 2 Pl. \pm .03; 3 Pl. \pm .015 Inches

Notes:

Case material: Stainless steel.
Finish: Passivation.

 **Mini-Circuits**[®]
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IIF MICROWAVE COMPONENTS



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 100° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Thermal Shock	-40° to 120°C, 10 cycles	MIL-STD-202, Method 107, Condition A, except -40° to +120°C, and 10 cycles