

DC Pass

# Matching Transformer

SFMP-5075+

50/75Ω

DC to 2500 MHz

## The Big Deal

- Low Insertion loss, 0.4 dB typical
- 1W Power Handling
- DC Passing up to of 350mA
- SMA-F (50Ω) to F-Type-M (75Ω)



CASE STYLE: FF1891

## Product Overview

Mini-Circuits' SFMP-5075+ is a coaxial 50/75Ω matching transformer covering the DC to 2500 MHz frequency range, supporting impedance matching in a wide range of systems including CATV, broadband networks, and more. This model is ideal for 50/75Ω impedance matching in systems where minimizing overall signal loss is a priority. The transformer handles RF input power up to 1W and is capable of passing DC current up to 350mA. Measuring only 2.22 (l) x 0.67" (dia.), the transformer comes housed in a rugged, nickel-plated brass case with SMA-F (50Ω) to F-Type-M (75Ω) connectors.

## Key Features

| Feature                              | Advantages  |
|--------------------------------------|---|
| Wideband, DC to 2500 MHz             | Supports a wide variety of applications including CATV and DOCSIS® 3.1 systems and equipment.       |
| Low insertion loss, 0.4 dB           | Enables excellent signal power transmission from input to output, minimizing overall system losses. |
| 1W power handling                    | Supports a range of system power requirements.  |
| DC Passing up to 350mA               | Supports applications where DC passing is needed through the RF line.                               |
| Compact size, 2.2 (l) x 0.67" (dia.) | Accommodates tight space requirements for crowded system layouts.                                   |
| SMA-F (50Ω) to F-Type-M connectors   | Supports connections between components with different connector types.                             |

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# DC Pass Matching Transformer

## SFMP-5075+

50/75Ω

DC to 2500 MHz



### Maximum Ratings

|                       |                |
|-----------------------|----------------|
| Operating Temperature | -40°C to 85°C  |
| Storage Temperature   | -55°C to 100°C |
| DC Current            | 350mA max.     |
| DC Resistance         | 0.08Ω max.     |

Permanent damage may occur if any of these limits are exceeded.

### Features

- Low matching loss of 0.4 dB typical
- Wideband coverage, DC-2500MHz
- Connectorized package

CASE STYLE: FF1891  
Connectors Model  
50Ω S-F SFMP-5075+  
75Ω F-M

### Applications

- Impedance matching
- General Wireless Communications

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


### Coaxial Connections

|        |            |
|--------|------------|
| Input  | SMA-Female |
| Output | F-Male     |

### Electrical Specifications at 25°C

| Parameter       | Frequency (MHz) | Min. | Typ. | Max. | Unit |
|-----------------|-----------------|------|------|------|------|
| Frequency Range | -               | DC   | -    | 2500 | MHz  |
| Insertion Loss  | 10              | -    | -    | 1.0  | dB   |
|                 | 950-2500        | -    | 0.4  | 1.2  |      |
| VSWR            | 10              | -    | -    | 1.8  | :1   |
|                 | 950-2500        | -    | -    | 1.7  |      |
| Power           | DC-2500         | -    | -    | 1    | W    |

### Outline Drawing

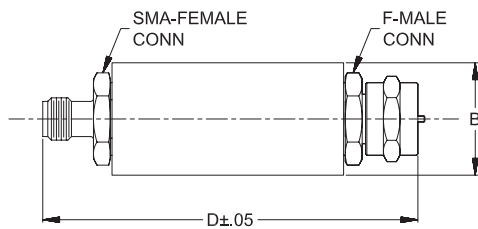




### Outline Dimensions (inch/mm)

| A  | B     | C  | D     | E  | Wt.   |
|----|-------|----|-------|----|-------|
| -- | .67   | -- | 2.22  | -- | grams |
| -- | 17.02 | -- | 56.39 | -- | 35    |

### Typical Performance Data

| Frequency (MHz) | Insertion Loss (dB) | VSWR |      |
|-----------------|---------------------|------|------|
|                 |                     | 50 Ω | 75 Ω |
| 10              | 0.01                | 1.50 | 1.50 |
| 50              | 0.03                | 1.50 | 1.49 |
| 100             | 0.07                | 1.50 | 1.48 |
| 250             | 0.19                | 1.47 | 1.45 |
| 500             | 0.32                | 1.37 | 1.36 |
| 950             | 0.17                | 1.21 | 1.16 |
| 1000            | 0.17                | 1.20 | 1.16 |
| 1950            | 0.26                | 1.45 | 1.38 |
| 2300            | 0.38                | 1.37 | 1.33 |
| 2500            | 0.40                | 1.27 | 1.27 |

### Config. D

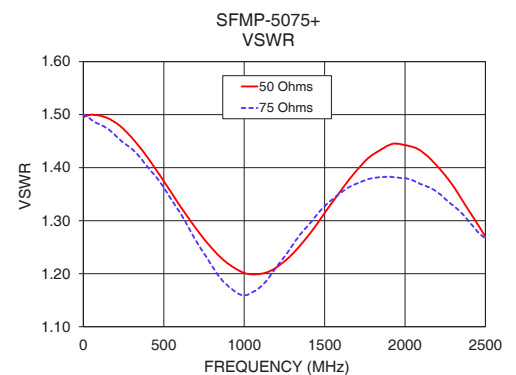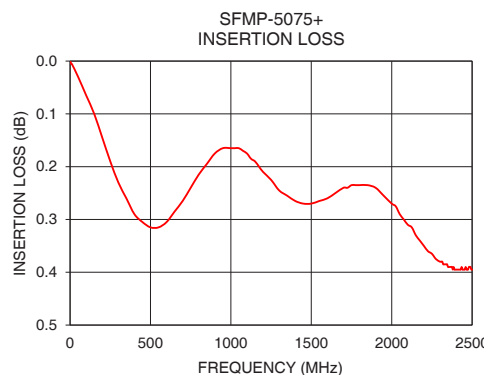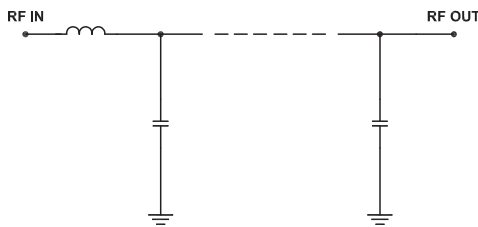

### Notes



- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



## Typical Performance Data


| FREQ.   | INSERTION LOSS | INPUT RETURN LOSS (50Ω) | OUTPUT RETURN LOSS (75Ω) |
|---------|----------------|-------------------------|--------------------------|
| (MHz)   | (dB)           | (dB)                    | (dB)                     |
| 1.00    | 0.00           | 14.05                   | 13.97                    |
| 10.00   | 0.01           | 14.02                   | 14.00                    |
| 50.00   | 0.03           | 13.98                   | 14.12                    |
| 100.00  | 0.07           | 14.00                   | 14.24                    |
| 125.00  | 0.09           | 14.03                   | 14.29                    |
| 150.00  | 0.10           | 14.07                   | 14.36                    |
| 175.00  | 0.13           | 14.13                   | 14.45                    |
| 200.00  | 0.15           | 14.19                   | 14.56                    |
| 225.00  | 0.17           | 14.27                   | 14.66                    |
| 250.00  | 0.19           | 14.37                   | 14.77                    |
| 300.00  | 0.23           | 14.61                   | 14.95                    |
| 325.00  | 0.25           | 14.75                   | 15.06                    |
| 350.00  | 0.26           | 14.90                   | 15.21                    |
| 400.00  | 0.29           | 15.23                   | 15.54                    |
| 425.00  | 0.30           | 15.42                   | 15.71                    |
| 450.00  | 0.31           | 15.62                   | 15.88                    |
| 475.00  | 0.31           | 15.82                   | 16.07                    |
| 500.00  | 0.32           | 16.04                   | 16.29                    |
| 525.00  | 0.32           | 16.27                   | 16.53                    |
| 550.00  | 0.32           | 16.51                   | 16.79                    |
| 575.00  | 0.31           | 16.76                   | 17.04                    |
| 600.00  | 0.31           | 17.02                   | 17.31                    |
| 625.00  | 0.30           | 17.27                   | 17.62                    |
| 650.00  | 0.29           | 17.53                   | 17.97                    |
| 675.00  | 0.28           | 17.80                   | 18.34                    |
| 700.00  | 0.27           | 18.07                   | 18.72                    |
| 725.00  | 0.26           | 18.35                   | 19.09                    |
| 750.00  | 0.24           | 18.62                   | 19.46                    |
| 775.00  | 0.23           | 18.89                   | 19.85                    |
| 800.00  | 0.22           | 19.16                   | 20.27                    |
| 825.00  | 0.21           | 19.42                   | 20.73                    |
| 850.00  | 0.20           | 19.67                   | 21.13                    |
| 875.00  | 0.19           | 19.91                   | 21.50                    |
| 900.00  | 0.18           | 20.12                   | 21.82                    |
| 925.00  | 0.17           | 20.31                   | 22.09                    |
| 950.00  | 0.17           | 20.49                   | 22.36                    |
| 975.00  | 0.17           | 20.65                   | 22.57                    |
| 1000.00 | 0.17           | 20.77                   | 22.65                    |
| 1025.00 | 0.17           | 20.85                   | 22.56                    |
| 1050.00 | 0.17           | 20.88                   | 22.37                    |
| 1100.00 | 0.18           | 20.84                   | 21.89                    |
| 1150.00 | 0.19           | 20.69                   | 21.17                    |
| 1200.00 | 0.21           | 20.38                   | 20.35                    |
| 1250.00 | 0.23           | 19.96                   | 19.67                    |
| 1300.00 | 0.25           | 19.49                   | 18.98                    |
| 1350.00 | 0.26           | 18.96                   | 18.36                    |
| 1400.00 | 0.27           | 18.42                   | 17.89                    |
| 1450.00 | 0.27           | 17.88                   | 17.43                    |
| 1500.00 | 0.27           | 17.34                   | 17.04                    |
| 1600.00 | 0.26           | 16.41                   | 16.49                    |
| 1700.00 | 0.24           | 15.65                   | 16.13                    |
| 1800.00 | 0.24           | 15.13                   | 15.93                    |
| 1900.00 | 0.24           | 14.84                   | 15.88                    |
| 2000.00 | 0.27           | 14.84                   | 15.93                    |
| 2050.00 | 0.29           | 14.90                   | 16.02                    |
| 2100.00 | 0.31           | 15.02                   | 16.16                    |
| 2150.00 | 0.33           | 15.23                   | 16.27                    |
| 2200.00 | 0.35           | 15.51                   | 16.45                    |
| 2250.00 | 0.37           | 15.83                   | 16.74                    |
| 2300.00 | 0.38           | 16.23                   | 17.01                    |

## Typical Performance Curves

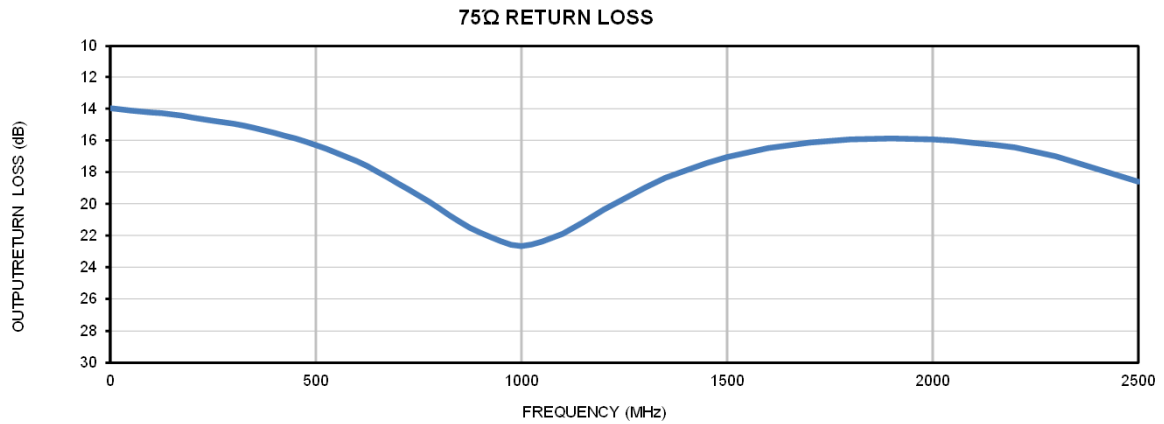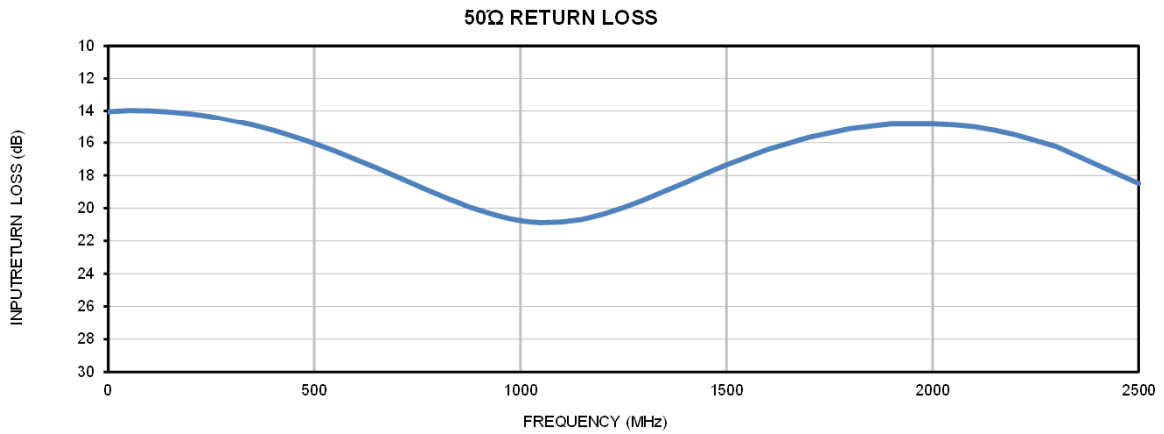

## Outline Dimensions

FF1891

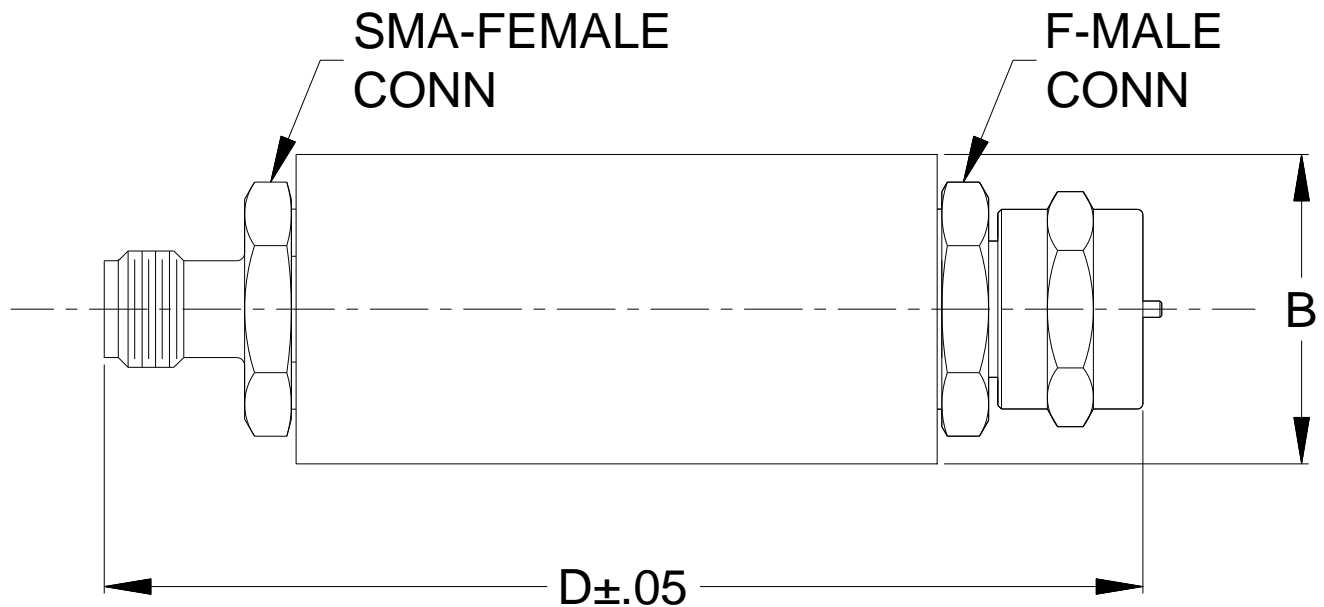

| CASE#  | A  | B       | C  | D       | E  | WT GRAMS |
|--------|----|---------|----|---------|----|----------|
| FF1891 | -- | .67     | -- | 2.22    | -- | 35       |
|        | -- | (17.02) | -- | (56.39) | -- |          |

Dimensions are in inches (mm). Tolerances: 2Pl.  $\pm .03$ ; 3Pl.  $\pm .015$

### Notes:

1. Case material: Brass.
2. Case finish: Nickel plate.



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

| <b>Specification</b>       | <b>Test/Inspection Condition</b>   | <b>Reference/Spec</b>                |
|----------------------------|--|--------------------------------------|
| Operating Temperature      | -55° to 100°C<br>Ambient Environment   | Individual Model Data Sheet          |
| Storage Temperature        | -55° to 100° C<br>Ambient Environment  | Individual Model Data Sheet          |
| Barometric Pressure        | 100,000 Feet   | MIL-STD-202, Method 105, Condition D |
| Humidity                   | 90% RH, 65°C<br>Units may require bake-out after humidity to restore full performance. | MIL-STD-202, Method 103              |
| Thermal Shock              | -65° to 125°C, 5 cycles  | MIL-STD-202, Method 107, Condition B |
| Vibration (High Frequency) | 20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)    | MIL-STD-202, Method 204, Condition D |
| Mechanical Shock           | 100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)                          | MIL-STD-202, Method 213, Condition I |