Ceramic Surface Mount

Frequency Mixer WIDE BAND

SIM-24MH+

Level 13 (LO Power +13 dBm) 7300 to 20000 MHz

Generic photo used for illustration purposes only

CASE STYLE: HV1195

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	10, 20, 50, 100, 200, 500

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW

For extended temperature range, consult factory.

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

LO	8
RF	4
IF	2
GROUND	1,3,5,6,7

Features

- wide bandwidth, 7300 to 20000 MHz
- low conversion loss, 5.7 dB typ.
- high L-R isolation, 36 dB typ.
- excellent IF BW, DC to 7500 MHz
- LTCC double balanced mixer
- tiny size, low profile, 0.08"
- useable as up and down converter
- aqueous washable
- protected under U.S Patent 7,027,795

Applications

- fixed satellite
- mobile
- radio location

Outline Drawing

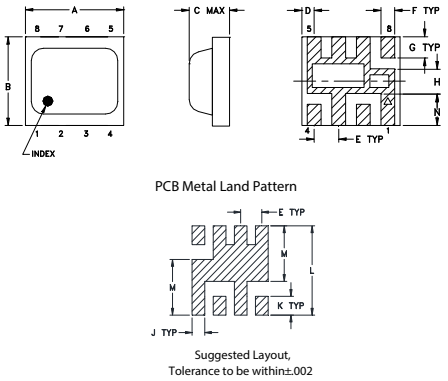

Outline Dimensions (inch / mm)

A	B	C	D	E	F	G
.200	.180	.087	.025	.050	.028	.043
5.08	4.57	2.2098	0.64	1.27	0.71	1.09

H	J	K	L	M	N	wt
.050	.030	.043	.204	.127	0.065	grams
1.27	0.76	1.09	5.18	3.23	1.65	0.08

Demo Board MCL P/N: TB-458+
Suggested PCB Layout (PL-284)

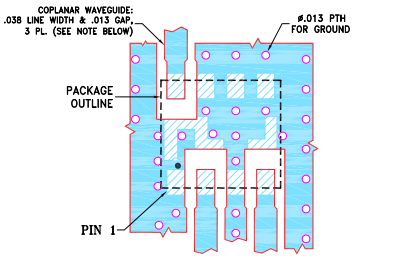

NOTES:
1. TRACE WIDTH AND GAP ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020±.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS* (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
LO/RF f_{L-f_U}	IF	Typ.	σ	Max.	Typ.	Min.	Typ.	Min.	Typ.
7300-20000	**DC-7500**								
7300-10000		7.0	0.2	8.5	43	31	19	13	20
10000-14500		5.7	0.1	7.5	36	29	18	13	16
14500-18000		7.6	0.3	9.3	26	19	15	10	18
18000-20000		8.5	0.3	10.9	28	22	25	16	25

1 dB COMPR. +9 dBm typ.

* Conversion loss at 30 MHz IF. σ is a measure of repeatability from unit to unit.

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +13dBm	LO +13dBm	LO +13dBm	LO +13dBm	LO +13dBm
7300.00	7330.10	6.65	43.77	18.89	3.94	6.09
7500.00	7530.10	6.32	39.57	19.63	3.47	8.37
8000.00	8030.10	6.12	35.84	20.35	2.76	4.99
9000.00	9030.10	7.38	48.14	19.20	4.81	2.76
9500.00	9530.10	7.00	48.23	17.30	3.84	2.56
10000.00	10030.10	6.73	45.78	16.83	3.38	2.62
10500.00	10530.10	6.29	42.22	17.92	3.17	3.22
11000.00	11030.10	5.93	40.36	19.17	2.35	2.25
12000.00	12030.10	5.84	35.97	18.67	1.99	3.49
12500.00	12530.10	5.55	34.02	18.08	1.92	2.31
13000.00	13030.10	5.70	33.28	18.18	1.48	2.28
14000.00	14030.10	5.74	34.81	19.35	1.87	2.77
14500.00	14530.10	6.21	36.04	21.54	2.52	3.07
15000.00	15030.10	6.80	35.11	28.80	2.98	4.28
15500.00	15530.10	6.92	31.74	22.63	2.49	3.20
16000.00	16030.10	7.08	27.52	16.03	2.47	2.97
17000.00	17030.10	7.94	26.56	15.86	4.43	1.25
18000.00	18030.10	8.16	29.19	24.93	2.49	1.99
19000.00	19030.10	7.75	31.50	28.10	3.12	2.04
20000.00	20030.10	9.60	26.59	22.49	2.54	1.27

Electrical Schematic

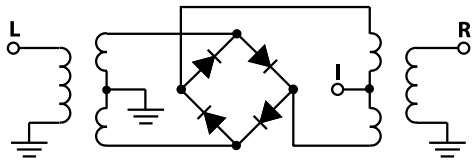

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

SIM-24MH+
CONVERSION LOSS

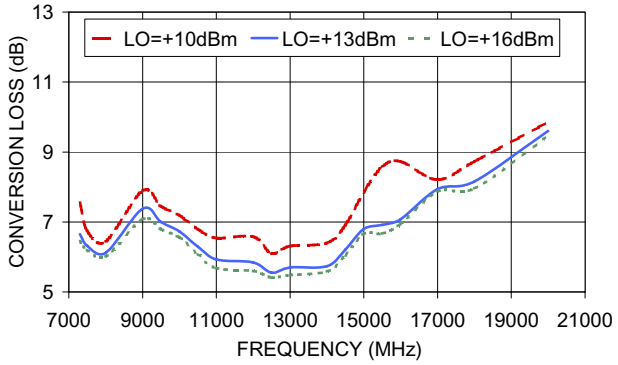

SIM-24MH+
CONVERSION LOSS VARIABLE IF

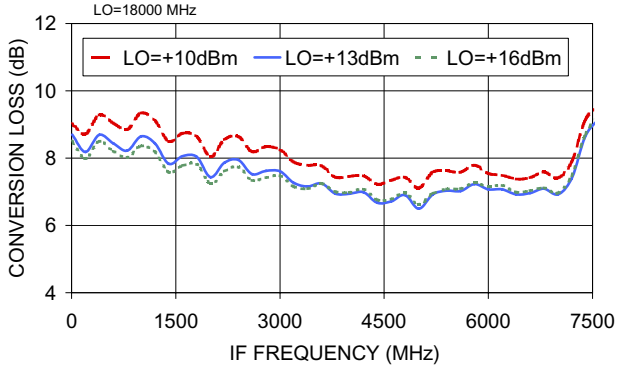

SIM-24MH+
L-R ISOLATION

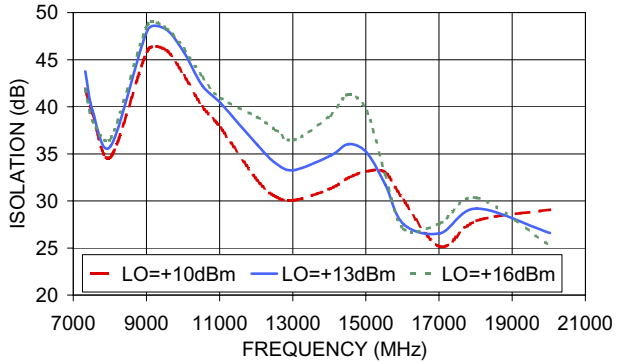

SIM-24MH+
L-I ISOLATION

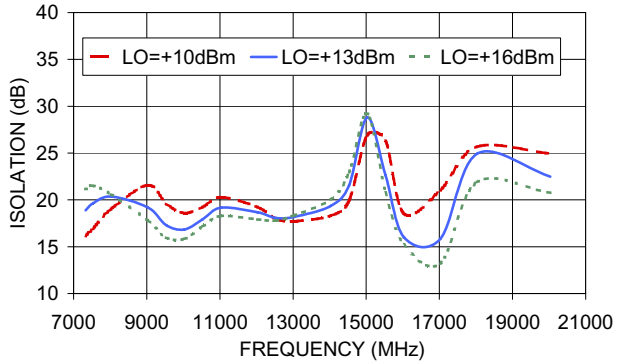

SIM-24MH+
LO VSWR

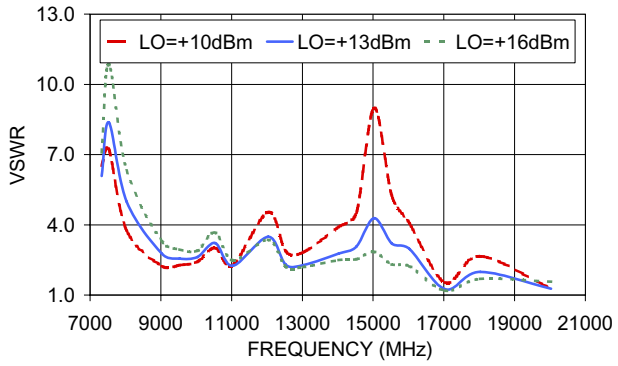

SIM-24MH+
RF VSWR

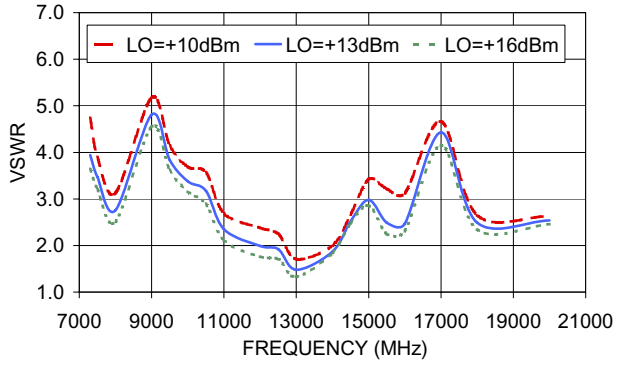

SIM-24MH+
IF VSWR

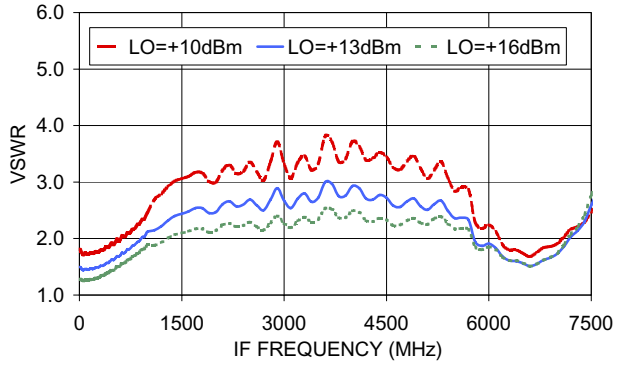

SIM-24MH+
IP3

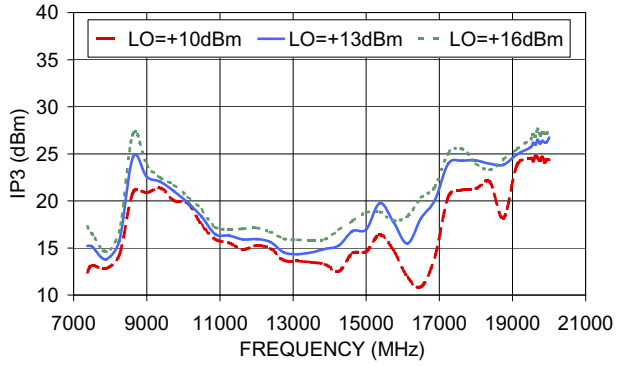

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Frequency Mixer SIM-24MH+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB) @LO (dBm)		
		+10	+13	+16
7020.0	7050.0	11.26	7.15	6.57
7080.0	7110.0	8.25	6.70	6.39
7140.0	7170.0	8.54	6.70	6.36
7180.0	7210.0	7.70	6.68	6.43
7540.0	7570.0	6.78	6.36	6.18
7900.0	7930.0	6.88	6.49	6.27
8260.0	8290.0	7.85	7.34	6.94
8620.0	8650.0	8.38	7.61	7.13
8980.0	9010.0	8.58	8.00	7.63
9340.0	9370.0	7.67	7.13	6.84
9700.0	9730.0	7.08	6.50	6.26
10060.0	10090.0	6.96	6.29	6.03
10420.0	10450.0	6.78	6.15	5.86
10780.0	10810.0	6.52	5.95	5.67
11140.0	11170.0	6.52	5.83	5.55
11500.0	11530.0	6.61	5.83	5.46
11860.0	11890.0	6.31	5.62	5.36
12220.0	12250.0	6.42	5.67	5.34
12580.0	12610.0	6.40	5.68	5.37
12940.0	12970.0	6.67	5.99	5.66
13300.0	13330.0	6.46	5.83	5.55
13660.0	13690.0	6.75	6.03	5.77
14020.0	14050.0	7.37	6.43	6.14
14380.0	14410.0	7.57	6.75	6.51
14740.0	14770.0	8.08	6.86	6.58
15100.0	15130.0	9.05	7.26	6.95
15460.0	15490.0	9.52	8.21	7.91
15800.0	15830.0	10.23	8.50	8.15
16160.0	16190.0	10.25	8.49	8.01
16500.0	16530.0	10.34	8.40	7.69
16860.0	16890.0	8.76	8.24	7.98
17200.0	17230.0	8.31	7.88	7.68
17560.0	17590.0	8.64	8.18	7.96
17900.0	17930.0	8.41	7.78	7.55
18260.0	18290.0	8.37	7.85	7.59
18600.0	18630.0	8.97	8.36	8.10
18960.0	18990.0	8.49	8.10	7.88
19300.0	19330.0	8.98	8.65	8.41
19660.0	19690.0	9.88	9.59	9.37
20000.0	20030.0	10.42	10.12	9.90

RF (IN) (MHz)	LO (MHz)	IP-3 INPUT (dBm) @LO (dBm)		
		+10	+13	+16
7020.0	7050.0	7.42	12.10	15.54
7080.0	7110.0	9.68	13.38	16.26
7140.0	7170.0	9.30	13.16	15.85
7180.0	7210.0	10.65	14.29	16.80
7540.0	7570.0	12.87	15.06	16.98
7900.0	7930.0	13.58	14.96	16.26
8260.0	8290.0	19.00	20.08	20.55
8620.0	8650.0	19.70	21.66	23.15
8980.0	9010.0	17.20	17.69	18.67
9340.0	9370.0	19.50	19.64	19.55
9700.0	9730.0	19.14	19.60	19.85
10060.0	10090.0	18.58	18.72	19.41
10420.0	10450.0	17.30	17.71	18.55
10780.0	10810.0	16.38	16.87	17.51
11140.0	11170.0	15.43	16.13	16.58
11500.0	11530.0	14.88	15.42	16.37
11860.0	11890.0	14.63	15.15	16.22
12220.0	12250.0	14.51	14.92	16.34
12580.0	12610.0	13.56	14.23	15.76
12940.0	12970.0	14.09	14.26	16.38
13300.0	13330.0	14.28	14.62	16.10
13660.0	13690.0	13.31	14.59	16.19
14020.0	14050.0	12.81	15.32	17.11
14380.0	14410.0	14.66	17.14	18.04
14740.0	14770.0	14.76	17.69	18.12
15100.0	15130.0	14.76	17.20	18.07
15460.0	15490.0	14.09	16.90	20.46
15800.0	15830.0	12.54	19.01	22.55
16160.0	16190.0	14.14	21.84	24.29
16500.0	16530.0	14.89	26.50	23.01
16860.0	16890.0	17.60	23.02	22.62
17200.0	17230.0	20.98	23.69	25.73
17560.0	17590.0	22.12	23.46	23.01
17900.0	17930.0	18.26	23.18	22.06
18260.0	18290.0	20.40	24.83	23.61
18600.0	18630.0	19.04	25.79	26.98
18960.0	18990.0	22.72	23.65	24.02
19300.0	19330.0	24.75	26.38	27.32
19660.0	19690.0	23.75	24.51	24.18
20000.0	20030.0	30.79	30.94	31.05

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+9dBm (dB) @LO (dBm)		
		+10	+13	+16
7020.0	7050.0	0.04	2.01	0.92
7080.0	7110.0	2.26	1.81	0.85
7140.0	7170.0	2.70	1.56	0.74
7180.0	7210.0	2.70	1.56	0.74
7540.0	7570.0	2.97	1.35	0.62
7900.0	7930.0	2.15	0.94	0.52
8260.0	8290.0	1.48	0.95	0.69
8620.0	8650.0	0.94	0.64	0.48
8980.0	9010.0	0.69	0.59	0.46
9340.0	9370.0	0.64	0.48	0.40
9700.0	9730.0	0.82	0.56	0.46
10060.0	10090.0	0.79	0.56	0.45
10420.0	10450.0	0.91	0.58	0.45
10780.0	10810.0	0.97	0.61	0.45
11140.0	11170.0	1.21	0.59	0.43
11500.0	11530.0	1.14	0.57	0.39
11860.0	11890.0	1.18	0.67	0.48
12220.0	12250.0	1.24	0.68	0.45
12580.0	12610.0	1.51	0.80	0.55
12940.0	12970.0	0.98	0.52	0.38
13300.0	13330.0	1.19	0.59	0.44
13660.0	13690.0	1.30	0.52	0.37
14020.0	14050.0	1.22	0.50	0.38
14380.0	14410.0	1.06	0.45	0.32
14740.0	14770.0	0.94	0.49	0.41
15100.0	15130.0	0.61	0.55	0.47
15460.0	15490.0	0.78	0.52	0.42
15800.0	15830.0	0.68	0.57	0.35
16160.0	16190.0	0.63	0.54	0.26
16500.0	16530.0	0.41	0.28	0.24
16860.0	16890.0	1.17	0.43	0.37
17200.0	17230.0	0.98	0.39	0.27
17560.0	17590.0	0.57	0.24	0.17
17900.0	17930.0	0.82	0.26	0.19
18260.0	18290.0	0.47	0.20	0.17
18600.0	18630.0	0.86	0.24	0.20
18960.0	18990.0	0.41	0.21	0.19
19300.0	19330.0	0.36	0.23	0.19
19660.0	19690.0	0.27	0.19	0.16
20000.0	20030.0	0.37	0.16	0.14

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=13649.99MHz (dB) @LO (dBm) +13
7150.0	6500.0	13.22
6789.8	6860.2	7.29
6429.6	7220.3	5.95
6069.5	7580.5	6.23
5709.3	7940.7	6.62
5349.1	8300.9	6.55
4988.9	8661.1	6.79
4628.8	9021.2	7.45
4268.6	9381.4	8.13
3908.4	9741.6	8.26
3548.2	10101.8	7.52
3188.0	10461.9	7.38
2827.9	10822.1	6.98
2467.7	11182.3	6.63
2107.5	11542.5	6.39
1747.3	11902.7	6.11
1366.0	12284.0	6.18
1005.8	12644.2	6.13
624.4	13025.6	6.11
264.2	13385.7	5.88
104.1	13754.1	6.02
423.9	14073.9	5.92
762.5	14412.5	6.40
1082.3	14732.3	6.63
1421.0	15071.0	6.59
1740.8	15390.8	6.87
2079.4	15729.4	7.15
2399.3	16049.2	7.29
2737.9	16387.9	7.43
3057.7	16707.7	7.32
3396.4	17046.3	6.90
3716.2	17366.2	6.94
4054.8	17704.8	6.67
4374.6	18024.6	6.96
4713.3	18363.3	7.12
5033.1	18683.1	7.45
5371.7	19021.7	7.53
5691.5	19341.5	7.45
6030.2	19680.2	7.36
6350.0	20000.0	7.89

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=7299.9902MHz (dB) @LO (dBm) +13
10.0	7310.0	6.65
250.0	7550.0	6.40
490.0	7790.0	6.05
710.0	8010.0	5.75
950.0	8250.0	5.63
1170.0	8470.0	5.84
1410.0	8710.0	6.27
1630.0	8930.0	6.91
1870.0	9170.0	7.98
2090.0	9390.0	8.75
2330.0	9630.0	9.46
2550.0	9850.0	10.22
2790.0	10090.0	10.66
3010.0	10310.0	10.61
3250.0	10550.0	11.18
3470.0	10770.0	10.92
3710.0	11010.0	10.81
3930.0	11230.0	10.74
4170.0	11470.0	10.90
4390.0	11690.0	10.56
4630.0	11930.0	10.47
4850.0	12150.0	10.76
5090.0	12390.0	10.41
5310.0	12610.0	10.19
5550.0	12850.0	10.03
5770.0	13070.0	9.40
6010.0	13310.0	8.91
6230.0	13530.0	8.52
6470.0	13770.0	8.46
6690.0	13990.0	8.56
6930.0	14230.0	8.62
7150.0	14450.0	8.61
7390.0	14690.0	8.87
7610.0	14910.0	9.29
7850.0	15150.0	9.62
8070.0	15370.0	10.38
8310.0	15610.0	10.86
8530.0	15830.0	11.64
8770.0	16070.0	12.29
8990.0	16290.0	13.24

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=19999.99MHz (dB) @LO (dBm) +13
9310.0	10690.0	17.12
9070.0	10930.0	16.63
8830.0	11170.0	15.95
8590.0	11410.0	14.79
8350.0	11650.0	13.61
8110.0	11890.0	12.48
7870.0	12130.0	11.45
7630.0	12370.0	11.42
7390.0	12610.0	11.67
7150.0	12850.0	11.70
6910.0	13090.0	11.64
6670.0	13330.0	11.53
6430.0	13570.0	11.30
6190.0	13810.0	11.21
5950.0	14050.0	11.41
5710.0	14290.0	11.71
5470.0	14530.0	12.62
5230.0	14770.0	12.62
4990.0	15010.0	12.45
4750.0	15250.0	12.45
4510.0	15490.0	12.53
4270.0	15730.0	13.09
4030.0	15970.0	13.07
3790.0	16210.0	13.03
3550.0	16450.0	13.02
3310.0	16690.0	12.39
3070.0	16930.0	12.49
2830.0	17170.0	12.08
2590.0	17410.0	11.84
2350.0	17650.0	11.79
2110.0	17890.0	11.38
1870.0	18130.0	11.41
1630.0	18370.0	11.20
1390.0	18610.0	11.08
1150.0	18850.0	10.94
930.0	19070.0	10.76
690.0	19310.0	10.45
470.0	19530.0	10.29
230.0	19770.0	10.18
10.0	19990.0	10.03

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB) @LO (dBm)			LO-IF ISOLATION (dB) @LO (dBm)		
	+10	+13	+16	+10	+13	+16
7050.0	39.78	45.43	46.03	22.2	23.94	26.28
7110.0	43.04	45.42	45.73	20.26	22.56	24.81
7170.0	42.03	44.81	45.46	22.51	24.7	27.02
7210.0	42.20	44.12	44.62	21.06	23.53	25.70
7570.0	37.12	38.31	38.95	23.00	25.05	26.30
7930.0	34.42	34.98	34.81	25.00	26.20	26.36
8290.0	37.22	39.49	42.06	25.30	25.84	25.50
8650.0	38.70	39.37	39.99	26.66	25.43	24.69
9010.0	54.16	55.30	51.29	27.07	25.34	24.03
9370.0	46.23	45.96	44.65	26.98	25.04	23.59
9730.0	48.40	48.30	46.87	25.30	22.88	21.79
10090.0	59.20	50.53	45.87	23.90	21.67	20.58
10450.0	53.99	51.67	45.35	23.79	22.27	21.26
10810.0	44.84	46.78	44.33	24.28	23.46	22.42
11170.0	37.76	40.71	41.98	25.19	24.16	23.63
11530.0	33.69	36.26	38.26	25.56	25.12	24.38
11890.0	31.59	34.22	36.17	23.72	23.22	22.61
12250.0	30.54	33.29	35.43	20.85	20.51	19.74
12610.0	29.95	33.07	36.40	19.05	19.13	18.87
12970.0	29.51	32.60	35.53	20.40	20.87	20.74
13330.0	29.54	32.53	35.08	21.15	21.63	21.80
13690.0	31.77	33.92	34.74	22.12	22.80	23.31
14050.0	36.72	35.32	33.61	25.07	26.80	28.45
14410.0	39.17	32.62	29.33	28.09	29.12	29.73
14770.0	33.33	29.57	27.12	30.34	29.45	28.84
15130.0	27.46	26.70	25.07	27.50	25.85	24.95
15490.0	23.40	23.56	22.52	21.54	21.37	21.00
15830.0	20.23	21.75	21.31	22.25	22.05	22.20
16190.0	22.05	22.79	21.68	19.99	19.93	19.86
16530.0	27.46	24.54	22.87	22.25	21.37	20.71
16890.0	25.82	25.18	24.65	23.36	21.37	20.04
17230.0	23.75	24.50	24.48	24.61	21.56	19.11
17590.0	23.94	24.85	25.19	29.38	27.11	25.06
17930.0	23.80	24.45	25.43	31.34	29.07	27.19
18290.0	23.95	25.01	25.95	33.54	32.26	30.49
18630.0	24.32	24.76	25.20	40.21	39.87	38.44
18990.0	25.28	26.31	26.97	32.18	31.49	30.21
19330.0	27.73	30.11	31.56	32.59	31.76	30.37
19690.0	32.77	36.85	37.84	33.33	32.90	31.94
20030.0	31.50	30.84	29.44	39.69	39.35	38.90

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB) @LO (dBm)		
		+10	+13	+16
7020.0	7050.0	19.06	21.69	22.07
7080.0	7110.0	20.33	20.97	21.05
7140.0	7170.0	20.03	20.58	20.74
7180.0	7210.0	20.56	20.80	20.74
7540.0	7570.0	21.21	20.80	20.02
7900.0	7930.0	18.73	18.25	17.74
8260.0	8290.0	17.51	17.80	18.13
8620.0	8650.0	22.18	22.42	22.52
8980.0	9010.0	26.07	26.13	25.95
9340.0	9370.0	26.69	26.50	26.18
9700.0	9730.0	28.21	27.71	27.34
10060.0	10090.0	30.09	29.23	28.66
10420.0	10450.0	32.28	31.30	30.55
10780.0	10810.0	34.68	33.69	32.52
11140.0	11170.0	34.62	34.13	33.18
11500.0	11530.0	33.70	34.06	33.58
11860.0	11890.0	31.32	31.88	31.74
12220.0	12250.0	29.16	29.68	29.70
12580.0	12610.0	27.72	28.57	28.78
12940.0	12970.0	26.84	27.54	27.53
13300.0	13330.0	25.57	26.35	26.59
13660.0	13690.0	27.13	29.28	30.00
14020.0	14050.0	33.29	40.51	40.14
14380.0	14410.0	44.72	37.73	32.77
14740.0	14770.0	43.57	34.69	30.90
15100.0	15130.0	39.19	36.39	29.71
15460.0	15490.0	31.29	32.10	27.65
15800.0	15830.0	27.01	26.55	25.05
16160.0	16190.0	25.02	26.09	27.20
16500.0	16530.0	28.33	30.20	33.15
16860.0	16890.0	27.33	27.27	27.15
17200.0	17230.0	26.64	26.82	27.02
17560.0	17590.0	25.02	24.99	24.75
17900.0	17930.0	26.16	26.28	26.57
18260.0	18290.0	20.51	20.50	20.84
18600.0	18630.0	22.37	22.41	23.53
18960.0	18990.0	19.35	19.32	20.21
19300.0	19330.0	18.23	18.36	18.68
19660.0	19690.0	18.22	18.41	18.47
20000.0	20030.0	18.46	18.68	19.23

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1) @LO (dBm)		
		+10	+13	+16
7020.0	7050.0	5.66	3.65	3.21
7080.0	7110.0	4.25	3.34	3.05
7140.0	7170.0	4.38	3.43	3.09
7180.0	7210.0	3.86	3.26	3.00
7540.0	7570.0	3.47	3.11	2.94
7900.0	7930.0	3.41	3.06	2.87
8260.0	8290.0	3.62	3.45	3.30
8620.0	8650.0	4.56	4.28	3.94
8980.0	9010.0	5.83	5.36	5.20
9340.0	9370.0	4.82	4.39	4.07
9700.0	9730.0	4.22	3.78	3.42
10060.0	10090.0	4.99	4.30	3.99
10420.0	10450.0	4.36	3.68	3.34
10780.0	10810.0	2.74	2.44	2.01
11140.0	11170.0	3.27	2.71	2.46
11500.0	11530.0	3.10	2.57	2.29
11860.0	11890.0	2.13	1.79	1.55
12220.0	12250.0	2.13	1.79	1.57
12580.0	12610.0	1.93	1.62	1.41
12940.0	12970.0	1.52	1.39	1.36
13300.0	13330.0	1.99	1.80	1.87
13660.0	13690.0	1.74	1.52	1.39
14020.0	14050.0	1.57	1.62	1.65
14380.0	14410.0	2.39	2.39	2.86
14740.0	14770.0	2.97	2.64	2.58
15100.0	15130.0	2.70	2.45	2.22
15460.0	15490.0	3.30	3.12	3.45
15800.0	15830.0	4.89	4.12	3.69
16160.0	16190.0	2.42	2.07	1.90
16500.0	16530.0	3.13	3.20	3.26
16860.0	16890.0	5.14	5.00	5.63
17200.0	17230.0	3.49	3.29	2.84
17560.0	17590.0	3.00	3.00	2.59
17900.0	17930.0	4.24	3.94	4.26
18260.0	18290.0	3.86	3.54	3.23
18600.0	18630.0	2.75	2.52	2.35
18960.0	18990.0	3.47	3.37	2.95
19300.0	19330.0	3.00	2.83	2.84
19660.0	19690.0	2.90	2.89	2.75
20000.0	20030.0	5.17	4.68	6.13

LO (MHz)	LO VSWR (:1) @LO (dBm)		
	+10	+13	+16
7050.0	12.35	8.16	8.31
7110.0	9.04	7.44	8.05
7170.0	8.51	7.00	7.56
7210.0	7.14	6.73	7.56
7570.0	4.28	4.96	5.93
7930.0	3.18	4.00	4.86
8290.0	2.54	3.31	4.13
8650.0	2.38	3.03	3.74
9010.0	2.31	2.74	3.25
9370.0	2.17	2.39	2.72
9730.0	2.13	2.27	2.56
10090.0	2.22	2.36	2.69
10450.0	2.42	2.48	2.74
10810.0	2.57	2.55	2.75
11170.0	2.83	2.65	2.82
11530.0	3.19	2.84	2.91
11890.0	3.42	2.94	2.92
12250.0	3.40	2.80	2.67
12610.0	3.33	2.64	2.47
12970.0	3.38	2.66	2.50
13330.0	3.58	2.71	2.48
13690.0	3.70	2.71	2.43
14050.0	4.45	2.95	2.47
14410.0	5.13	3.30	2.67
14770.0	5.74	3.45	2.60
15130.0	5.14	3.27	2.39
15490.0	3.76	2.65	1.99
15830.0	3.62	2.63	1.97
16190.0	3.20	2.31	1.70
16530.0	2.82	2.16	1.58
16890.0	1.95	1.55	1.36
17230.0	1.98	1.58	1.45
17590.0	2.05	1.71	1.72
17930.0	2.87	2.20	2.03
18290.0	2.89	2.16	1.91
18630.0	3.25	2.18	1.71
18990.0	2.28	1.60	1.24
19330.0	1.76	1.25	1.08
19690.0	1.14	1.20	1.54
20030.0	1.43	1.56	1.87

IF (OUT) (MHz)	IF VSWR @LO=20029.99MHz (:1) @LO (dBm)		
	+10	+13	+16
10.0	1.42	1.24	1.08
230.0	1.48	1.30	1.15
450.0	1.65	1.45	1.28
670.0	1.87	1.66	1.48
890.0	2.04	1.81	1.62
1110.0	2.20	1.95	1.73
1330.0	2.36	2.09	1.85
1550.0	2.45	2.16	1.91
1770.0	2.46	2.16	1.90
1990.0	2.46	2.15	1.88
2210.0	2.54	2.21	1.94
2430.0	2.59	2.26	1.99
2650.0	2.65	2.31	2.04
2870.0	2.76	2.40	2.12
3090.0	2.92	2.54	2.24
3310.0	3.02	2.62	2.32
3530.0	3.12	2.71	2.39
3750.0	3.29	2.84	2.52
3970.0	3.45	2.98	2.66
4190.0	3.58	3.11	2.78
4410.0	3.60	3.15	2.83
4630.0	3.56	3.15	2.85
4830.0	3.56	3.16	2.89
5050.0	3.42	3.05	2.84
5250.0	3.19	2.86	2.72
5470.0	3.03	2.76	2.67
5670.0	3.00	2.77	2.74
5890.0	2.85	2.68	2.68
6090.0	2.69	2.56	2.55
6310.0	2.63	2.50	2.47
6510.0	2.51	2.37	2.31
6730.0	2.48	2.34	2.29
6930.0	2.69	2.55	2.47
7150.0	2.72	2.55	2.44
7350.0	2.55	2.40	2.34
7570.0	2.30	2.23	2.24
7770.0	2.15	2.18	2.32
7990.0	2.18	2.32	2.54
8190.0	2.53	2.76	3.06
8410.0	3.16	3.49	3.86

Typical Performance Curves

Conversion Loss @ IF=30MHz

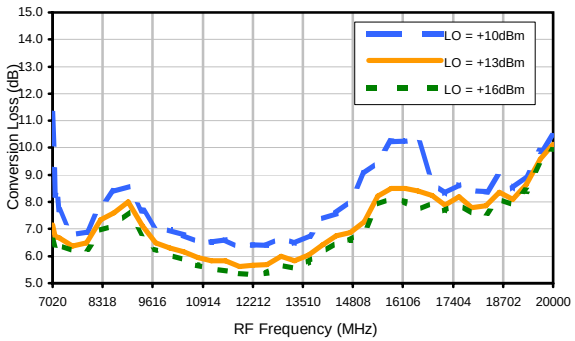

Conversion Loss vs. LO @ RF=13649.99MHz

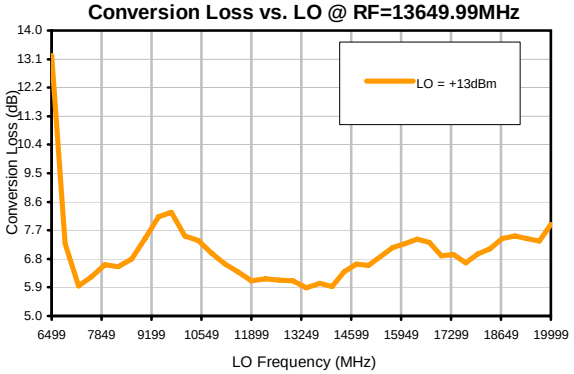

Conversion Loss vs. IF @ RF=13649.99MHz

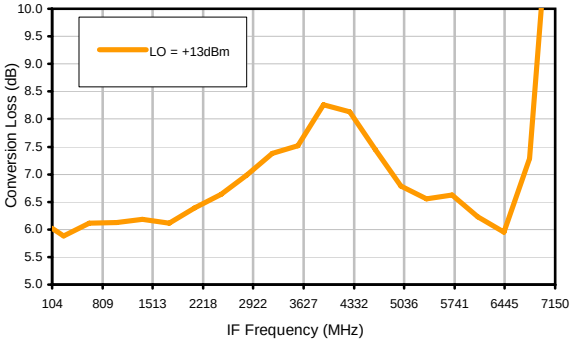

Conversion Loss vs. IF @ RF=7299.9902MHz

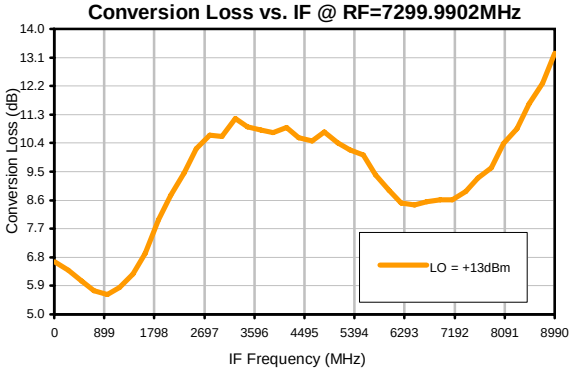

Conversion Loss vs. IF @ RF=19999.99MHz

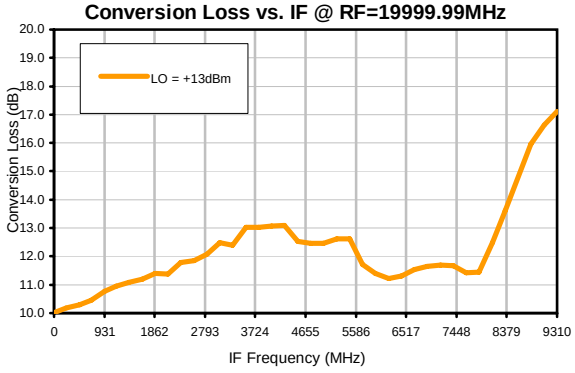

IP-3 Input

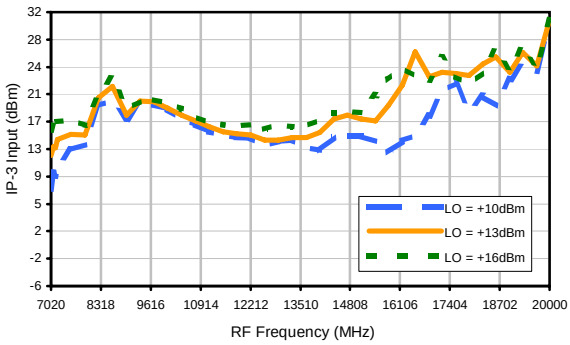

Compression @ RF IN=+9dBm

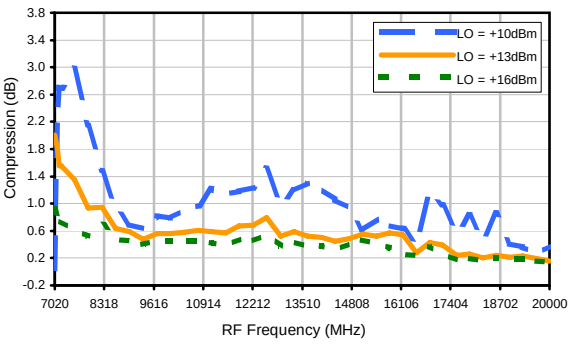

Typical Performance Curves

LO-RF Isolation

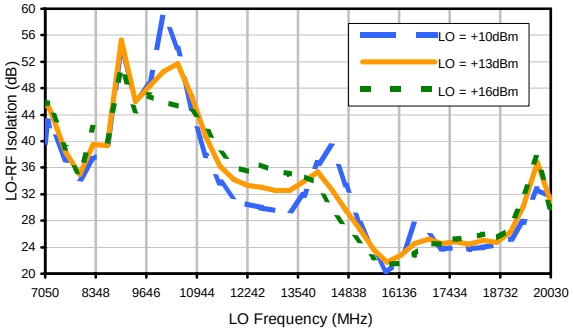

LO-IF Isolation

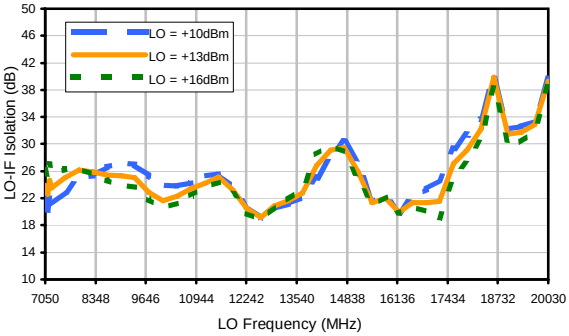

RF-IF Isolation

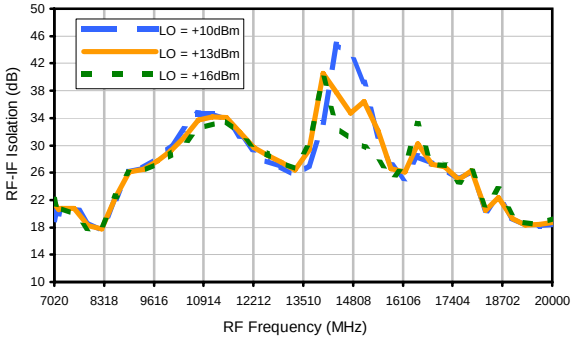

RF VSWR

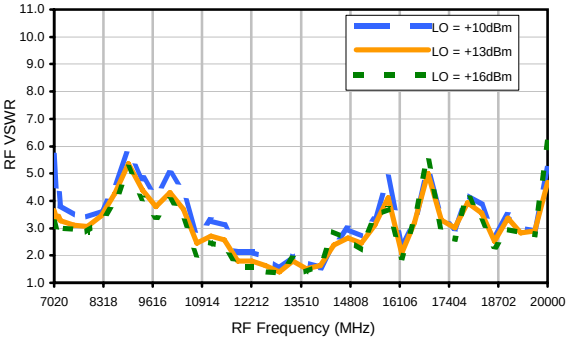

LO VSWR

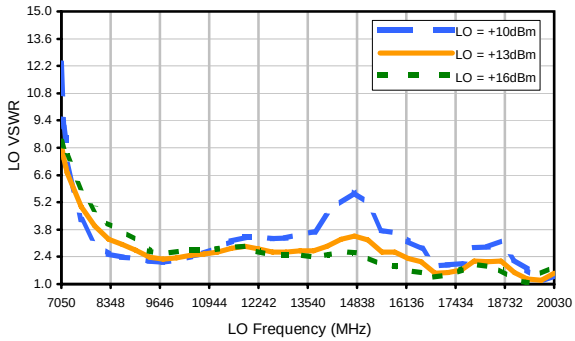

IF VSWR

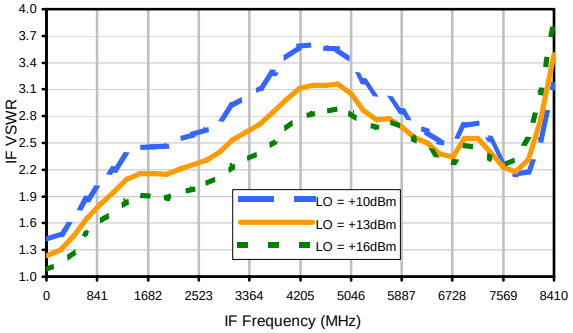

Case Style HV

Outline Dimensions

HV1195

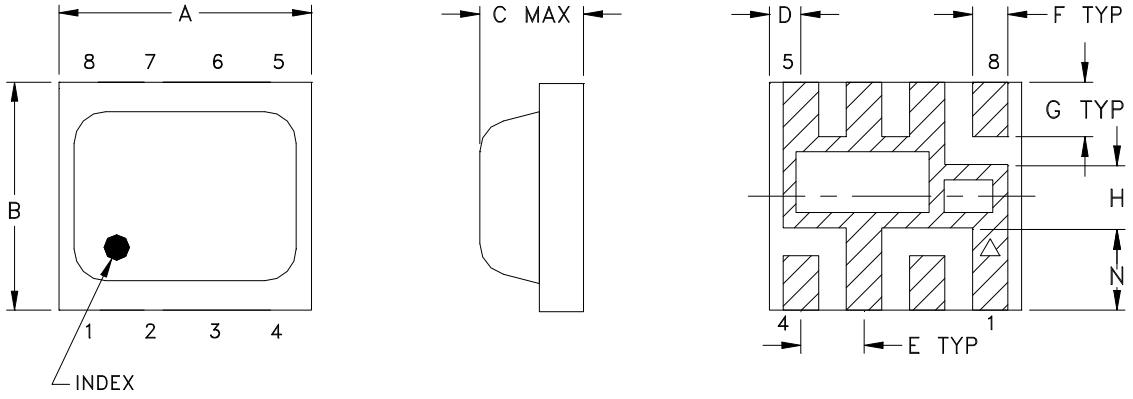

PCB Metal Land Pattern

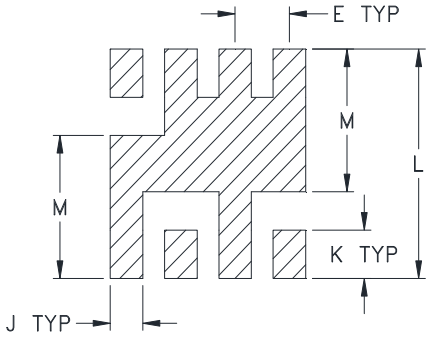

Suggested Layout,
Tolerance to be within ±.002

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N
HV1195	0.200 (5.08)	0.180 (4.57)	0.087 (2.21)	0.025 (0.64)	0.050 (1.27)	0.028 (0.71)	0.043 (1.09)	0.050 (1.27)	0.030 (0.76)	0.043 (1.09)	0.204 (5.18)	0.127 (3.23)	0.065 (1.65)

CASE#	WT, GRAM
HV1195	.08

Dimensions are in inches (mm). Tolerances: 2 Pl. ± .01; 3 Pl. ± .005

Notes:

1. Case material: Plastic encapsulation on Ceramic base.
2. Termination finish: Palladium Silver.

Tape & Reel Packaging TR-F82

DEVICE ORIENTATION IN T&R

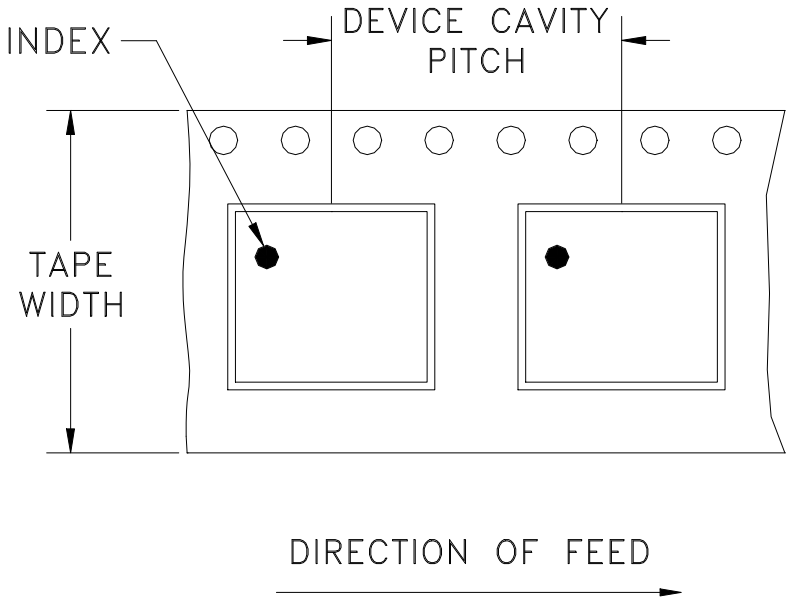

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel
12	8	7	500

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf

Mini-Circuits®
INTERNET http://www.minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

THIRD ANGLE PROJECTION

REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M116031	NEW RELEASE	02/14/08	MMG	DJ
A	ECO-000060	MODIFIED CASE STYLE	10/16/19	ITG	RB

SUGGESTED MOUNTING CONFIGURATION FOR HV1195 CASE STYLE, "08MX05" PIN CODE

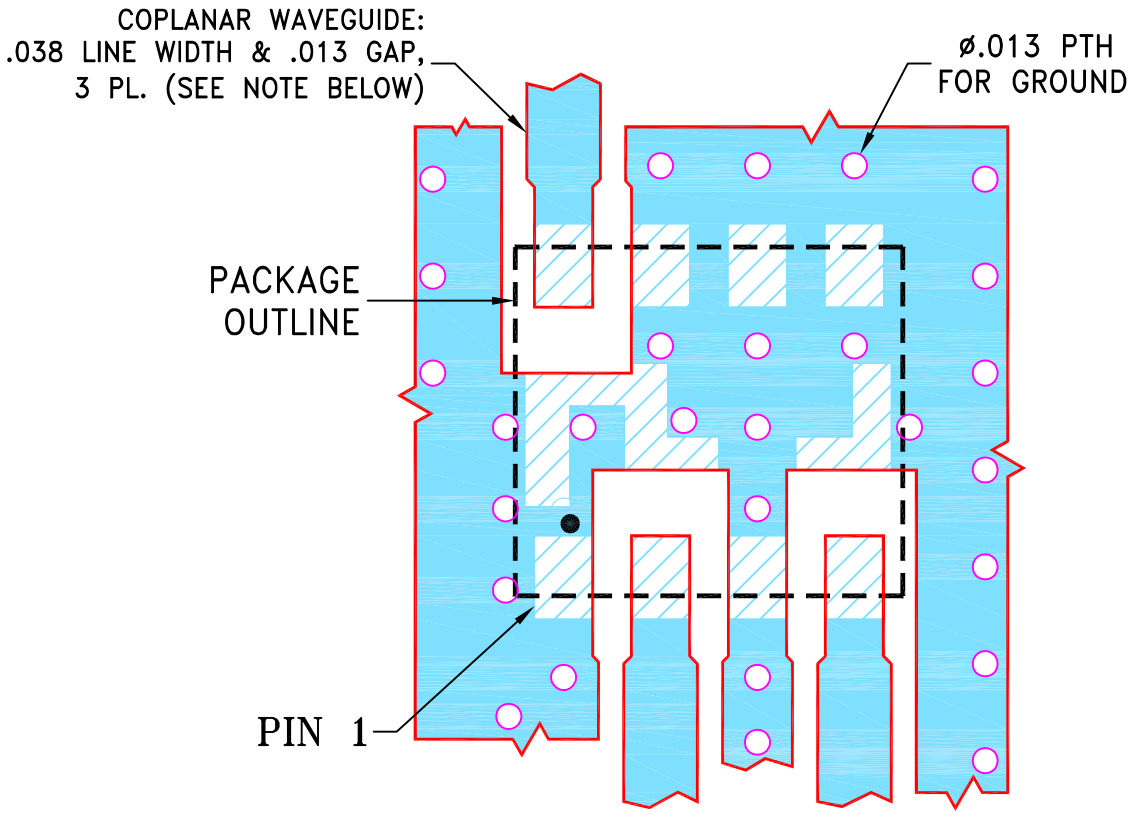

NOTES:

1. TRACE WIDTH AND GAP ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020±.0015"; COPPER: 1/2 OZ. EACH SIDE.
   FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE
DIMENSIONS ARE IN INCHES	DRAWN	MMG	02/13/08
TOLERANCES ON:	CHECKED	AV	02/14/08
2 PL DECIMALS ±	APPROVED	DJ	02/14/08
3 PL DECIMALS ± .005			
ANGLES ±			
FRACTIONS ±			

ASHEETA1.DWG REV:A DATE:01/12/95

Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235

PL, 08MX05, HV1195, SIM, TB-458+

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-284	A

FILE:	SCALE:	SHEET:
98PL284	10:1	1 OF 1

Evaluation Board and Circuit

For Pin Connections refer to Data Sheet of the DUT

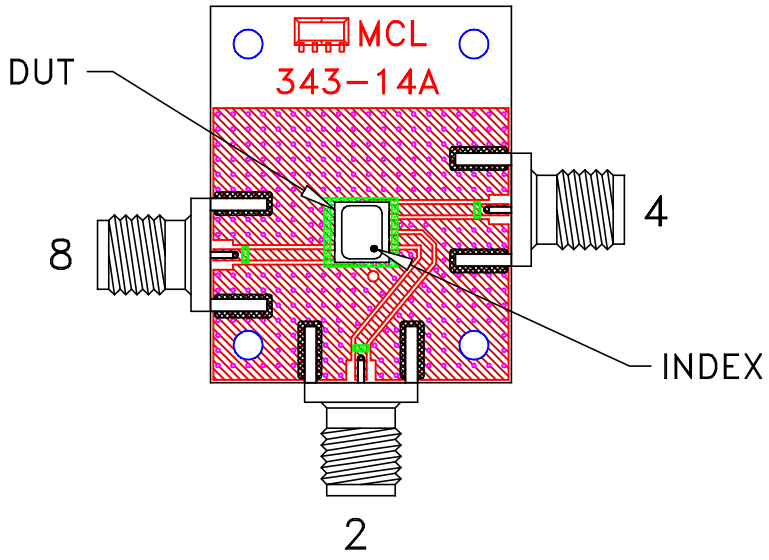

TB-458+

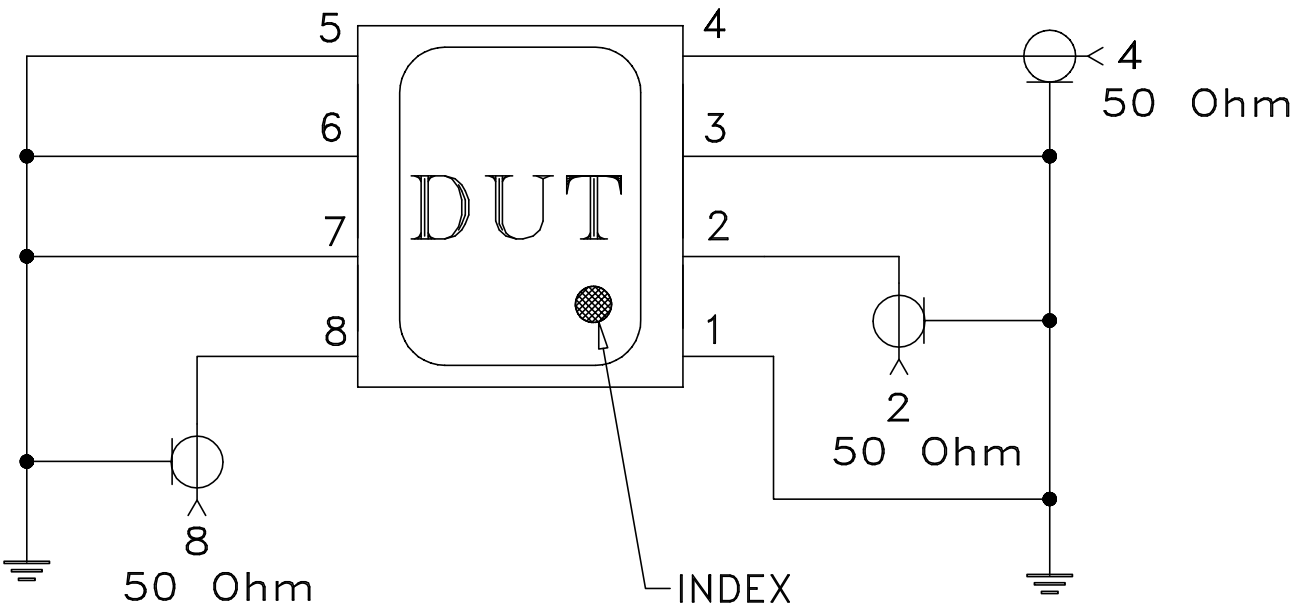

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers RO4350 or equivalent, Dielectric Constant=3.5, Thickness=.020 inch.

Mini-Circuits®

Mini-Circuits

Environmental Specifications ENV10T1

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85° C Case Temperature	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Autoclave	15 psig, 100% RH, 121°C, 96 hours	JESD22-A102-C, Condition C
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutectic Process: 225°C peak Pb-Free Process: 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2; Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215