






**SVA-2000+  
ATTENUATION Vs. FREQUENCY  
OVER CONTROL VOLTAGES**

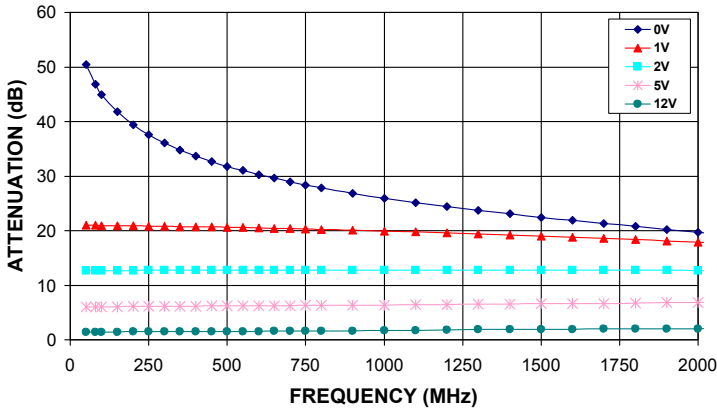


**SVA-2000+  
ATTENUATION Vs. INPUT POWER  
OVER CONTROL VOLTAGES AT 1000MHz**

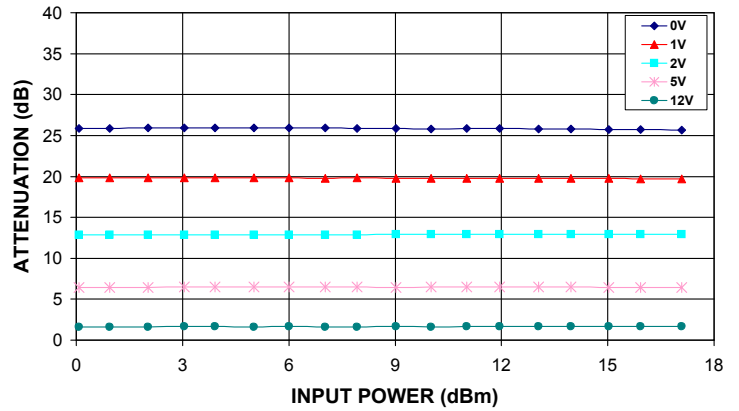


**SVA-2000+  
INPUT RETURN LOSS Vs. FREQUENCY  
OVER CONTROL VOLTAGES**

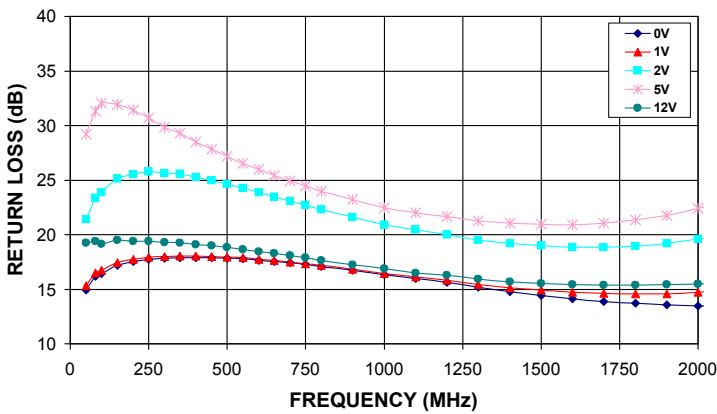


**SVA-2000+  
OUTPUT RETURN LOSS Vs. FREQUENCY  
OVER CONTROL VOLTAGES**

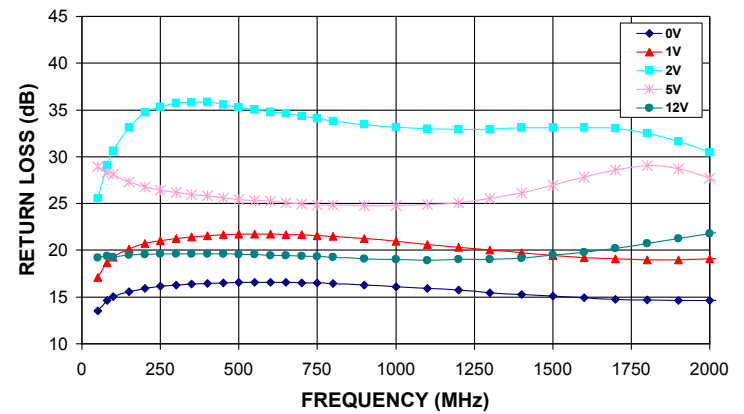

**SVA-2000+  
IP3 Vs. FREQUENCY  
OVER CONTROL VOLTAGES**

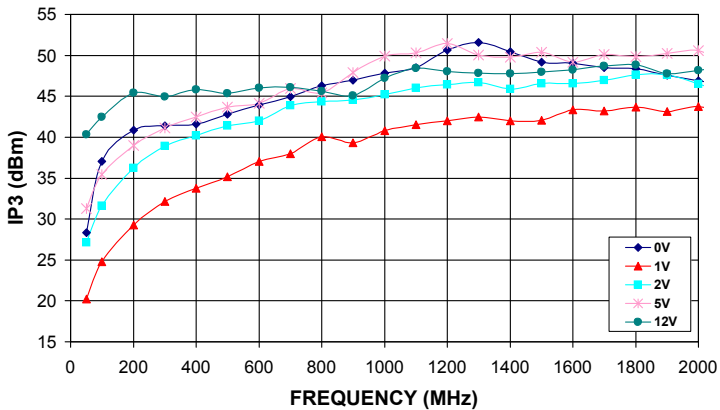

**SVA-2000+  
PHASE SHIFT Vs. FREQUENCY  
OVER CONTROL VOLTAGES**

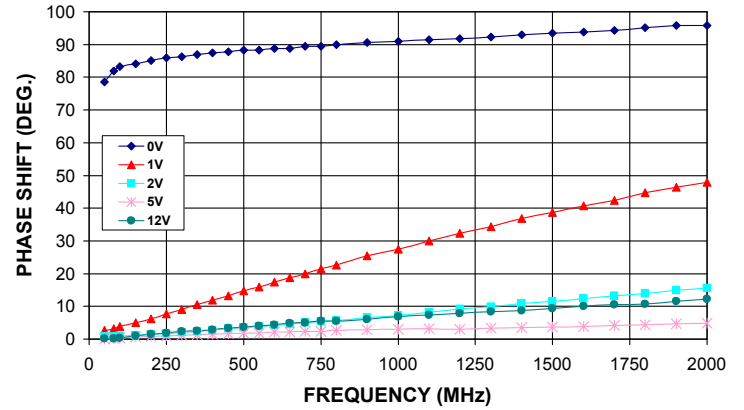

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Voltage Variable Attenuator

# SVA-2000+

## Typical Performance Data

V CONTROL (V)	ATTENUATION @ 1000 MHz (dB) @V+=5V
0.0	25.90
1.0	19.90
2.0	12.80
3.0	9.71
4.0	7.80
5.0	6.38
6.0	5.19
7.0	4.11
8.0	3.12
9.0	2.39
10.0	1.91
11.0	1.76
12.0	1.68

FREQ. (MHz)	ATTENUATION Vs. V CONTROL @ V+=5V (dB)				
	@V Control=0V	@V Control=1V	@V Control=2V	@V Control=5V	@V Control=12V
10	60.66	20.89	13.09	5.86	1.53
20	56.84	20.90	12.77	5.91	1.48
50	50.48	20.97	12.71	6.00	1.44
80	46.84	20.96	12.70	6.04	1.44
100	44.91	20.89	12.66	6.02	1.41
150	41.76	20.91	12.70	6.08	1.45
200	39.42	20.86	12.69	6.09	1.46
250	37.58	20.83	12.72	6.11	1.46
300	36.09	20.81	12.72	6.13	1.49
350	34.78	20.75	12.73	6.15	1.48
400	33.69	20.73	12.72	6.15	1.50
450	32.69	20.69	12.75	6.19	1.52
500	31.80	20.62	12.74	6.20	1.51
550	31.02	20.57	12.75	6.22	1.55
600	30.23	20.48	12.75	6.24	1.54
650	29.61	20.45	12.77	6.25	1.59
700	28.95	20.36	12.77	6.27	1.57
750	28.37	20.33	12.78	6.31	1.62
800	27.84	20.25	12.78	6.30	1.62
900	26.81	20.10	12.78	6.34	1.64
1000	25.91	19.90	12.78	6.38	1.68
1100	25.10	19.75	12.80	6.43	1.73
1200	24.44	19.61	12.80	6.46	1.82
1300	23.74	19.44	12.81	6.50	1.87
1400	23.08	19.21	12.80	6.53	1.87
1500	22.43	18.99	12.78	6.60	1.89
1600	21.86	18.77	12.78	6.64	1.93
1700	21.34	18.56	12.77	6.68	1.96
1800	20.83	18.35	12.76	6.73	1.99
1900	20.25	18.08	12.73	6.79	2.00
2000	19.71	17.84	12.70	6.87	2.02

REV. X1  
SVA-2000+  
070724  
Page 1 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant  
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



# Voltage Variable Attenuator

# SVA-2000+

## Typical Performance Data

FREQ. (MHz)	INPUT RETURN LOSS Vs. V CONTROL @ V+=5V				
	(dB)				
	@V Control=0V	@V Control=1V	@V Control=2V	@V Control=5V	@V Control=12V
10	8.50	9.50	12.69	19.28	18.03
20	11.08	11.94	16.40	23.38	18.71
50	14.94	15.32	21.40	29.20	19.24
80	16.18	16.47	23.39	31.30	19.39
100	16.43	16.71	23.85	32.07	19.17
150	17.21	17.45	25.14	31.92	19.48
200	17.52	17.73	25.51	31.43	19.39
250	17.75	17.96	25.79	30.68	19.42
300	17.82	18.00	25.63	29.86	19.30
350	17.90	18.06	25.57	29.28	19.25
400	17.89	18.06	25.27	28.48	19.11
450	17.89	18.01	24.97	27.85	18.97
500	17.83	17.95	24.64	27.21	18.82
550	17.77	17.88	24.25	26.55	18.65
600	17.62	17.74	23.85	25.99	18.44
650	17.55	17.63	23.49	25.45	18.28
700	17.42	17.49	23.07	24.91	18.08
750	17.28	17.34	22.69	24.45	17.87
800	17.10	17.17	22.30	23.98	17.65
900	16.74	16.81	21.60	23.23	17.24
1000	16.35	16.45	20.92	22.46	16.86
1100	15.97	16.11	20.43	22.02	16.50
1200	15.65	15.85	20.02	21.67	16.28
1300	15.18	15.44	19.52	21.26	15.92
1400	14.77	15.15	19.20	21.04	15.68
1500	14.43	14.91	18.97	20.97	15.55
1600	14.12	14.71	18.83	20.92	15.44
1700	13.87	14.60	18.83	21.07	15.39
1800	13.70	14.57	18.96	21.36	15.40
1900	13.55	14.59	19.19	21.77	15.41
2000	13.49	14.73	19.61	22.39	15.49

REV. X1  
SVA-2000+  
070724  
Page 2 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant  
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



# Voltage Variable Attenuator

# SVA-2000+

## Typical Performance Data

FREQ. (MHz)	OUTPUT RETURN LOSS Vs. V CONTROL @ V+=5V				
	(dB)				
	@V Control=0V	@V Control=1V	@V Control=2V	@V Control=5V	@V Control=12V
10	7.76	9.69	13.25	20.75	18.04
20	10.11	12.71	18.13	25.79	18.71
50	13.52	17.11	25.52	28.92	19.23
80	14.61	18.67	29.03	28.31	19.37
100	15.06	19.28	30.64	28.09	19.26
150	15.56	20.12	33.10	27.27	19.51
200	15.93	20.71	34.76	26.78	19.54
250	16.14	21.04	35.30	26.39	19.61
300	16.28	21.27	35.71	26.18	19.62
350	16.38	21.44	35.82	25.95	19.64
400	16.46	21.55	35.87	25.80	19.60
450	16.53	21.69	35.56	25.57	19.63
500	16.55	21.70	35.25	25.44	19.55
550	16.57	21.73	35.04	25.32	19.54
600	16.54	21.70	34.78	25.22	19.46
650	16.54	21.66	34.61	25.09	19.42
700	16.51	21.64	34.32	24.97	19.37
750	16.49	21.56	34.09	24.86	19.34
800	16.43	21.48	33.83	24.81	19.24
900	16.28	21.24	33.45	24.75	19.11
1000	16.10	20.96	33.17	24.75	19.01
1100	15.91	20.60	33.00	24.88	18.94
1200	15.73	20.34	32.93	25.08	19.01
1300	15.48	20.02	32.91	25.54	19.05
1400	15.29	19.73	33.07	26.14	19.16
1500	15.08	19.43	33.11	26.94	19.47
1600	14.90	19.22	33.12	27.81	19.81
1700	14.77	19.08	33.06	28.58	20.22
1800	14.68	18.97	32.49	29.06	20.75
1900	14.65	18.98	31.64	28.71	21.28
2000	14.66	19.06	30.44	27.71	21.79

REV. X1  
SVA-2000+  
070724  
Page 3 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant  
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



# Voltage Variable Attenuator

# SVA-2000+

## Typical Performance Data

FREQ. (MHz)	INPUT IP3 Vs. V CONTROL @ V+=5V (dBm)				
	@V Control=0V	@V Control=1V	@V Control=2V	@V Control=5V	@V Control=12V
10	16.45	12.29	15.68	19.00	31.69
20	25.98	14.91	19.84	24.07	35.73
50	28.35	20.21	27.14	31.27	40.30
100	37.06	24.76	31.59	35.44	42.46
200	40.83	29.27	36.27	38.97	45.44
300	41.40	32.16	38.92	41.11	44.96
400	41.59	33.78	40.21	42.49	45.84
500	42.83	35.16	41.38	43.71	45.36
600	43.97	37.07	41.99	44.17	46.01
700	44.98	38.01	43.86	45.97	46.08
800	46.29	40.09	44.38	45.44	45.61
900	46.98	39.30	44.54	47.92	45.10
1000	47.84	40.77	45.23	49.90	47.24
1100	48.48	41.53	45.99	50.30	48.46
1200	50.65	41.99	46.43	51.44	48.03
1300	51.60	42.48	46.71	50.05	47.81
1400	50.42	42.02	45.87	49.80	47.76
1500	49.17	42.07	46.58	50.41	47.95
1600	49.05	43.33	46.57	49.14	48.26
1700	48.49	43.21	46.93	50.14	48.70
1800	48.36	43.66	47.62	49.86	48.85
1900	47.57	43.14	47.63	50.27	47.77
2000	46.87	43.72	46.46	50.55	48.18

REV. X1  
SVA-2000+  
070724  
Page 4 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant  
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



# Voltage Variable Attenuator

# SVA-2000+

## Typical Performance Data

FREQ. (MHz)	PHASE SHIFT Vs. V CONTROL @ V+=5V				
	(deg)				
	@V Control=0V	@V Control=1V	@V Control=2V	@V Control=5V	@V Control=12V
50	78.54	2.68	0.86	0.06	0.25
80	81.99	3.23	0.78	0.23	0.25
100	83.19	3.79	0.97	0.30	0.39
150	84.14	4.98	1.13	0.63	0.93
200	85.03	6.23	1.44	0.84	1.47
250	85.92	7.70	1.72	1.05	1.86
300	86.22	8.97	1.96	1.25	2.28
350	86.88	10.51	2.37	1.39	2.59
400	87.44	11.91	2.69	1.49	2.91
450	87.80	13.16	3.11	1.63	3.37
500	88.27	14.75	3.47	1.90	3.61
550	88.24	15.99	3.88	1.90	4.09
600	88.70	17.49	4.11	2.19	4.40
650	88.85	18.69	4.55	2.17	4.81
700	89.38	20.00	5.01	2.35	5.02
750	89.40	21.38	5.42	2.36	5.50
800	89.95	22.65	5.76	2.60	5.56
900	90.61	25.43	6.50	2.83	6.09
1000	90.96	27.51	7.22	3.03	6.79
1100	91.40	29.91	8.15	3.20	7.41
1200	91.82	32.31	9.14	3.07	7.81
1300	92.29	34.42	9.94	3.27	8.36
1400	93.04	36.85	10.81	3.55	8.75
1500	93.40	38.69	11.52	3.72	9.42
1600	93.81	40.77	12.36	3.88	9.99
1700	94.38	42.42	13.19	4.19	10.47
1800	95.19	44.75	13.96	4.43	10.80
1900	95.80	46.32	14.84	4.65	11.53
2000	95.86	47.91	15.55	4.79	12.30

REV. X1  
SVA-2000+  
070724  
Page 5 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661









The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



# Voltage Variable Attenuator

## Typical Performance Curves

# SVA-2000+

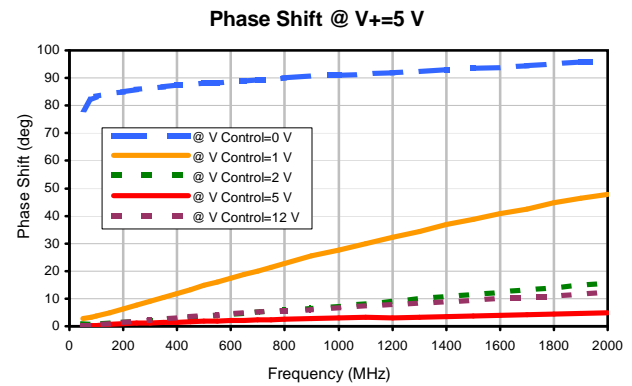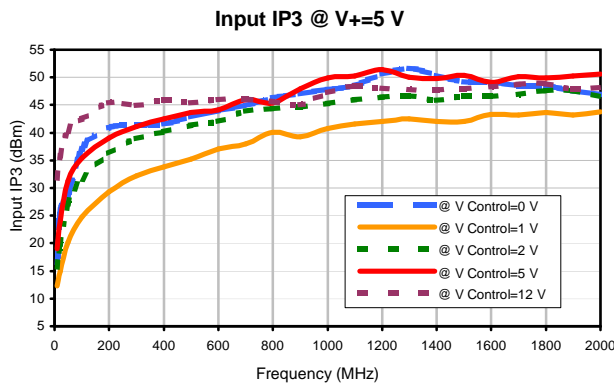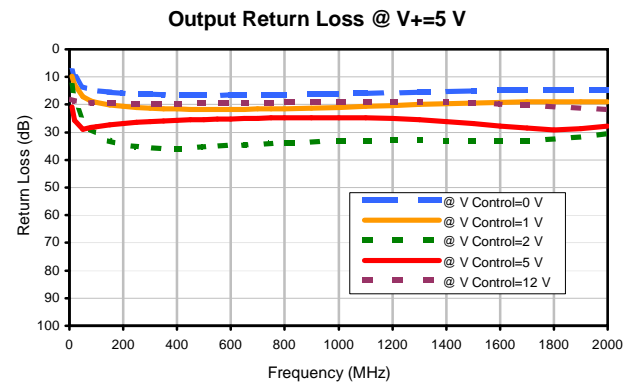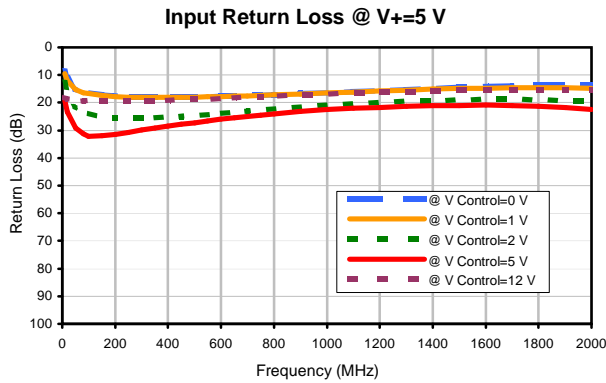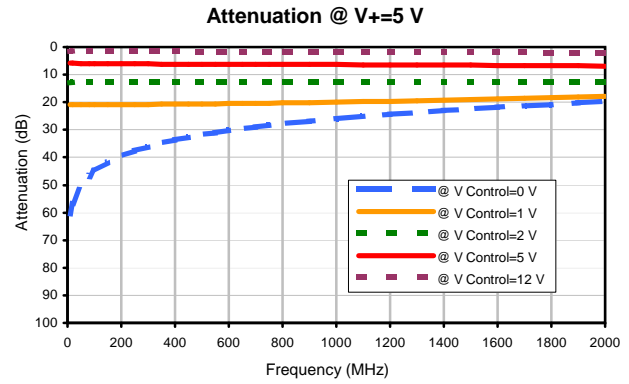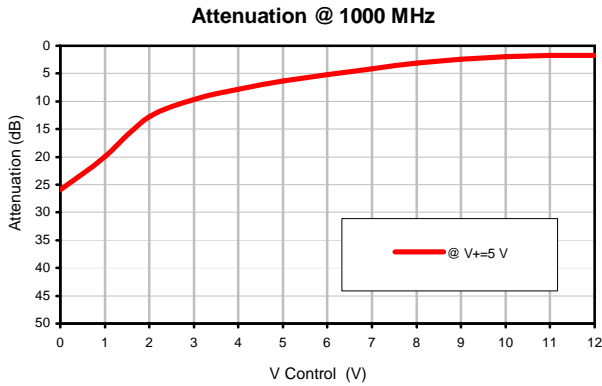

REV. X1  
SVA-2000+  
070724  
Page 1 of 1



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant  
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see








### Outline Dimensions

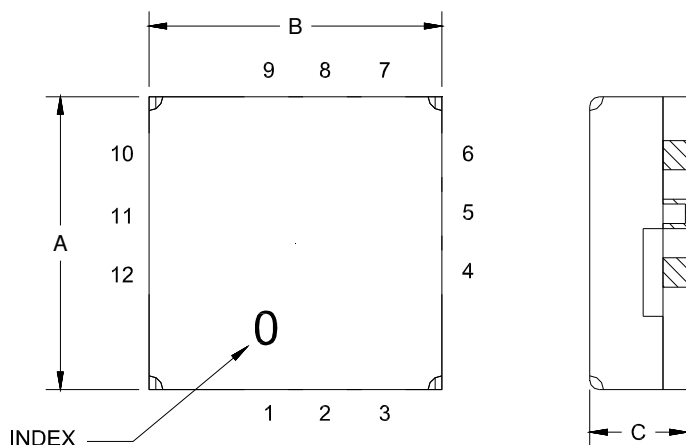

### PCB Land Pattern

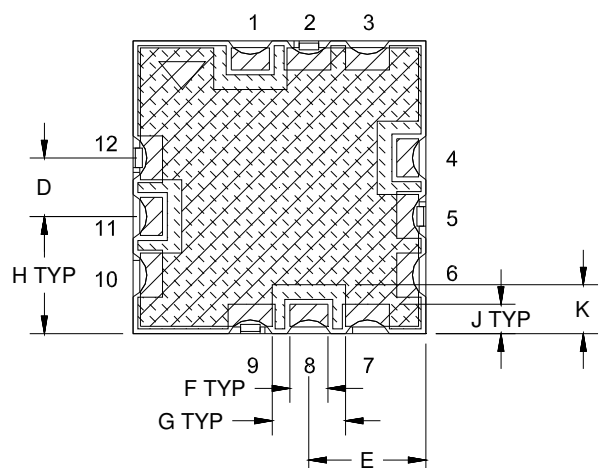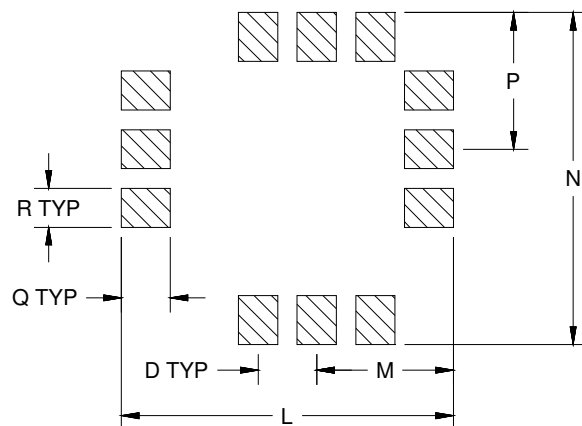

CASE #	A	B	C	D	E	F	G	H	J	K
FZ990	.300 (7.62)	.300 (7.62)	.100 (2.54)	.060 (1.52)	.120 (3.05)	.039 (0.99)	.075 (1.91)	.120 (3.05)	.030 (0.76)	.050 (1.27)

CASE #	L	M	N	P	Q	R	WT. GRAM
FZ990	.340 (8.64)	.140 (3.56)	.340 (8.64)	.140 (3.56)	.050 (1.27)	.040 (1.02)	.25

Dimensions are in inches (mm). Tolerances: 2 Pl.  $\pm .03$ ; 3Pl.  $\pm .015$

### Notes:

- Case material: Nickel-Silver alloy.
- Base: Printed wiring laminate.
- Termination finish:  
For RoHS Case Styles: 3-5  $\mu$  inch (.08-.13 microns) Gold over 120-240  $\mu$  inch (3.05-6.10 microns) Nickel plate.




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

# Tape & Reel Packaging TR-F78

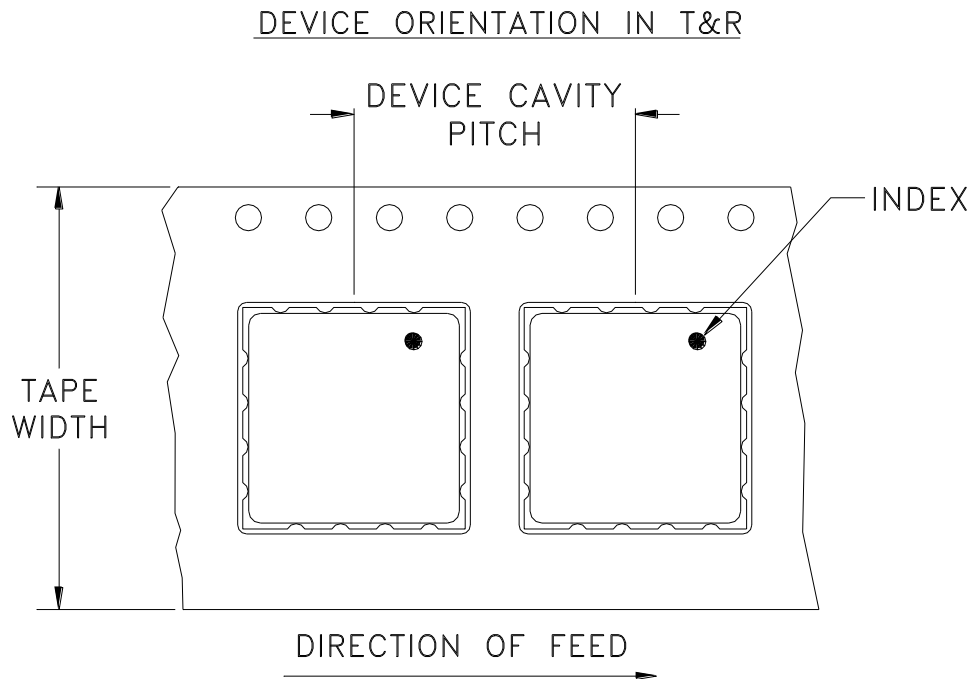

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note
16	12	7	10
			20
			50
			100
			200
		13	500, 1000

Note: Please consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: [www.minicircuits.com/pages/pdfs/tape.pdf](http://www.minicircuits.com/pages/pdfs/tape.pdf)




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M111698	NEW RELEASE (FROM RAVON)	06/07	DK	HH
OR	R68999	NEW RELEASE (FROM RAVON)	06/07	DK	HH

**SUGGESTED MOUNTING CONFIGURATION  
FOR FZ990 CASE STYLE, sk PIN CONNECTION.**

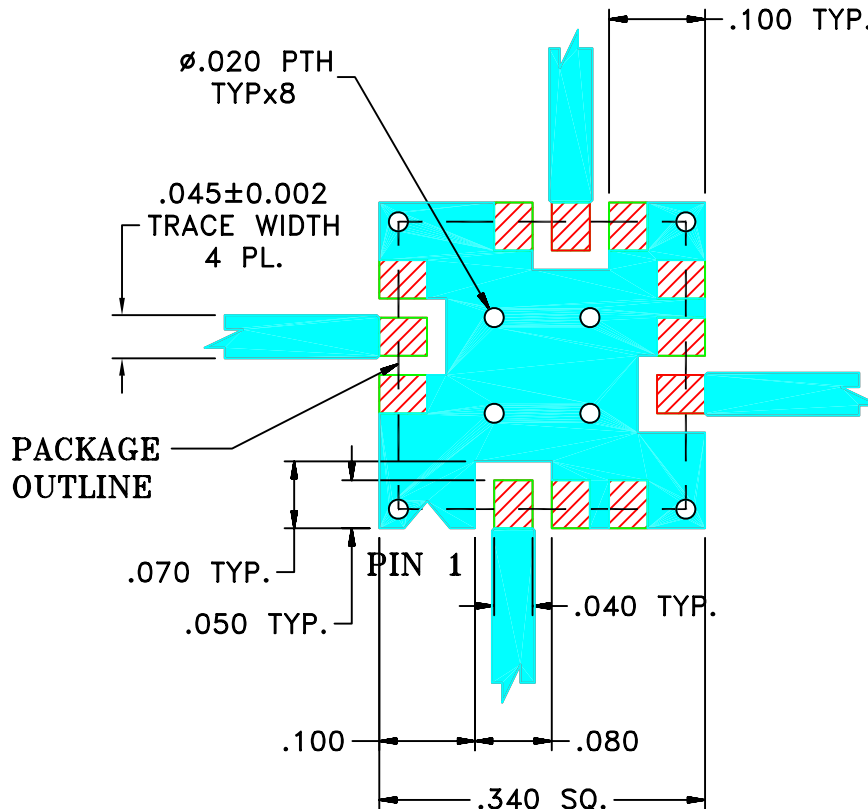

**NOTE:**

- TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS. .025"±.002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED	INITIALS	DATE
DIMENSIONS ARE IN INCHES TOLERANCES ON: 2 PL DECIMALS ± 3 PL DECIMALS ± .005 ANGLES ± FRACTIONS ±	DRAWN	DK (RAY) 14/06/07
	CHECKED	RZ (RAY) 14/06/07
	APPROVED	HH (RAY) 14/06/07




**Mini-Circuits®** 13 Neptune Avenue  
Brooklyn NY 11235

PL, sk, FZ990, SVA, TB-457+


Mini-Circuits®  
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.  
ASHEETA1.DWG REV:A DATE:01/12/95

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-277	OR
FILE:	98PL277	SCALE: 5:1	SHEET: 1 OF 1

# Evaluation Board and Circuit

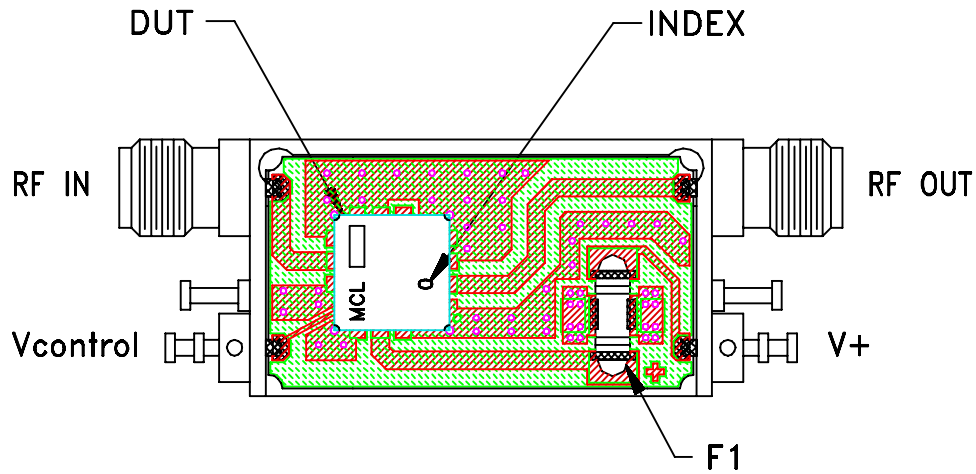


TB-457+

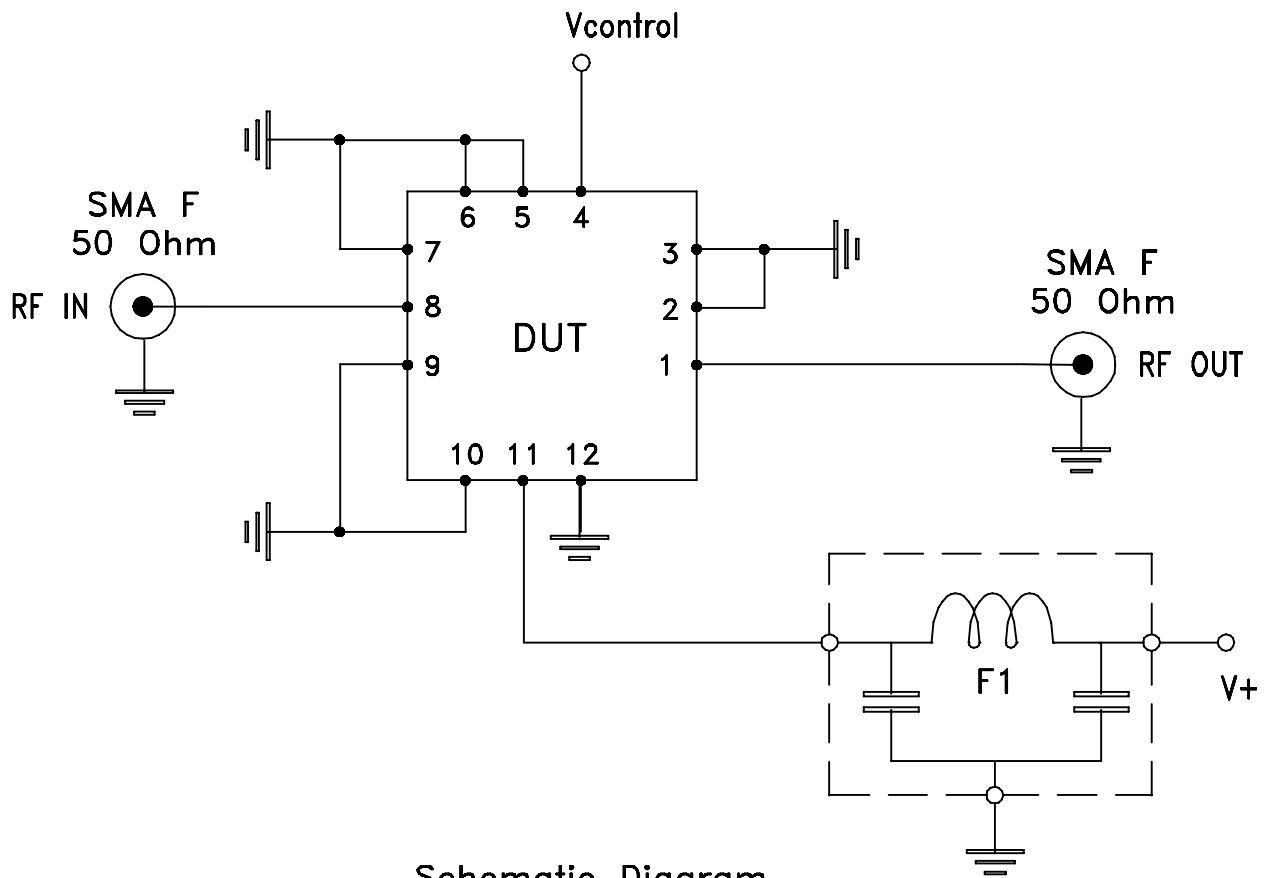

Schematic Diagram

## Notes:

1. SMA Female connectors.
2. PCB Material: FR4 GRADE IT-180TC (ITEQ CORPORATION)  
Dielectric Constant=4.5, Thickness=.025 inch.

 **Mini-Circuits®**

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
HAST	130°C, 85% RH, 96 hours	JESD22-A110
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutectic Process: 225°C peak Pb-Free Process, 245°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Vibration (High Frequency)	20g peak, 20-2000 Hz, 4 times in each of three axes (total 12)	MIL-STD-883, Method 2007.3, Condition A
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215