



SURFACE MOUNT ^{top hat} RF Transformer

50Ω 30 to 6000 MHz

TCM2-63WX+

THE BIG DEAL

- Wideband, 30 to 6000 MHz
- Low insertion loss, 1.5 dB typ. up to 4 GHz
- Good amplitude unbalance, ±0.4 dB typ.
- Good input return loss, 15 dB typ.
- Low phase unbalance, ±4° typ.



Generic photo used for illustration purposes only

CASE STYLE: DB1627

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- PCS
- Wideband push-pull amplifiers
- Cellular

PRODUCT OVERVIEW

Mini-Circuits' TCM2-63WX+ is a surface-mount transmission line core and wire transformer covering a very wide frequency range from 30 to 6000 MHz. The transformer provides low insertion loss. It achieves low phase and amplitude unbalance and excellent input return loss performance. Featuring core and wire construction on a 6-lead plastic base with tin over nickel termination finish, the unit measures 0.16 x 0.15 x 0.16", accommodating dense circuit board layouts. It also incorporates Mini-Circuits' Top Hat® feature for faster, more accurate pick-and-place assembly and easy visual inspection.

KEY FEATURES

Feature	Advantages
Wideband, 30 to 6000 MHz	Very wide frequency range covers bandwidth requirements for many broadband applications.
Low insertion loss, 1.5 dB up to 4 GHz	TCM2-63WX+ provides excellent signal transmission from input to output with consistent performance across its entire frequency range.
Good input return loss, 15 dB typ.	Provides good matching with minimal signal reflection.
Small footprint 0.16" x 0.15" x 0.16"	Accommodates tight space requirements for dense PCB layouts.
Top Hat® feature	Improves speed and accuracy of pick and place assembly and provides clear device marking for visual inspection.



top hat[®]

SURFACE MOUNT RF Transformer

TCM2-63WX+

Mini-Circuits[®]


50Ω 30 to 6000 MHz

ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Units
Impedance Ratio (secondary/primary)		2			Ohm
Frequency Range		30		6000	MHz
Insertion Loss*	100-4000	—	0.9	1.9	dB
	30-5000	—	1.5	2.9	
	5000-6000	—	2.5	3.9	
Amplitude Unbalance	100-4500	—	0.4	—	dB
	30-6000	—	0.5	—	
Phase Unbalance	100-4500	—	4	—	Degree
	30-6000	—	5	—	
Common Mode Rejection	100-4500	18	25	—	dB
	30-6000	15	20	—	

*Average Insertion Loss is referenced to mid-band loss 0.9 dB.


ELECTRICAL SCHEMATIC

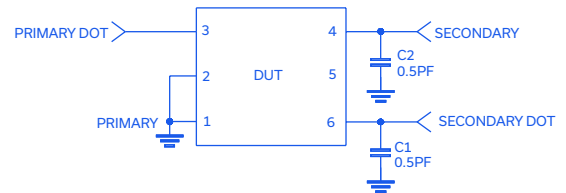

MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.4 W
DC Current	30 mA

CONFIGURATION K

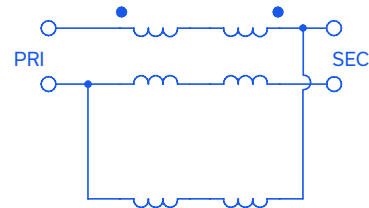




PAD CONNECTIONS

PRIMARY DOT	3
PRIMARY	1,2
SECONDARY DOT	6
SECONDARY	4
GND	1,2
NOT USED	5

PRODUCT MARKING: WJ

DEMOBOARD MCL P/N: TB-TCM2-63WX+ SUGGESTED PCB LAYOUT (PL-380)

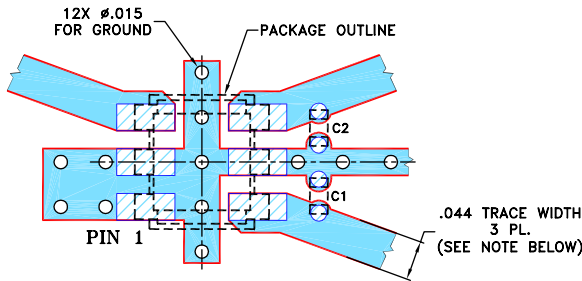


COMPONENT	SIZE
C1, C2	0402


- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS $.020" \pm .0015"$; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. CHIP COMPONENT FOOT PRINTS SHOWN FOR REFERENCE. FOR COMPONENT VALUES REFER TO TB-676+.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

OUTLINE DRAWING

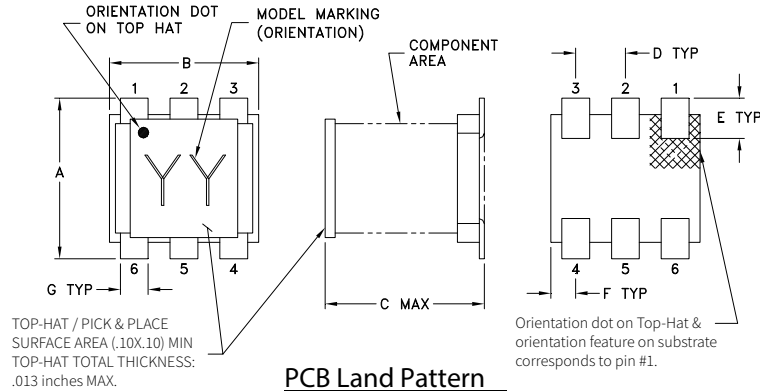

PCB Land Pattern

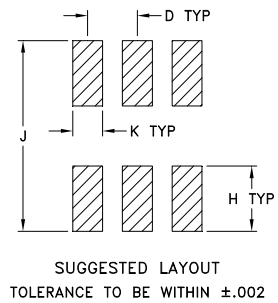

OUTLINE DIMENSIONS (Inches/mm)

A	B	C	D	E	F
.160	.150	.160	.050	.040	.025
4.06	3.81	4.06	1.27	1.02	0.64
G	H	J	K		wt
.028	.065	.190	.030		grams
0.71	1.65	4.83	0.76		0.15

TAPE & REEL INFORMATION: F47







SURFACE MOUNT ^{top hat} RF Transformer

TCM2-63WX+

50Ω 30 to 6000 MHz

TYPICAL PERFORMANCE DATA

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	Amplitude Unbalance (dB)	Phase Unbalance (deg)	CMRR (dB)
30	2.56	15.56	0.14	1.23	37.38
500	1.58	14.22	0.50	2.86	28.38
1000	1.21	15.10	0.57	2.89	27.62
1500	0.97	18.46	0.41	2.70	29.50
2000	0.87	23.81	0.16	2.68	32.03
2500	0.96	18.16	0.09	2.59	32.73
3000	1.13	13.61	0.30	2.04	32.14
4000	1.24	12.99	0.64	0.83	28.47
5000	1.22	22.65	0.85	4.94	23.73
6000	2.68	10.37	0.59	10.30	20.32


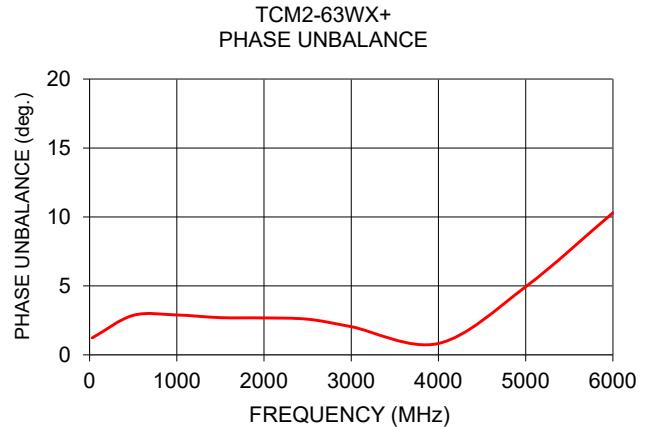
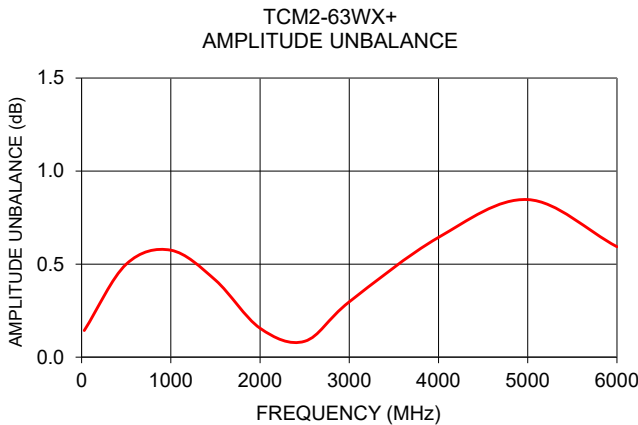
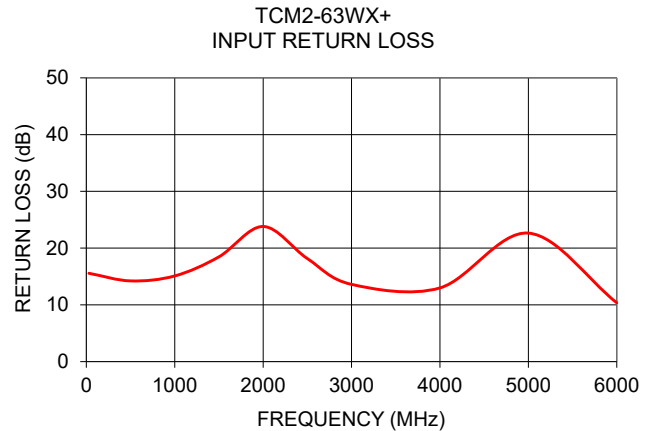
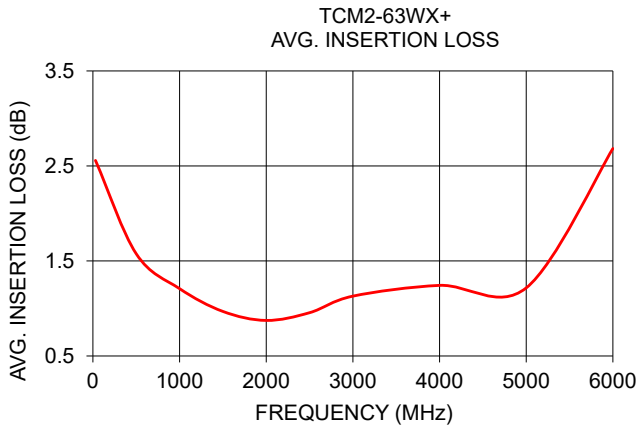


- NOTES**
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 - B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 - C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html


Typical Performance Data

FREQUENCY (MHz)	AVERAGE INSERTION LOSS (dB)	INPUT RETURN LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (deg.)	CMRR (dB)
10	3.22	11.19	0.03	1.93	35.42
15	2.95	13.30	0.09	1.56	36.75
20	2.79	14.47	0.12	1.37	37.25
25	2.66	15.16	0.13	1.27	37.42
30	2.56	15.56	0.14	1.23	37.38
50	2.30	16.03	0.18	1.25	36.47
100	2.04	15.76	0.24	1.46	34.55
200	1.86	15.14	0.32	1.95	31.99
300	1.76	14.68	0.38	2.37	30.37
400	1.66	14.39	0.45	2.67	29.17
500	1.58	14.22	0.50	2.86	28.38
600	1.49	14.18	0.54	2.96	27.85
700	1.41	14.26	0.57	2.99	27.56
800	1.34	14.44	0.58	2.97	27.44
900	1.27	14.72	0.59	2.94	27.46
1000	1.21	15.10	0.57	2.89	27.62
1100	1.15	15.58	0.56	2.85	27.82
1200	1.10	16.14	0.53	2.79	28.16
1300	1.05	16.80	0.50	2.76	28.54
1400	1.01	17.57	0.46	2.71	29.02
1500	0.97	18.46	0.41	2.70	29.50
1600	0.94	19.49	0.37	2.67	30.05
1700	0.91	20.67	0.32	2.67	30.59
1800	0.89	21.93	0.26	2.65	31.16
1900	0.88	23.12	0.21	2.65	31.67
2000	0.87	23.81	0.16	2.68	32.03
2100	0.88	23.64	0.11	2.69	32.29
2200	0.89	22.58	0.06	2.67	32.57
2300	0.90	21.07	0.00	2.65	32.71
2400	0.93	19.56	0.04	2.65	32.69
2500	0.96	18.16	0.09	2.59	32.73
2600	0.99	16.94	0.14	2.52	32.64
2700	1.02	15.87	0.17	2.45	32.55
2800	1.06	14.98	0.22	2.34	32.44
2900	1.10	14.21	0.26	2.19	32.35
3000	1.13	13.61	0.30	2.04	32.14
3100	1.16	13.11	0.33	1.89	31.95
3200	1.19	12.73	0.37	1.67	31.76
3300	1.22	12.46	0.41	1.41	31.56
3400	1.24	12.29	0.44	1.20	31.23
3500	1.25	12.19	0.47	0.90	31.08
3600	1.26	12.19	0.50	0.55	30.66
3700	1.26	12.26	0.54	0.21	30.16
3800	1.26	12.44	0.58	0.11	29.56
3900	1.25	12.67	0.61	0.45	29.04
4000	1.24	12.99	0.64	0.83	28.47
4500	1.19	16.14	0.78	2.77	25.84
5000	1.22	22.65	0.85	4.94	23.73
5500	1.60	16.31	0.80	7.43	22.00
5900	2.39	11.24	0.65	9.74	20.62
6000	2.68	10.37	0.59	10.30	20.32
6500	5.16	9.04	0.10	14.15	18.12
7000	6.36	5.87	0.10	19.35	15.36


Typical Performance Data

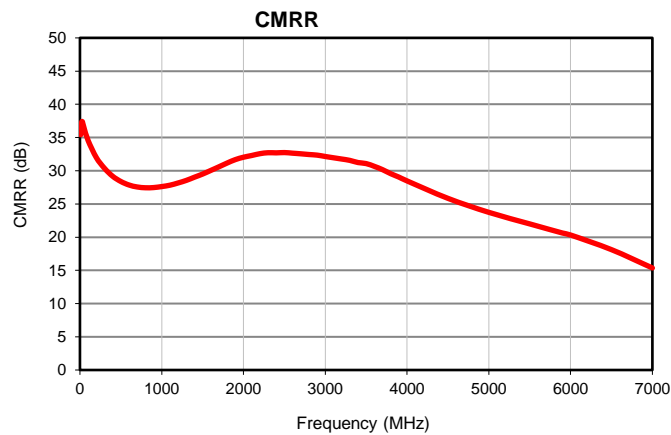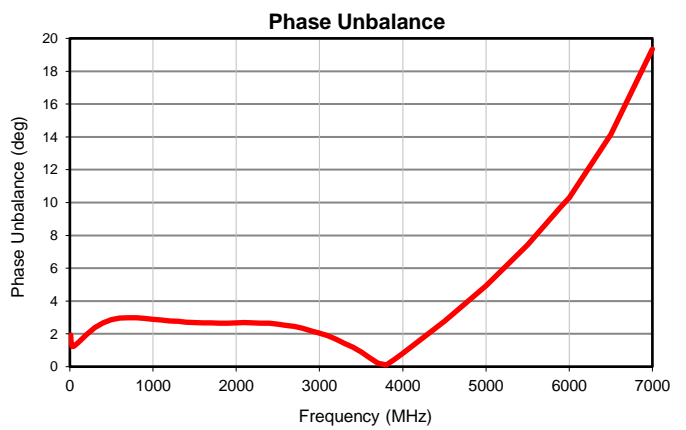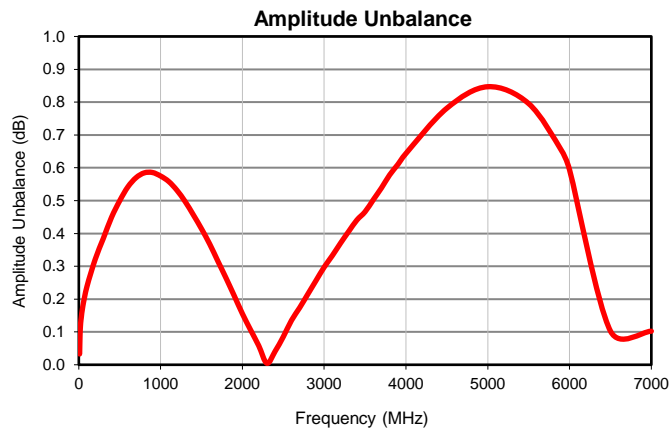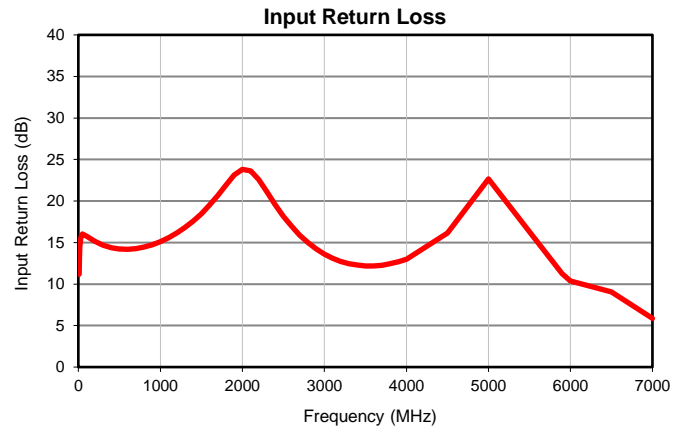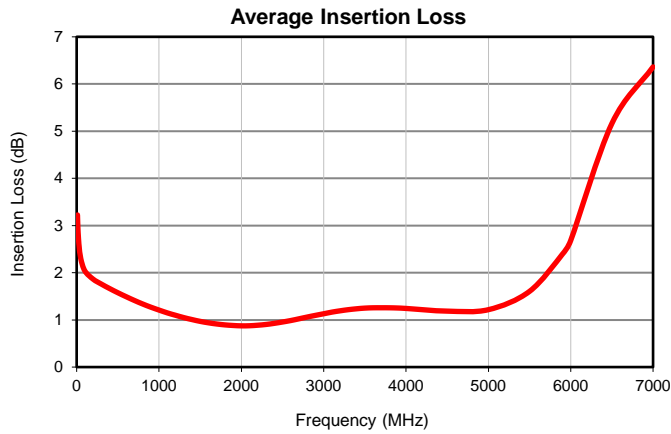

Outline Dimensions

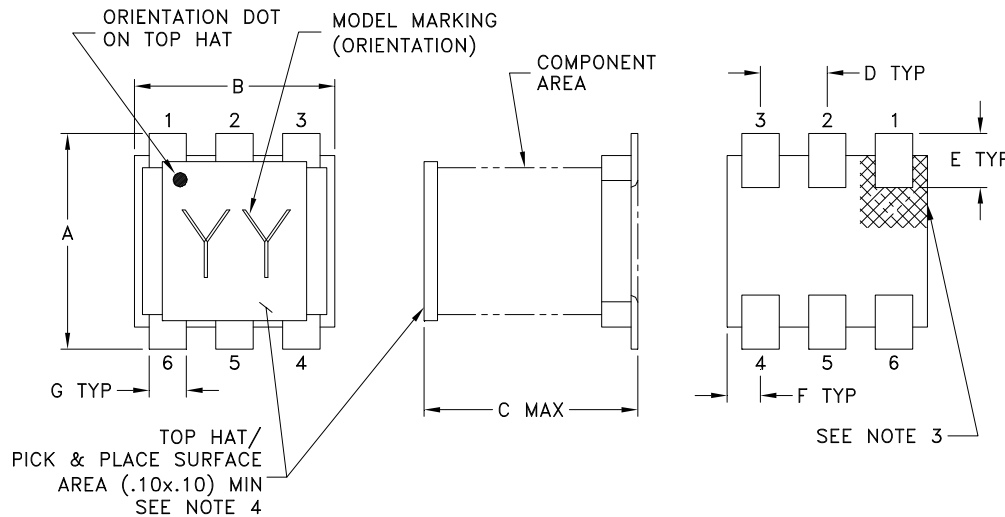

PCB Land Pattern

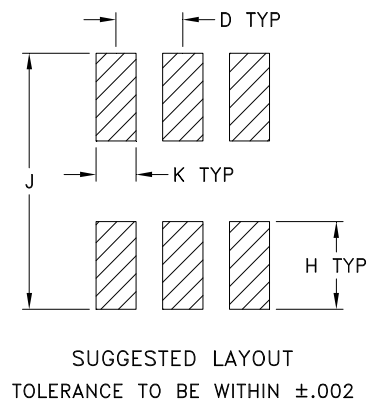

CASE #	A	B	C	D	E	F	G	H	J	K	WT. GRAM
DB1627	.160 (4.06)	.150 (3.81)	.160 (4.06)	.050 (1.27)	.040 (1.02)	.025 (0.64)	.028 (0.71)	.065 (1.65)	.190 (4.83)	.030 (0.76)	.15

Dimensions are in inches (mm). Tolerances: 2 Pl. ± .01; 3Pl. ± .005

Notes:

- Case material: Plastic.
- Termination finish:
For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.
- Orientation dot on top hat & orientation feature on substrate correspondence to pin #1.
- Top-Hat total thickness: .013 inches MAX.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site




The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

Tape & Reel Packaging TR-F47

DEVICE ORIENTATION IN T&R

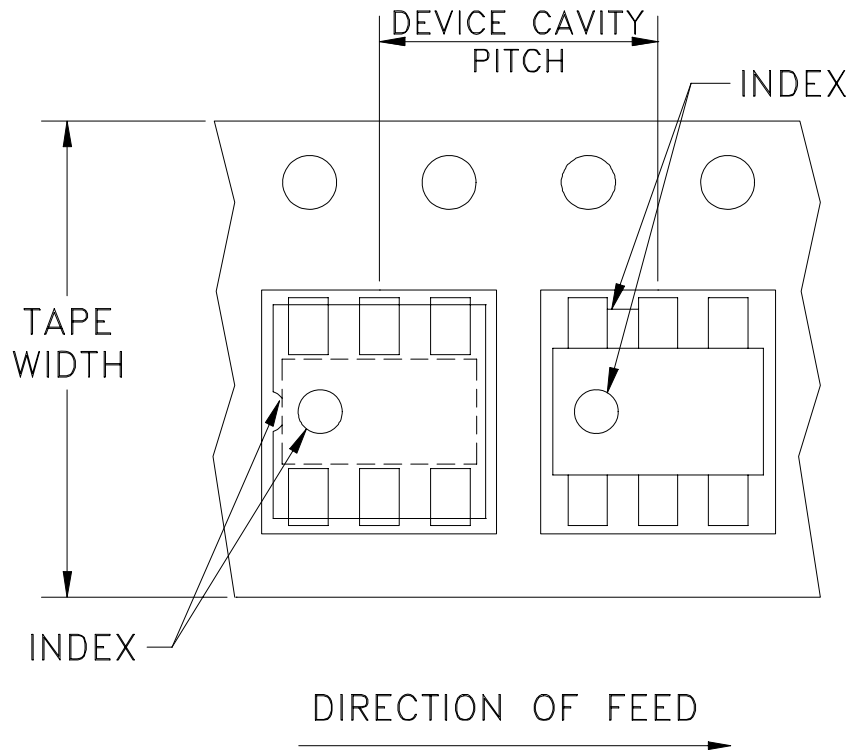

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note
12	8	13	1000, 2000
		7	20, 50, 100, 200, 500

Note: Please consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf

Mini-Circuits[®]


INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION

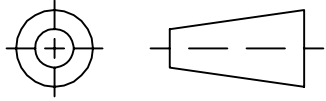

REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M138367	NEW RELEASE	08/15/12	AV	DJ

SUGGESTED MOUNTING CONFIGURATION
FOR DB1627 CASE STYLE, "06TK02" PIN CODE

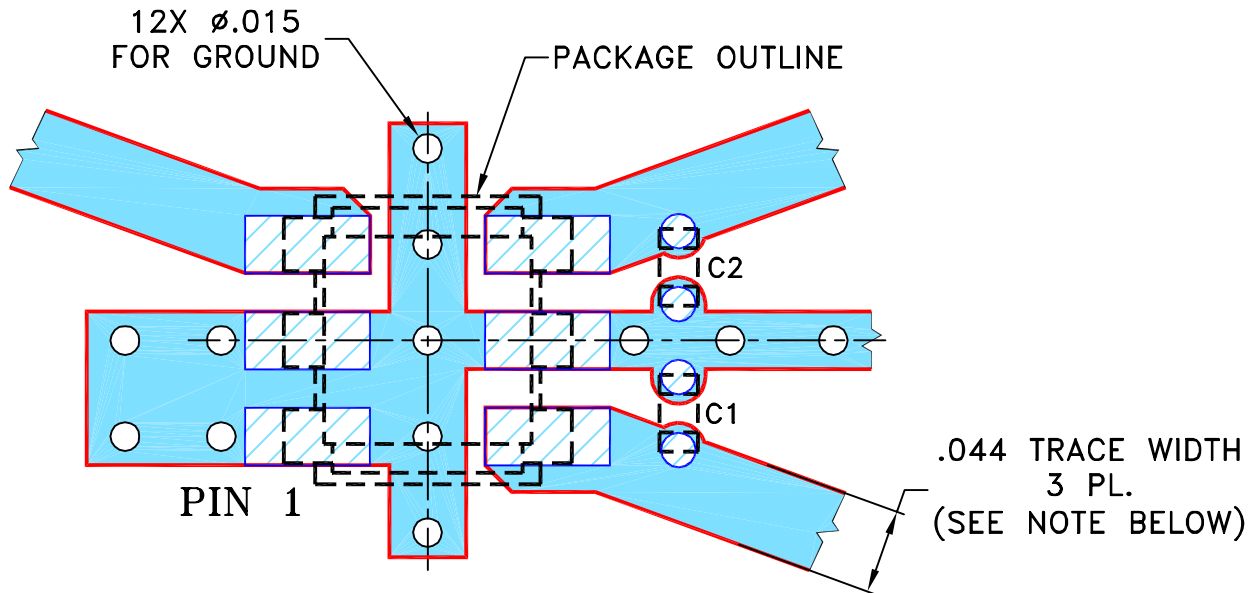

COMPONENT	SIZE
C1, C2	0402

- NOTES:**
- TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
 - CHIP COMPONENT FOOT PRINTS SHOWN FOR REFERENCE. FOR COMPONENT VALUES REFER TO TB-676+.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED	INITIALS	DATE
DRAWN	AV	08/13/12
CHECKED	IL	08/15/12
APPROVED	DJ	08/15/12



Mini-Circuits®
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.
ASHEETA1.DWG REV:A DATE:01/12/95

Mini-Circuits®
13 Neptune Avenue
Brooklyn NY 11235

PL, 06TK02, DB1627, TB-676+

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-380	OR
FILE:	98PL380	SCALE: 10:1	SHEET: 1 OF 1


Evaluation Board and Circuit

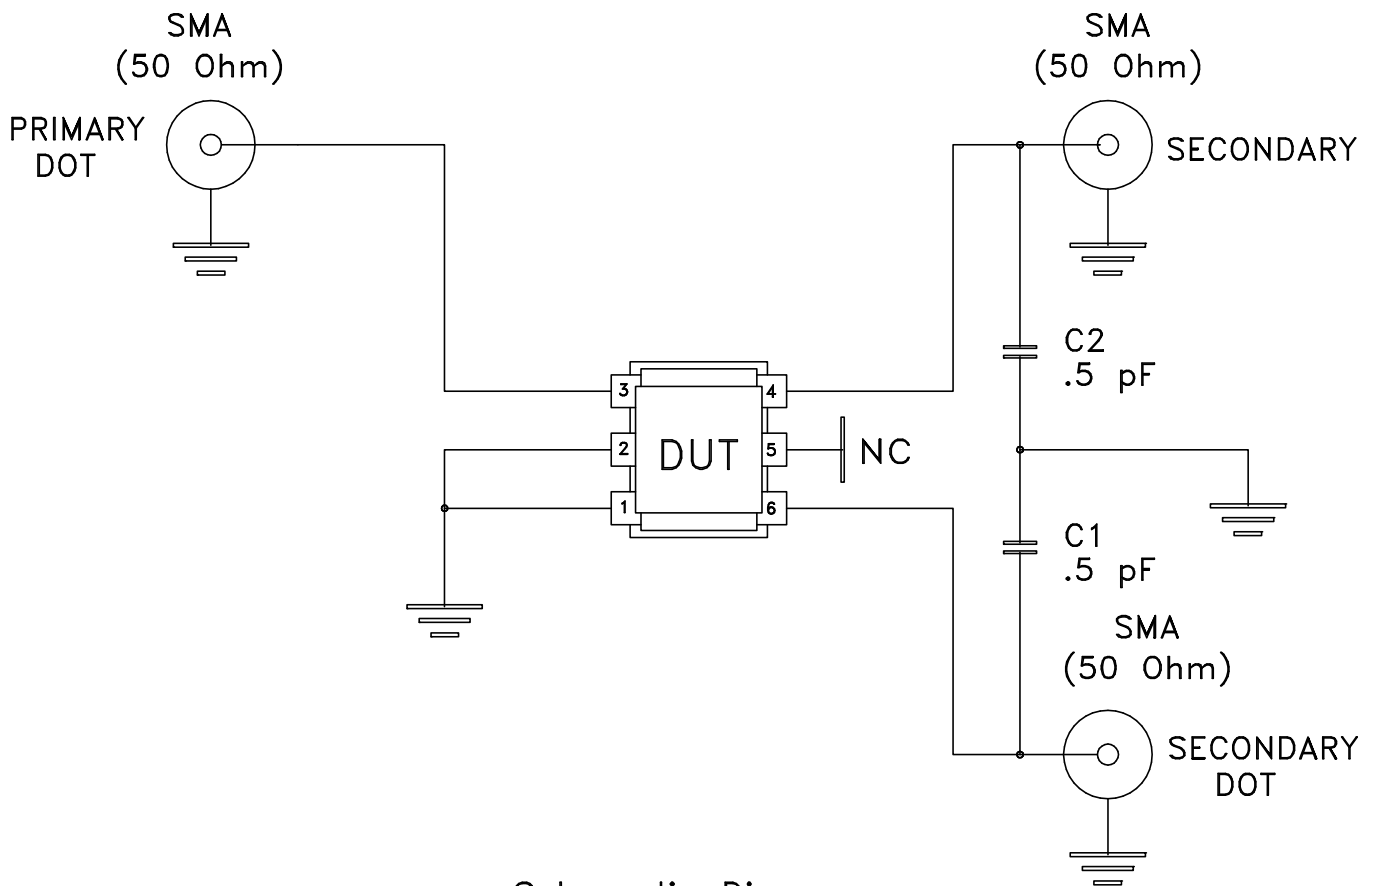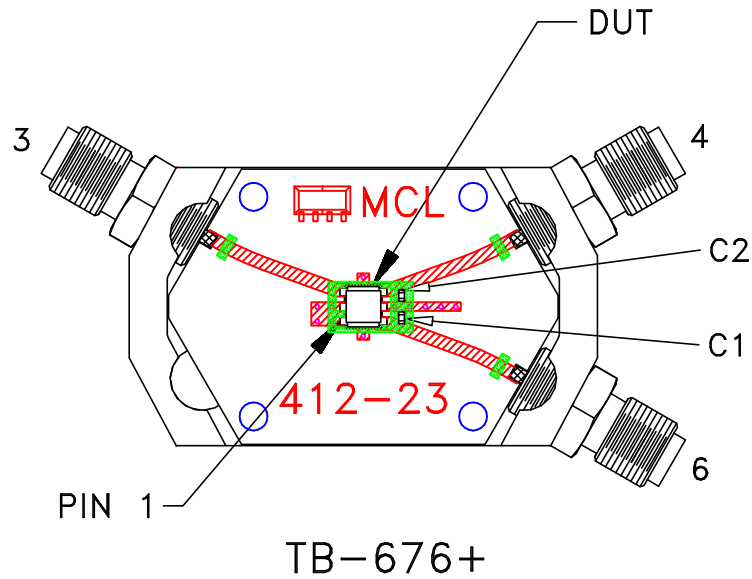

Schematic Diagram

Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.020 inch.





All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215