


# Surface Mount Attenuator/Switch

50Ω Bi-Phase 2 to 400 MHz

## TFAS-1SM+



CASE STYLE: NNN150  
PRICE: \$18.20 ea. QTY. (1-9)


### Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Control Current	30mA
Permanent damage may occur if any of these limits are exceeded.	

### Pin Connections

INPUT	1
OUTPUT	4
CONTROL	2
GROUND EXT.	3
CASE GROUND	3

### Outline Drawing

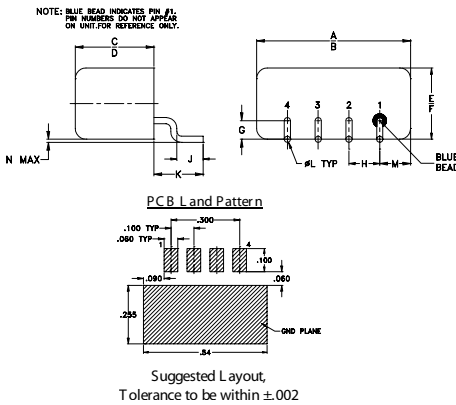


### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.50	.48	.255	.240	.23	.21	.06
12.70	12.19	6.48	6.10	5.84	5.33	1.52


  

H	J	K	L	M	N	wt
.100	.09	.16	.020	.09	.005	grams
2.54	2.29	4.06	0.51	2.29	0.13	1.9

### suggested control port biasing configuration



### Demo Board MCL P/N: TB-201 Suggested PCB Layout (PL-081)



- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS: 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.  
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

### Features

- low insertion loss, 1.6 dB typ.
- excellent phase and amplitude unbalance

### Applications

- electronic attenuator

### Attenuator/Switch Electrical Specifications

FREQUENCY (MHz)	CON	INSERTION LOSS (dB) ±20 mA				MAX. INPUT PWR (dBm) ±20 mA		IN-OUT ISOLATION (dB) 0 mA						BI-PHASE X (±20 mA) Typ.			
		Mid-Band m		Total Range		1 dB compr.	no damage	L		M		U		ΔAMP (dB)	Phase (deg.) deviation from 180°		
f <sub>L</sub> -f <sub>U</sub>		Typ.	Max.	Typ.	Max.			Typ.	Min.	Typ.	Min.	Typ.	Min.	m	Total Range	m	Total Range
2-400	DC-0.05	1.4	2.0	1.6	3.0	20*	25	65	45	45	33	35	25	0.1	0.1	1.0	2.0




L = low range [f<sub>L</sub> to 10 f<sub>L</sub>] M = mid range [10 f<sub>L</sub> to f<sub>U</sub>/2] U = upper range [f<sub>U</sub>/2 to f<sub>U</sub>] m = [2 f<sub>L</sub> to f<sub>U</sub>/2]

\* 15 dBm from 2-10 MHz.


Performance specifications apply for input power up to 10 dB below stated 1 dB compression.

### Typical Performance Data

Freq. (MHz)	I. Loss (dB) at 20mA	±Control		20mA ΔPhase (deg.)	Isolation (dB) (in-out)	Input R. Loss (dB)	Control Current (mA)	Attenuation (dB)			Phase Δ ref at 15mA Ctrl			Input VSWR			
		ΔAMP (dB)	ΔPhase (deg.)					2 MHz	200 MHz	400 MHz	2 MHz	200 MHz	400 MHz	2 MHz	200 MHz	400 MHz	
	σ																
2.0	1.67	0.000	0.01	179.9	78	54	18.1	0.0000	72.7	39.0	30.6	27.2	-87.7	-95.3	7.7	7.2	4.4
7.0	1.16	0.001	0.00	180.0	68	43	15.4	0.0003	64.4	39.2	30.7	22.2	-86.0	-94.6	7.7	7.2	4.4
10.0	1.16	0.001	0.00	180.0	66	40	27.6	0.0005	56.5	39.0	30.8	28.6	-84.3	-93.7	7.6	7.2	4.4
21.9	1.16	0.001	0.00	180.0	58	33	31.0	0.0012	50.4	39.0	30.7	17.6	-80.5	-92.0	7.6	7.2	4.4
39.8	1.19	0.001	0.00	180.1	53	28	31.9	0.0019	47.8	39.0	30.7	14.1	-77.4	-90.3	7.5	7.2	4.4
59.7	1.23	0.001	0.00	180.1	50	25	32.1	0.0054	42.5	37.9	30.6	8.2	-56.2	-79.9	7.4	7.0	4.3
61.7	1.23	0.001	0.00	180.1	50	25	32.1	0.0100	38.4	35.8	30.1	7.6	-37.3	-67.6	7.2	6.9	4.3
81.6	1.24	0.001	0.00	180.2	47	22	32.2	0.0157	35.1	33.1	29.0	8.8	-25.3	-55.1	7.1	6.7	4.2
99.5	1.27	0.001	0.00	180.2	46	21	32.3	0.0284	30.6	28.7	26.3	8.8	-12.8	-37.6	6.7	6.3	4.0
121.4	1.31	0.001	0.01	180.3	44	19	32.4	0.0433	27.3	25.3	23.7	9.2	-7.2	-26.9	6.3	5.9	3.8
141.3	1.32	0.001	0.01	180.4	42	18	32.4	0.0722	23.2	21.2	20.0	9.3	-3.1	-17.7	5.6	5.3	3.5
181.1	1.37	0.001	0.01	180.6	39	16	32.2	0.1012	20.7	18.6	17.6	9.0	-1.4	-13.2	5.2	4.9	3.3
200.0	1.40	0.001	0.01	180.6	39	15	32.0	0.1898	16.1	14.1	13.3	8.2	0.4	-8.0	4.1	3.9	2.8
220.9	1.39	0.001	0.01	180.8	38	15	31.6	0.3008	13.1	11.2	10.6	7.4	0.9	-5.5	3.4	3.2	2.4
240.8	1.39	0.001	0.01	180.9	36	14	30.3	0.4259	10.9	9.2	8.8	6.7	1.1	-4.2	2.9	2.7	2.1
280.6	1.52	0.001	0.05	181.1	35	13	26.6	0.7017	8.3	6.9	6.6	5.4	1.1	-2.8	2.2	2.1	1.7
300.5	1.52	0.001	0.04	181.1	35	14	24.8	0.9968	6.8	5.6	5.4	4.4	0.9	-2.1	1.9	1.8	1.5
340.3	1.56	0.001	0.03	181.4	33	13	21.4	1.7486	4.8	3.9	4.0	3.0	0.7	-1.3	1.5	1.5	1.3
360.2	1.64	0.002	0.06	181.6	32	13	19.8	5.6920	2.5	2.1	2.3	0.9	0.2	-0.3	1.2	1.1	1.2
400.0	1.78	0.003	0.09	181.7	31	14	17.1	15.1258	1.8	1.5	1.8	0.0	0.0	0.1	1.3	1.1	1.3

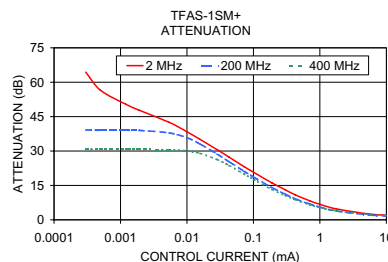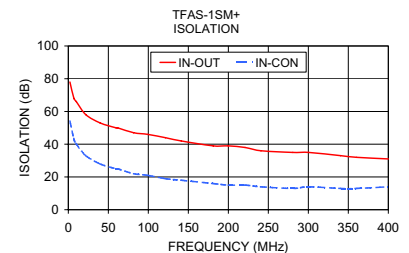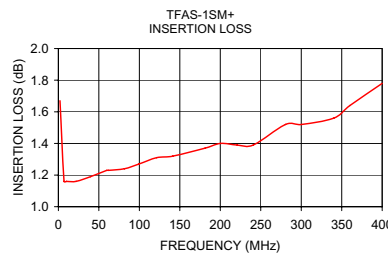

### electrical schematic



# Attenuator/Switch

# TFAS-1SM+

## Typical Performance Data

FREQ. (MHz)	INSERTION LOSS (dB) at 20mA Control Current	AMP. UNBAL. (dB) at ± 20mA Control Current	PHASE UNBAL. (deg.) at ± 20mA Control Current	ISOLATION at 0 mA Control Current (dB)		RETURN LOSS (dB) Input
				In-Out	In-Con	
2.0	1.67	0.01	179.9	78	54	18.1
7.0	1.16	0.00	180.0	68	43	15.4
10.0	1.16	0.00	180.0	66	40	27.6
21.9	1.16	0.00	180.0	58	33	31.0
39.8	1.19	0.00	180.1	53	28	31.9
59.7	1.23	0.00	180.1	50	25	32.1
61.7	1.23	0.00	180.1	50	25	32.1
81.6	1.24	0.00	180.2	47	22	32.2
99.5	1.27	0.00	180.2	46	21	32.3
121.4	1.31	0.01	180.3	44	19	32.4
141.3	1.32	0.01	180.4	42	18	32.4
181.1	1.37	0.01	180.6	39	16	32.2
200.0	1.40	0.01	180.6	39	15	32.0
220.9	1.39	0.01	180.8	38	15	31.6
240.8	1.39	0.01	180.9	36	14	30.3
280.6	1.52	0.05	181.1	35	13	26.6
300.5	1.52	0.04	181.1	35	14	24.8
340.3	1.56	0.03	181.4	33	13	21.4
360.2	1.64	0.06	181.6	32	13	19.8
400.0	1.78	0.09	181.7	31	14	17.1

CONTROL CURRENT (mA)	ATTENUATION (dB)			PHASE UNBALANCE REF AT 15 mA CONTROL (deg.)			INPUT VSWR (:1)		
	2 MHz	200 MHz	400 MHz	2 MHz	200 MHz	400 MHz	2 MHz	200 MHz	400 MHz
0.0000	72.7	39.0	30.6	27.2	-87.7	-95.3	7.7	7.2	4.4
0.0003	64.4	39.2	30.7	22.2	-86.0	-94.6	7.7	7.2	4.4
0.0005	56.5	39.0	30.8	28.6	-84.3	-93.7	7.6	7.2	4.4
0.0012	50.4	39.0	30.7	17.6	-80.5	-92.0	7.6	7.2	4.4
0.0019	47.8	39.0	30.7	14.1	-77.4	-90.3	7.5	7.2	4.4
0.0054	42.5	37.9	30.6	8.2	-56.2	-79.9	7.4	7.0	4.3
0.0100	38.4	35.8	30.1	7.6	-37.3	-67.6	7.2	6.9	4.3
0.0157	35.1	33.1	29.0	8.8	-25.3	-55.1	7.1	6.7	4.2
0.0284	30.6	28.7	26.3	8.8	-12.8	-37.6	6.7	6.3	4.0
0.0433	27.3	25.3	23.7	9.2	-7.2	-26.9	6.3	5.9	3.8
0.0722	23.2	21.2	20.0	9.3	-3.1	-17.7	5.6	5.3	3.5
0.1012	20.7	18.6	17.6	9.0	-1.4	-13.2	5.2	4.9	3.3
0.1898	16.1	14.1	13.3	8.2	0.4	-8.0	4.1	3.9	2.8
0.3008	13.1	11.2	10.6	7.4	0.9	-5.5	3.4	3.2	2.4
0.4259	10.9	9.2	8.8	6.7	1.1	-4.2	2.9	2.7	2.1
0.7017	8.3	6.9	6.6	5.4	1.1	-2.8	2.2	2.1	1.7
0.9968	6.8	5.6	5.4	4.4	0.9	-2.1	1.9	1.8	1.5
1.7486	4.8	3.9	4.0	3.0	0.7	-1.3	1.5	1.5	1.3
5.6920	2.5	2.1	2.3	0.9	0.2	-0.3	1.2	1.1	1.2
15.1258	1.8	1.5	1.8	0.0	0.0	0.1	1.3	1.1	1.3

REV. X1  
TFAS-1SM+  
061204  
Page 1 of 1



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant  
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




## Typical Performance Curves


Insertion Loss @ 20 mA

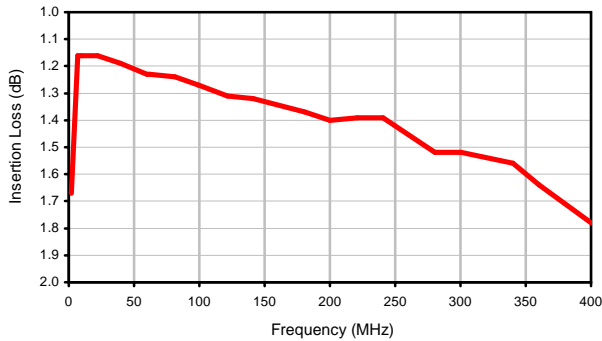


Amplitude Unbalance @ ± 20mA

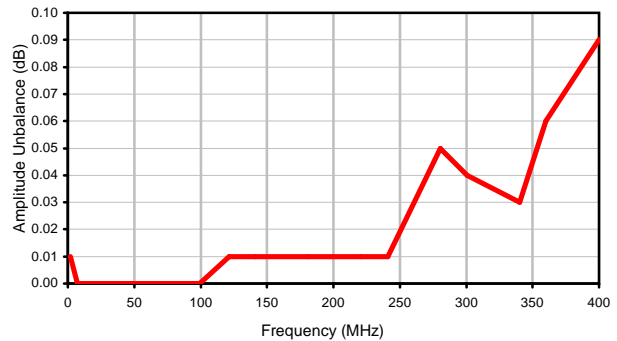


Phase Unbalance @ ± 20mA

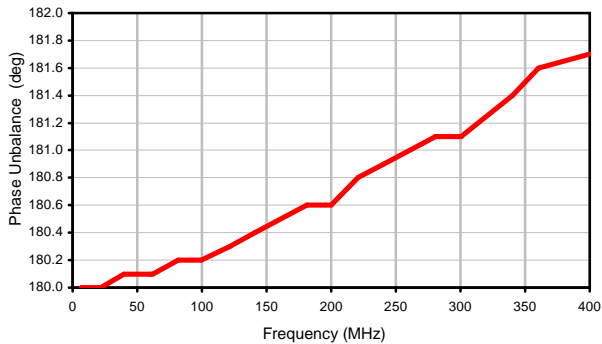


Isolation @ 0 mA

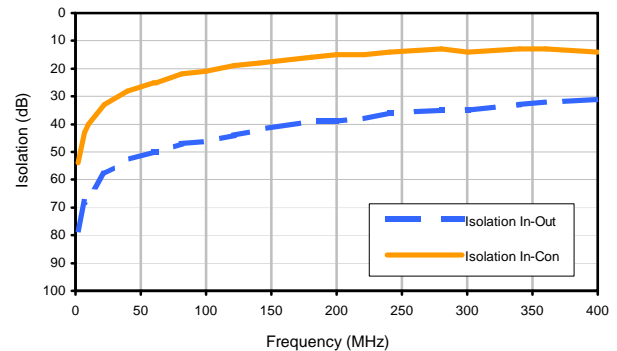


Return Loss Input

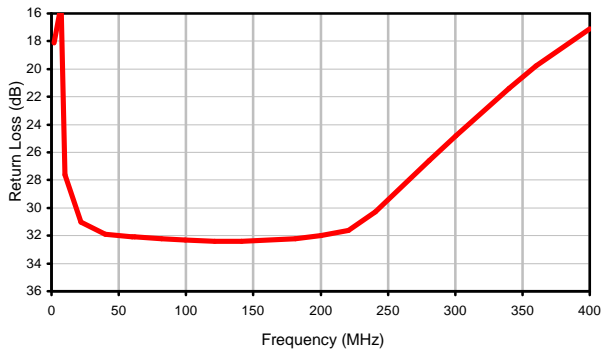


Attenuation

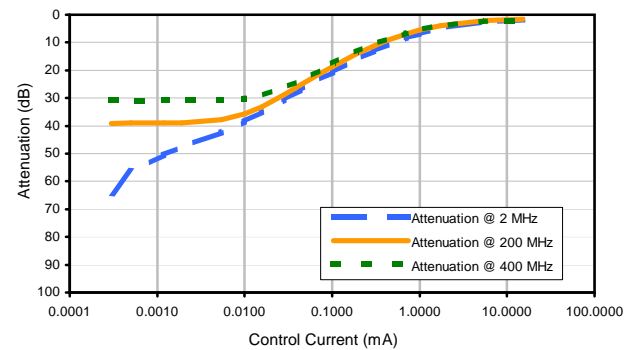

Phase Unbalance ref @ 15 mA

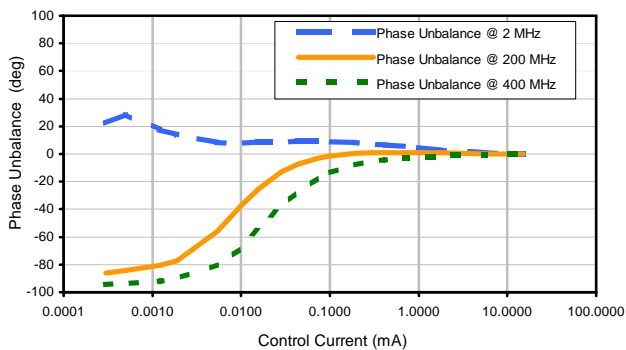


Input VSWR

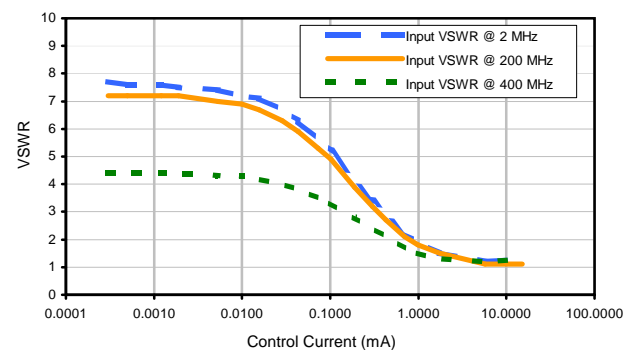


## Outline Dimensions

### NNN150

NOTE: BLUE BEAD INDICATES PIN #1.  
PIN NUMBERS DO NOT APPEAR  
ON UNIT.FOR REFERENCE ONLY.

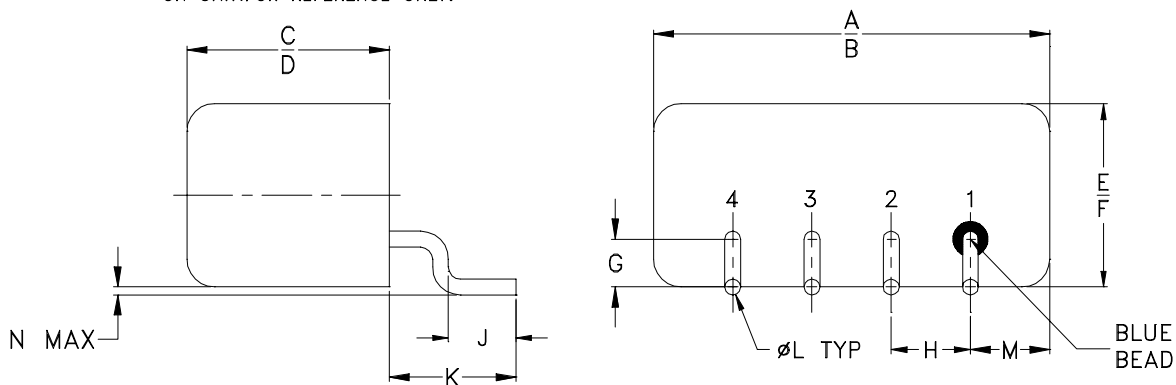

### PCB Land Pattern

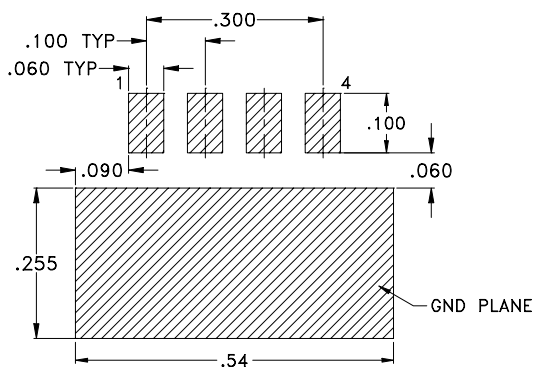

Suggested Layout,  
Tolerance to be within  $\pm .002$

CASE #.	A	B	C	D	E	F	G	H	J	K	L	M	N	WT, GRAM
NNN150	.50 (12.70)	.48 (12.19)	.255 (6.48)	.240 (6.10)	.23 (5.84)	.21 (5.33)	.06 (1.52)	.100 (2.54)	.09 (2.29)	.16 (4.06)	.020 (0.51)	.09 (2.29)	.005 (0.13)	1.9

Dimensions are in inches (mm). Tolerances: 2 Pl.  $\pm .03$ ; 3 Pl.  $\pm .015$

#### Notes:

- Header material C.R.S. Pin material #52 alloy.
- Finish: Electro-Tin, hot-oil flowed or electro-Tin-Silver.
- Cover material: Cupro-Nickel.
- Pin's meniscus 0.015 inch max.
- Special Tolerances: Pin diameter  $\pm .005$  inch.




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

# Tape & Reel Packaging TR-F9

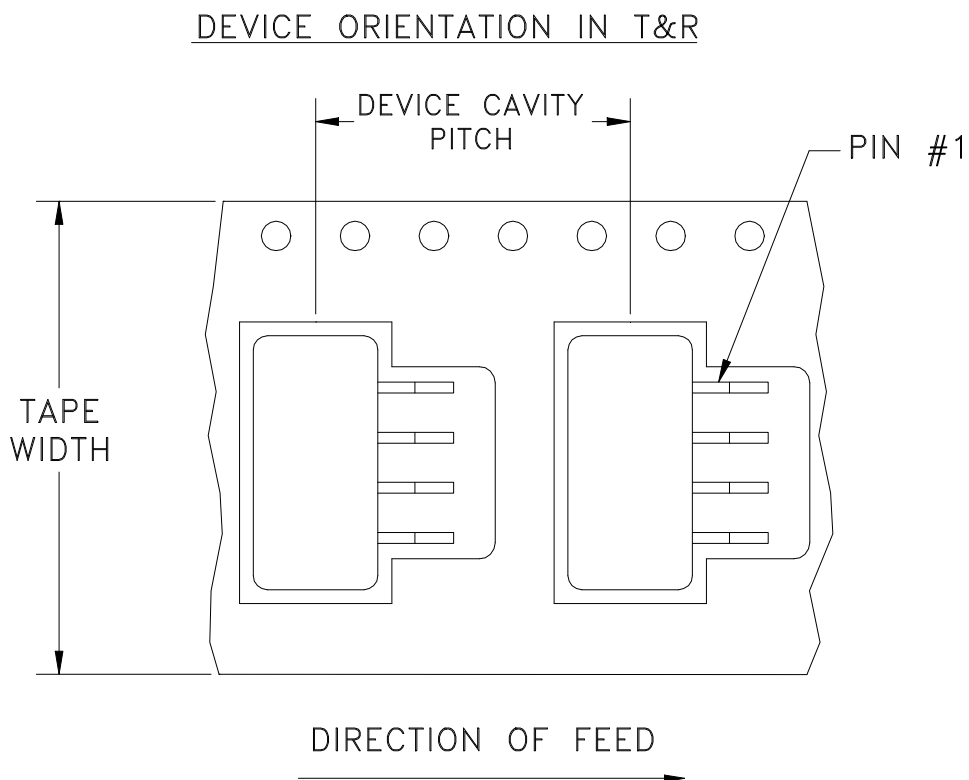

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel
24	16	13	500

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: [www.minicircuits.com/pages/pdfs/tape.pdf](http://www.minicircuits.com/pages/pdfs/tape.pdf)




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M86549	NEW RELEASE	04/15/03	GF	DJ
A	M102713	UPDATED NOTES & DISCRPTION	01/14/06	GF	IL

**SUGGESTED MOUNTING CONFIGURATION  
FOR NNN150 CASE STYLE, "z"/"cm" PIN CONNECTIONS.**

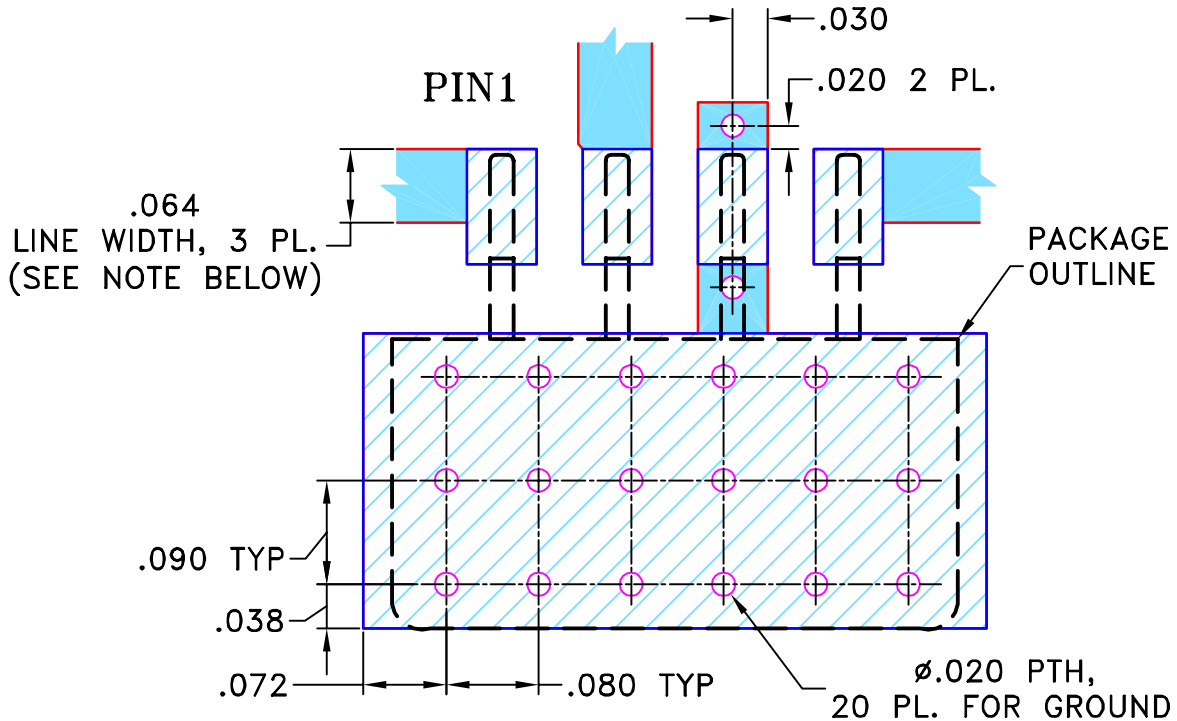

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED	INITIALS	DATE
DIMENSIONS ARE IN INCHES	DRAWN GF	04/11/03
TOLERANCES ON:	CHECKED AV	04/15/03
2 PL DECIMALS ±	APPROVED DJ	04/15/03
3 PL DECIMALS ± .005		
ANGLES ±		
FRACTIONS ±		


**Mini-Circuits®** 13 Neptune Avenue  
Brooklyn NY 11235

PL, z/cm NNN150, TUF/TFAS-SM, TB-201


Mini-Circuits®  
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-081	A
FILE:	98PL081	SCALE:	SHEET:
		6:1	1 OF 1

# Evaluation Board and Circuit

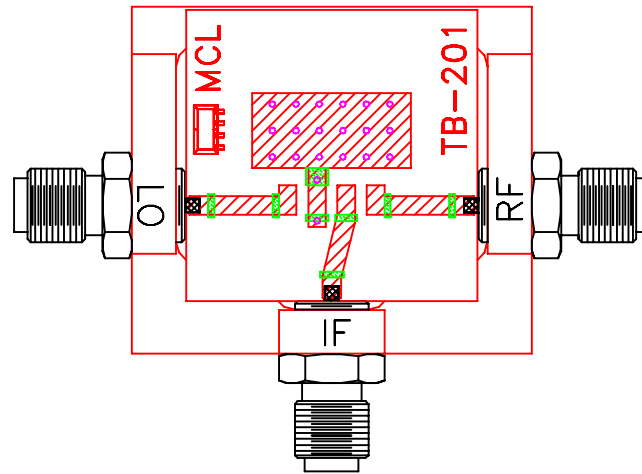


TB-201

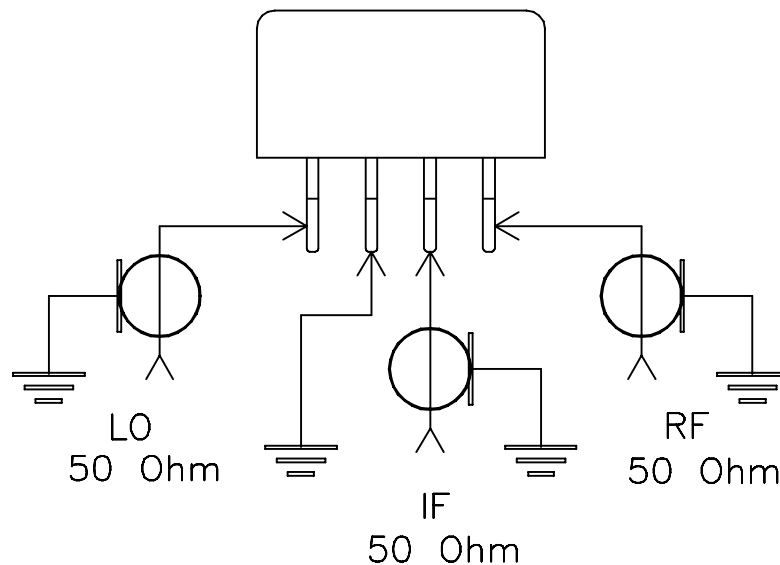

Schematic Diagram

## Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,  
Dielectric Constant=3.5, Thickness=.030 inch.

 Mini-Circuits®

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Moisture Resistance	10 cycles, 24 hours per cycle	MIL-STD-202, Method 106, Condition A, except 50°C and end point electrical test done within 12 hours
Solderability	10X Magnification	J-STD-002, 95% Coverage
Resistance to Solder Heat	260°C for 10 seconds	MIL-STD-202, Method 210, Condition B
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215
Terminal Strength	4 1/2 Pound Pull	MIL-STD-202, Method 211, Condition A





All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
---------------	---------------------------	----------------

Barometric Pressure

100,000 Feet

MIL-STD-202, Method 105, Condition D