

Precision

# Digital Step Attenuator

## TOAT-3610+

50Ω TTL Control, Pin Diode 10 to 1000 MHz

### Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 125°C
Input Power	15 dBm
DC Voltage	5.5 V
TTL	5.5V

Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

RF IN	4
RF OUT	11
TTL CONTROL #1	2
TTL CONTROL #2	3
TTL CONTROL #3	1
+5V DC	12
CASE GROUND	5,6,7,8,9,10

### Outline Drawing

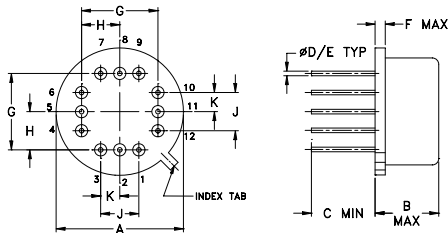

### Outline Dimensions (inch/mm)

A	B	C	D	E	F
.600	.250	.25	.016	.020	.04
15.24	6.35	6.35	0.41	0.51	1.02
G	H	J	K		wt
.400	.200	.200	.100		grams
10.16	5.08	5.08	2.54		4.0

### Features

- wideband, 10 to 1000 MHz
- excellent step accuracy, 0.2 dB typ.
- excellent VSWR 1.3 typ.
- low DC current, 6 mA typ.
- hermetic, metal, TO-8 case

### Applications

- base stations
- cellular
- test-sets
- military, hi-rel applications

### Digital Step Attenuator Electrical Specifications

MODEL NO.	FREQUENCY (MHz)		PRIMARY ATTENUATION STEPS (dB)			ATTENUATION (dB)		VSWR (:1)		
	$f_L$	$f_U$	#1	#2	#3	(1,1,1)** Nom.	(0,0,0) Max.	L	M	U
TOAT-3610+	10	1000	3±0.3	6±0.4	10±0.4	19.0	4.0	1.6	1.4	1.5

L=10 to 100 MHz      M=100 to 500 MHz      U=500 to 1000 MHz


\*\* Total attenuation above thru-loss.

1. Step accuracy is specified for basic steps. For combination of steps accuracy is additive.
2. Thru-loss is minimum insertion loss with all attenuation elements bypassed (All TTL controls state are Low)
3. For optimum operation of TOAT models, ensure the device case is properly connected to the ground plane (of PC board)

### Additional Specifications

DC Voltage	+5V
DC Current	12mA max.
Switching Time (50% TTL to within specified accuracy of the next-selected attenuation step, and to within 0.1 dB of steady-state Thru-Loss)	10µs typ., 15µs max.,
TTL Input High Threshold	2V min
TTL Input Low Threshold	0.8V max.
TTL Toggle Rate	50 kHz typ.
1dB Compression	0 dBm (10-100 MHz) +10 dBm (100-1000MHz)

### Electrical Schematic

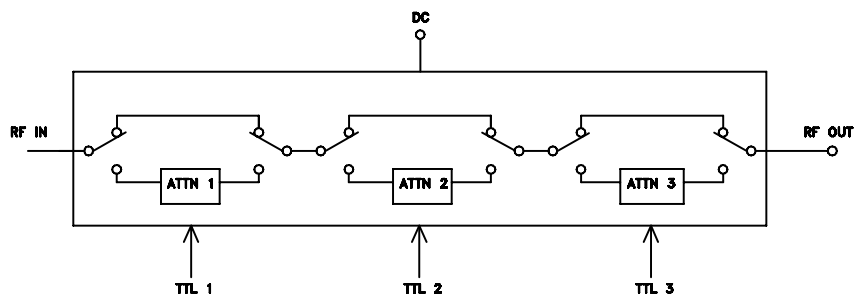

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com






Generic photo used for illustration purposes only

CASE STYLE: QQ96

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

REV. B  
M151107  
TOAT-3610+  
DJ/VV/CP/AM  
151008

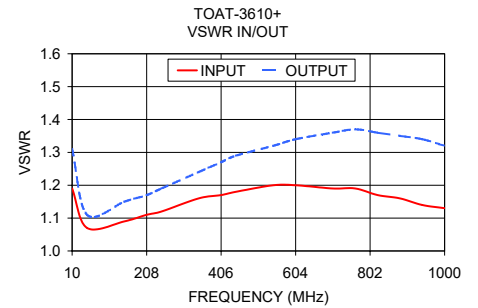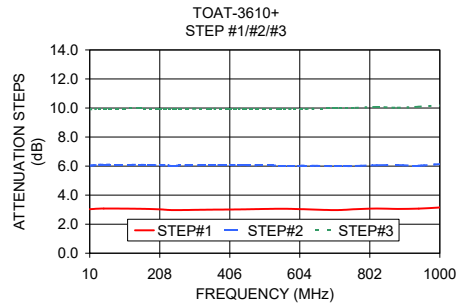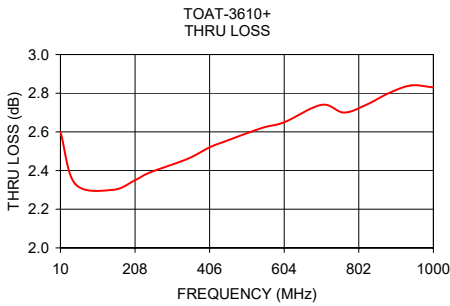

### Step Attenuation\* at TTL Control State

FREQ. (MHz)	000 (dB)	001 (dB)	010 (dB)	011 (dB)	100 (dB)	101 (dB)	110 (dB)	111 (dB)
10.00	2.60	3.03	6.03	9.12	9.91	13.02	16.00	19.02
49.60	2.33	3.08	6.10	9.15	9.95	13.03	15.97	19.03
148.60	2.30	3.06	6.09	9.12	9.97	12.98	16.03	19.03
208.00	2.35	3.02	6.06	9.06	9.94	12.97	16.03	19.01
247.60	2.39	2.97	6.04	9.04	9.94	12.99	15.93	19.04
346.60	2.46	3.00	6.07	9.05	9.95	12.95	16.02	19.00
406.00	2.52	3.01	6.07	9.04	9.93	12.94	15.99	18.94
445.60	2.55	3.02	6.06	9.00	9.95	12.95	15.98	18.82
544.60	2.62	3.06	6.04	9.01	9.95	12.98	16.02	18.98
604.00	2.65	3.04	6.04	8.94	9.93	13.00	15.97	18.94
703.00	2.74	2.97	6.00	8.94	9.99	12.94	15.91	18.89
762.40	2.70	3.03	6.01	8.97	10.01	12.96	16.00	18.91
821.80	2.74	3.08	6.06	9.05	10.07	13.08	16.07	18.97
881.20	2.80	3.05	6.07	9.01	10.02	13.11	15.98	19.00
940.60	2.84	3.07	6.03	9.04	10.09	13.15	16.13	19.01
1000.00	2.83	3.15	6.14	9.07	10.18	13.25	16.08	19.24

### INPUT VSWR

FREQ. (MHz)	001	010	011	100	101	110	111
10.00	1.19	1.22	1.14	1.28	1.17	1.21	1.14
49.60	1.07	1.08	1.05	1.11	1.07	1.08	1.05
148.60	1.09	1.09	1.06	1.13	1.08	1.08	1.05
208.00	1.11	1.11	1.07	1.15	1.09	1.10	1.07
247.60	1.12	1.12	1.08	1.17	1.10	1.11	1.08
346.60	1.16	1.15	1.11	1.20	1.13	1.13	1.10
406.00	1.17	1.16	1.12	1.23	1.15	1.15	1.12
445.60	1.18	1.18	1.13	1.24	1.16	1.16	1.13
544.60	1.20	1.20	1.15	1.27	1.18	1.19	1.15
604.00	1.20	1.21	1.16	1.29	1.19	1.20	1.17
703.00	1.19	1.21	1.18	1.30	1.20	1.22	1.19
762.40	1.19	1.21	1.19	1.30	1.20	1.22	1.20
821.80	1.17	1.22	1.20	1.31	1.20	1.23	1.21
881.20	1.16	1.21	1.20	1.30	1.20	1.24	1.22
940.60	1.14	1.21	1.21	1.29	1.19	1.24	1.23
1000.00	1.13	1.21	1.22	1.28	1.19	1.25	1.24

### OUTPUT VSWR

FREQ. (MHz)	001	010	011	100	101	110	111
10.00	1.31	1.24	1.22	1.12	1.11	1.11	1.10
49.60	1.11	1.09	1.08	1.05	1.05	1.04	1.05
148.60	1.15	1.11	1.10	1.07	1.07	1.06	1.06
208.00	1.17	1.11	1.11	1.07	1.07	1.07	1.06
247.60	1.19	1.13	1.13	1.09	1.09	1.09	1.08
346.60	1.24	1.17	1.17	1.13	1.12	1.12	1.12
406.00	1.27	1.21	1.21	1.15	1.15	1.14	1.14
445.60	1.29	1.21	1.19	1.14	1.15	1.15	1.14
544.60	1.32	1.25	1.24	1.19	1.19	1.18	1.19
604.00	1.34	1.26	1.26	1.20	1.19	1.20	1.20
703.00	1.36	1.28	1.28	1.22	1.24	1.23	1.23
762.40	1.37	1.29	1.31	1.24	1.25	1.26	1.27
821.80	1.36	1.31	1.33	1.25	1.26	1.26	1.28
881.20	1.35	1.30	1.31	1.26	1.26	1.26	1.27
940.60	1.34	1.32	1.35	1.29	1.30	1.30	1.30
1000.00	1.32	1.33	1.35	1.29	1.30	1.30	1.33

\* Step attenuation above thru-loss (TTL logic 000)

#### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/WCLStore/terms.jsp](http://www.minicircuits.com/WCLStore/terms.jsp)



# Digital Step Attenuator

# TOAT-3610+

## Typical Performance Data

FREQUENCY (MHz)	STEP ATTENUATION* AT TTL CONTROL STATE (dB)							
	000 THRU LOSS	001 3 dB	010 6 dB	011 9 dB	100 10 dB	101 13 dB	110 16 dB	111 19 dB
10.0	2.60	3.03	6.03	9.12	9.91	13.02	16.00	19.02
49.6	2.33	3.08	6.10	9.15	9.95	13.03	15.97	19.03
148.6	2.30	3.06	6.09	9.12	9.97	12.98	16.03	19.03
208.0	2.35	3.02	6.06	9.06	9.94	12.97	16.03	19.01
247.6	2.39	2.97	6.04	9.04	9.94	12.99	15.93	19.04
346.6	2.46	3.00	6.07	9.05	9.95	12.95	16.02	19.00
406.0	2.52	3.01	6.07	9.04	9.93	12.94	15.99	18.94
445.6	2.55	3.02	6.06	9.00	9.95	12.95	15.98	18.82
544.6	2.62	3.06	6.04	9.01	9.95	12.98	16.02	18.98
604.0	2.65	3.04	6.04	8.94	9.93	13.00	15.97	18.94
703.0	2.74	2.97	6.00	8.94	9.99	12.94	15.91	18.89
762.4	2.70	3.03	6.01	8.97	10.01	12.96	16.00	18.91
821.8	2.74	3.08	6.06	9.05	10.07	13.08	16.07	18.97
881.2	2.80	3.05	6.07	9.01	10.02	13.11	15.98	19.00
940.6	2.84	3.07	6.03	9.04	10.09	13.15	16.13	19.01
1000.0	2.83	3.15	6.14	9.07	10.18	13.25	16.08	19.24

\* Step Attenuation above Thru Loss (TTL Logic 000).

FREQUENCY (MHz)	INPUT VSWR AT TTL CONTROL STATE (:1)						
	001 3 dB	010 6 dB	011 9 dB	100 10 dB	101 13 dB	110 16 dB	111 19 dB
10.0	1.19	1.22	1.14	1.28	1.17	1.21	1.14
49.6	1.07	1.08	1.05	1.11	1.07	1.08	1.05
148.6	1.09	1.09	1.06	1.13	1.08	1.08	1.05
208.0	1.11	1.11	1.07	1.15	1.09	1.10	1.07
247.6	1.12	1.12	1.08	1.17	1.10	1.11	1.08
346.6	1.16	1.15	1.11	1.20	1.13	1.13	1.10
406.0	1.17	1.16	1.12	1.23	1.15	1.15	1.12
445.6	1.18	1.18	1.13	1.24	1.16	1.16	1.13
544.6	1.20	1.20	1.15	1.27	1.18	1.19	1.15
604.0	1.20	1.21	1.16	1.29	1.19	1.20	1.17
703.0	1.19	1.21	1.18	1.30	1.20	1.22	1.19
762.4	1.19	1.21	1.19	1.30	1.20	1.22	1.20
821.8	1.17	1.22	1.20	1.31	1.20	1.23	1.21
881.2	1.16	1.21	1.20	1.30	1.20	1.24	1.22
940.6	1.14	1.21	1.21	1.29	1.19	1.24	1.23
1000.0	1.13	1.21	1.22	1.28	1.19	1.25	1.24

FREQUENCY (MHz)	OUTPUT VSWR AT TTL CONTROL STATE (:1)						
	001 3 dB	010 6 dB	011 9 dB	100 10 dB	101 13 dB	110 16 dB	111 19 dB
10.0	1.31	1.24	1.22	1.12	1.11	1.11	1.10
49.6	1.11	1.09	1.08	1.05	1.05	1.04	1.05
148.6	1.15	1.11	1.10	1.07	1.07	1.06	1.06
208.0	1.17	1.11	1.11	1.07	1.07	1.07	1.06
247.6	1.19	1.13	1.13	1.09	1.09	1.09	1.08
346.6	1.24	1.17	1.17	1.13	1.12	1.12	1.12
406.0	1.27	1.21	1.21	1.15	1.15	1.14	1.14
445.6	1.29	1.21	1.19	1.14	1.15	1.15	1.14
544.6	1.32	1.25	1.24	1.19	1.19	1.18	1.19
604.0	1.34	1.26	1.26	1.20	1.19	1.20	1.20
703.0	1.36	1.28	1.28	1.22	1.24	1.23	1.23
762.4	1.37	1.29	1.31	1.24	1.25	1.26	1.27
821.8	1.36	1.31	1.33	1.25	1.26	1.26	1.28
881.2	1.35	1.30	1.31	1.26	1.26	1.26	1.27
940.6	1.34	1.32	1.35	1.29	1.30	1.30	1.30
1000.0	1.32	1.33	1.35	1.29	1.30	1.30	1.33

REV. X1  
TOAT-3610+  
061207  
Page 1 of 1



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant  
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




# Digital Step Attenuator


## Typical Performance Curves

TOAT-3610+


Thru Loss

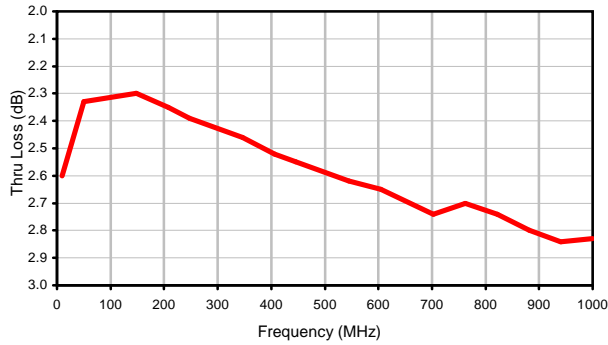


Step Attenuation

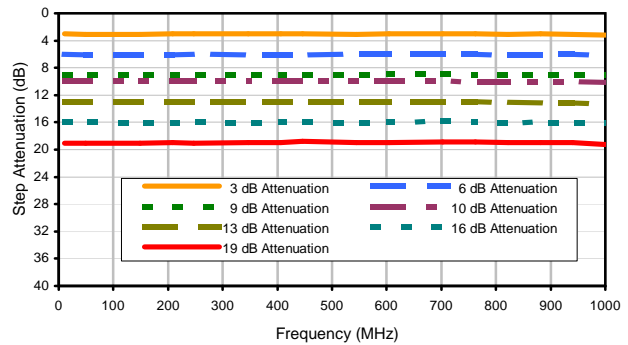

Input VSWR

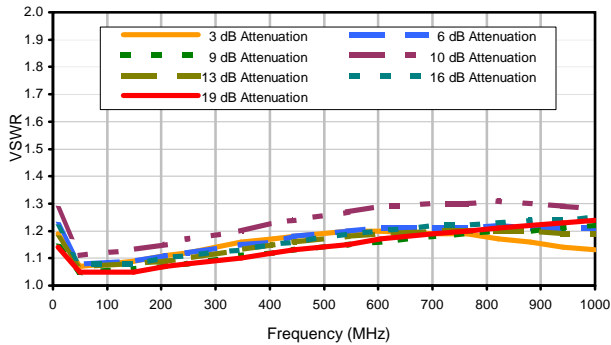

Output VSWR

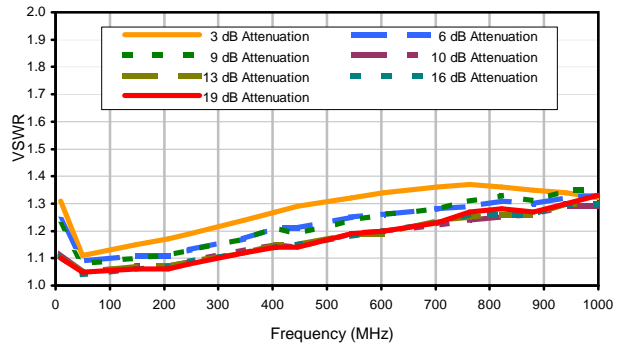

REV. X1  
TOAT-3610+  
061207  
Page 1 of 1



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant  
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




# Case Style

# QQ

QQ95  
QQ96

## Outline Dimensions

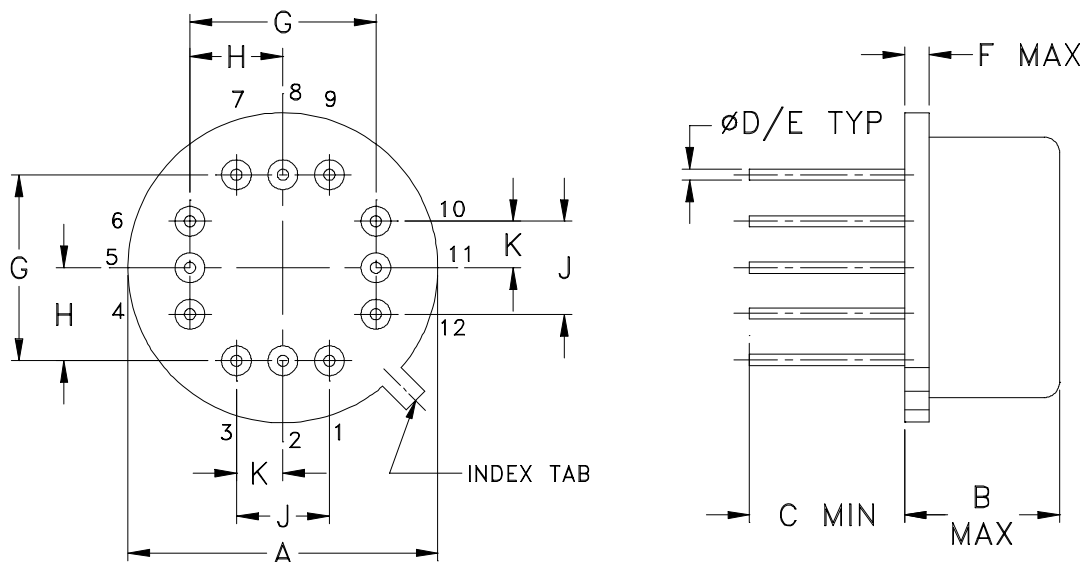

CASE#	A	B	C	D	E	F	G	H	J	K	WT. GRAM
QQ95	.500 (12.70)	.250 (6.35)	.25 (6.35)	.016 (.41)	.020 (.51)	.04 (1.02)	.300 (7.62)	.150 (3.81)	.150 (3.81)	.075 (1.91)	3.5
QQ96	.600 (15.24)	.250 (6.35)	.25 (6.35)	.016 (.41)	.020 (.51)	.04 (1.02)	.400 (10.16)	.200 (5.08)	.200 (5.08)	.100 (2.54)	4.0

Dimensions are in inches (mm). Tolerances: 2 Pl.  $\pm .03$ ; 3 Pl.  $\pm .015$

### Notes:

- Header material: Kovar.  
Pin material: Kovar.  
Cover material: Nickel.
- Pin finish: Gold plate 25  $\mu$  inches (.64 microns) min.
- For pin designations see specification data sheet.
- Pin numbers do not appear on unit, for reference only.

**Mini-Circuits**<sup>®</sup>

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 10 cycles	MIL-STD-202, Method 107, Condition A, except +100°C & 10 cycles
Constant Acceleration	5000g, Y1 axis	MIL-STD-883, Method 2001, Condition A, except Y1 axis only
Solderability	10X Magnification	J-STD-002, 95% Coverage
Resistance to Solder Heat	260°C for 10 seconds	MIL-STD-202, Method 210, Condition B
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215
Gross Leak	125°C Bubble Test	MIL-STD-202, Method 112, Condition D