

# Coaxial Matching Pad

## UNMP-R5075-33+

50/75Ω

DC to 3000 MHz



Generic photo used for illustration purposes only  
CASE STYLE: FF779

## The Big Deal

- Minimum loss pad
- Wideband coverage, DC to 3000 MHz
- Excellent VSWR

## Product Overview

Mini-Circuits' UNMP-R5075-33+ is a coaxial 50/75Ω matching pad covering the DC to 3000 MHz frequency range, supporting impedance matching in a wide range of systems. This model is ideal for 50/75Ω impedance matching in systems where minimizing overall signal loss is a priority. The matching pad housed in a rugged unibody construction with N-Male (50Ω) to N-Female (75Ω) connectors.

## Key Features

Feature	Advantages
Wideband, DC to 3000 MHz	Supports a wide variety of applications including CATV and DOCSIS® 3.1 systems and equipment.
Compact size, 0.68" x 2.11" x 0.71"	Accommodates tight space requirements for crowded system layouts.
Connectorized package N-Male (50Ω) to N-Female (75Ω) connectors	Supports connections between components with different connector types.

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Coaxial Matching Pad

50/75Ω

DC to 3000 MHz

## UNMP-R5075-33+



Generic photo used for illustration purposes only

CASE STYLE: FF779

Connectors	Model
50ΩM-N	UNMP-R5075-33+
75ΩF-N	

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Maximum Ratings

Operating Temperature	-45°C to 100°C
Storage Temperature	-55°C to 100°C
Input Power	2W

Permanent damage may occur if any of these limits are exceeded.

### Features

- Minimum loss pad
- Wideband coverage, DC to 3000 MHz
- Excellent VSWR
- Rugged unibody construction


### Applications

- Impedance matching

### Coaxial Connections

Input	N-Male
Output	N-Female

### Outline Drawing

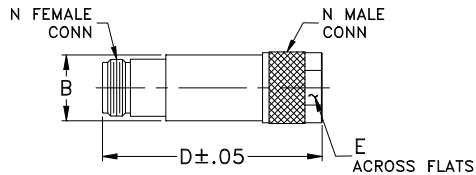

### Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Frequency Range		DC	--	3000	MHz	
Attenuation <sup>1</sup>	Nominal	DC-3000	--	5.7	--	
	Flatness <sup>2</sup>	DC-3000	--	±0.15	--	
		DC-100	--	--	0.2	dB
		100-1000	--	--	0.3	
VSWR		DC-100	--	1.01	1.10	
		100-1000	--	1.05	1.10	:1
		1000-3000	--	1.1	1.20	
Input Power	DC-3000	--	--	2	W	

1. Attenuation varies by 0.3 dB max. over temperature
2. Flatness= variation over band divided by 2

### Typical Performance Data 25°C




Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	
		50 Ω	75 Ω
10	5.77	1.01	1.00
50	5.78	1.01	1.00
100	5.79	1.00	1.00
300	5.82	1.00	1.01
500	5.84	1.01	1.01
800	5.86	1.02	1.02
950	5.86	1.02	1.03
1000	5.86	1.02	1.03
1200	5.87	1.03	1.04
1500	5.87	1.04	1.05
1800	5.87	1.06	1.06
2000	5.87	1.06	1.07
2300	5.87	1.07	1.07
2500	5.86	1.08	1.08
2800	5.84	1.08	1.08
3000	5.82	1.08	1.08

### Outline Dimensions (inch mm)

A	B	C	D	E	Wt.
--	.71	--	2.11	.718	grams
--	18.03	--	53.59	18.24	72.5

Note: Please refer to case style drawing for details

### Electical Schematic

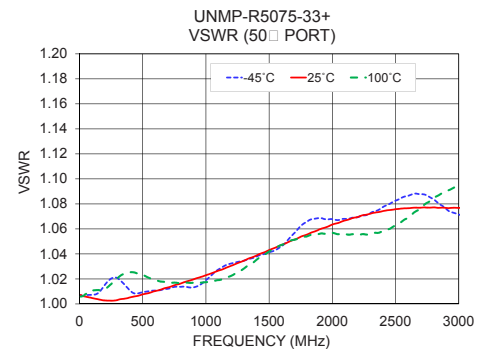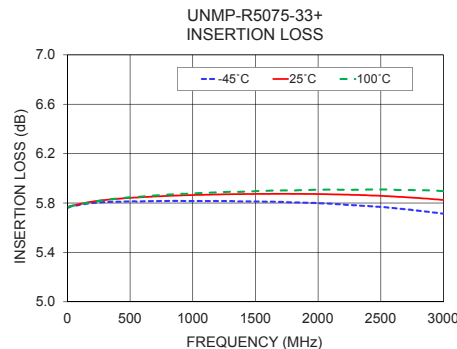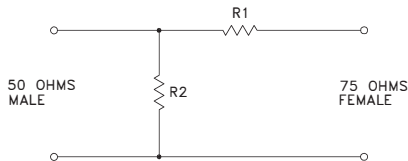

#### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/VCLStore/terms.jsp](http://www.minicircuits.com/VCLStore/terms.jsp)



[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A  
ECO-005139  
UNMP-R5075-33+  
EDU2639  
URJ  
201127  
Page 2 of 2


## Typical Performance Data

TEST CONDITIONS: INPUT POWER = -10dBm


FREQ. (MHz)	INSERTION LOSS			50Ω VSWR			75Ω VSWR		
	(dB)			(:1)			(:1)		
	@-45°C	@+25°C	@+100°C	@-45°C	@+25°C	@+100°C	@-45°C	@+25°C	@+100°C
10	5.76	5.77	5.77	1.01	1.01	1.01	1.00	1.00	1.00
50	5.77	5.78	5.78	1.01	1.01	1.01	1.01	1.00	1.01
100	5.79	5.79	5.79	1.01	1.01	1.01	1.02	1.00	1.01
150	5.79	5.80	5.80	1.01	1.01	1.01	1.02	1.01	1.00
200	5.80	5.81	5.81	1.02	1.02	1.01	1.03	1.01	1.01
250	5.80	5.82	5.82	1.02	1.02	1.02	1.03	1.01	1.02
300	5.81	5.82	5.82	1.02	1.02	1.02	1.02	1.01	1.02
350	5.81	5.83	5.83	1.02	1.02	1.02	1.02	1.01	1.03
400	5.81	5.83	5.84	1.01	1.01	1.03	1.01	1.01	1.03
450	5.81	5.84	5.84	1.01	1.01	1.02	1.01	1.01	1.03
500	5.81	5.84	5.85	1.01	1.01	1.02	1.01	1.01	1.03
550	5.81	5.84	5.85	1.01	1.01	1.02	1.01	1.01	1.03
600	5.81	5.85	5.85	1.01	1.01	1.02	1.01	1.02	1.03
650	5.82	5.85	5.86	1.01	1.01	1.02	1.01	1.02	1.03
700	5.82	5.85	5.86	1.01	1.01	1.02	1.01	1.02	1.03
750	5.82	5.85	5.86	1.01	1.01	1.02	1.01	1.02	1.03
800	5.82	5.86	5.87	1.01	1.01	1.02	1.02	1.02	1.03
850	5.82	5.86	5.87	1.01	1.01	1.02	1.02	1.02	1.03
900	5.82	5.86	5.87	1.01	1.01	1.02	1.02	1.03	1.03
950	5.82	5.86	5.88	1.01	1.01	1.02	1.02	1.03	1.04
1000	5.82	5.86	5.88	1.02	1.02	1.02	1.02	1.03	1.03
1050	5.82	5.87	5.88	1.02	1.02	1.02	1.03	1.03	1.04
1100	5.82	5.87	5.88	1.03	1.03	1.02	1.03	1.03	1.04
1150	5.82	5.87	5.89	1.03	1.03	1.02	1.03	1.03	1.04
1200	5.82	5.87	5.89	1.03	1.03	1.02	1.03	1.04	1.03
1250	5.82	5.87	5.89	1.03	1.03	1.03	1.04	1.04	1.03
1300	5.82	5.87	5.89	1.03	1.03	1.03	1.04	1.04	1.03
1350	5.81	5.87	5.89	1.04	1.04	1.03	1.04	1.04	1.03
1400	5.81	5.87	5.89	1.04	1.04	1.04	1.04	1.04	1.03
1450	5.81	5.87	5.89	1.04	1.04	1.04	1.05	1.05	1.03
1500	5.81	5.87	5.90	1.04	1.04	1.04	1.05	1.05	1.03
1550	5.81	5.87	5.90	1.04	1.04	1.04	1.06	1.05	1.03
1600	5.81	5.87	5.90	1.05	1.05	1.05	1.06	1.05	1.03
1650	5.81	5.87	5.90	1.05	1.05	1.05	1.06	1.05	1.04
1700	5.81	5.87	5.90	1.06	1.06	1.05	1.06	1.06	1.04
1750	5.81	5.87	5.90	1.06	1.06	1.05	1.06	1.06	1.04
1800	5.80	5.87	5.90	1.07	1.07	1.05	1.06	1.06	1.04
1850	5.80	5.87	5.90	1.07	1.07	1.06	1.07	1.06	1.05
1900	5.80	5.87	5.90	1.07	1.07	1.06	1.07	1.06	1.05
1950	5.80	5.87	5.91	1.07	1.07	1.06	1.07	1.06	1.05
2000	5.80	5.87	5.91	1.07	1.07	1.06	1.07	1.07	1.06
2050	5.80	5.87	5.91	1.07	1.07	1.06	1.07	1.07	1.06
2100	5.80	5.87	5.91	1.07	1.07	1.06	1.07	1.07	1.07
2150	5.79	5.87	5.91	1.07	1.07	1.06	1.07	1.07	1.07
2200	5.79	5.87	5.91	1.07	1.07	1.06	1.07	1.07	1.08
2250	5.78	5.87	5.91	1.07	1.07	1.06	1.07	1.07	1.07
2300	5.78	5.87	5.91	1.07	1.07	1.06	1.07	1.07	1.08
2350	5.78	5.86	5.91	1.07	1.07	1.06	1.07	1.08	1.08
2400	5.78	5.86	5.91	1.08	1.08	1.06	1.07	1.08	1.09
2500	5.77	5.86	5.91	1.08	1.08	1.06	1.07	1.08	1.10
2550	5.76	5.86	5.91	1.09	1.09	1.07	1.07	1.08	1.10
2600	5.76	5.85	5.91	1.09	1.09	1.07	1.07	1.08	1.11
2650	5.75	5.85	5.91	1.09	1.09	1.07	1.07	1.08	1.11
2700	5.75	5.85	5.91	1.09	1.09	1.08	1.06	1.08	1.11
2750	5.74	5.84	5.91	1.09	1.09	1.08	1.06	1.08	1.11
2800	5.74	5.84	5.90	1.08	1.08	1.08	1.06	1.08	1.12
2850	5.73	5.84	5.90	1.08	1.08	1.09	1.05	1.08	1.12
2900	5.72	5.83	5.90	1.08	1.08	1.09	1.06	1.08	1.12
2950	5.72	5.83	5.90	1.07	1.07	1.09	1.05	1.08	1.12
3000	5.71	5.82	5.90	1.07	1.07	1.09	1.06	1.08	1.12

## Typical Performance Curves


**Attenuation Vs. Frequency & Temperature**  
INPUT POWER = -10 dBm

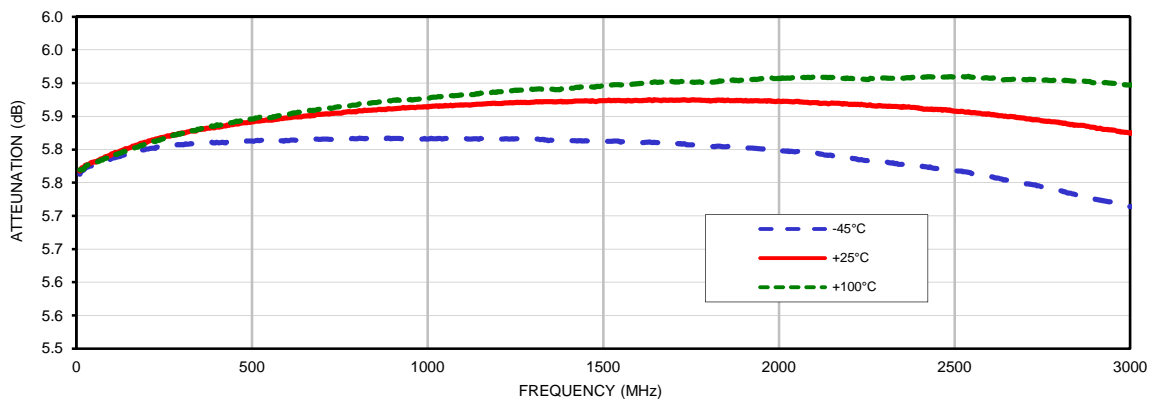

**50-Ohm VSWR Vs. Frequency & Temperature**  
INPUT POWER = -10 dBm

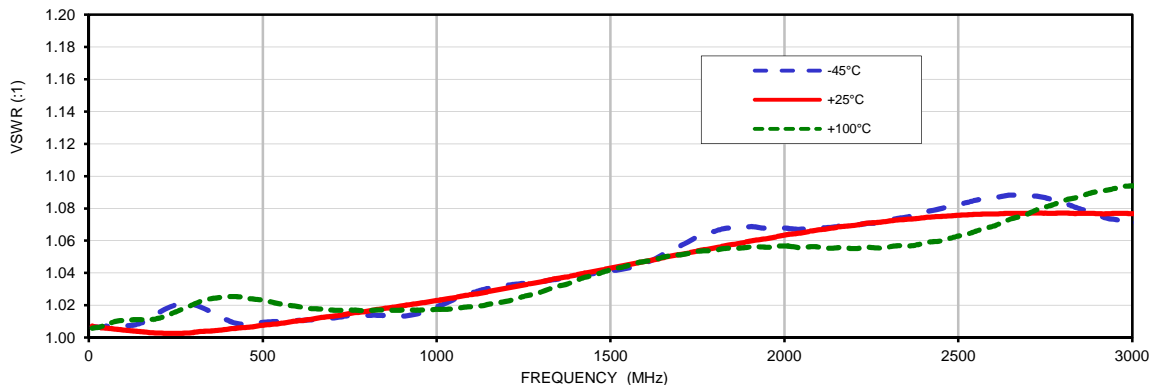

**75-Ohm VSWR Vs. Frequency & Temperature**  
INPUT POWER = -10 dBm

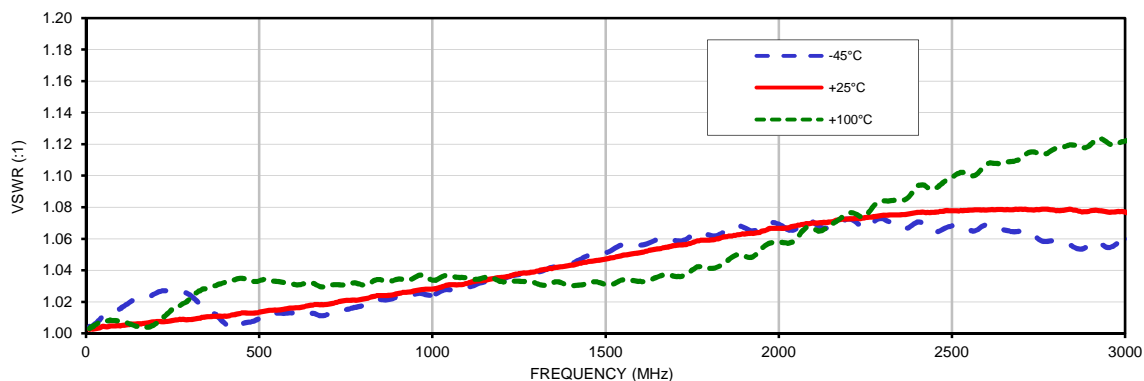


# Case Style

# FF

## Outline Dimensions

### FF779

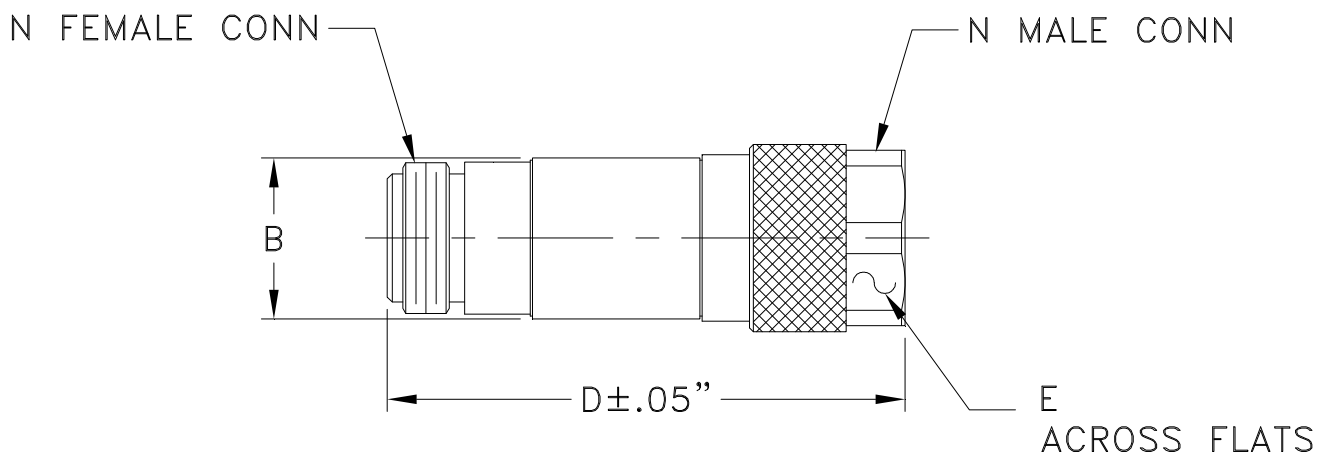

CASE #.	A	B	C	D	E	WT GRAMS
FF779	--	.71 (18.03)	--	2.11 (53.59)	.718 (18.24)	72.5

Dimensions are in inches (mm). Tolerances: 2Pl. +.05/-.04; 3Pl. ± .030

### Notes:

1. Case material: Brass.
2. Case finish: Nickel plate.

 **Mini-Circuits**<sup>®</sup>  
ISO 9001 ISO 14001 CERTIFIED

ALL NEW  
  
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS

FF779 Rev.: AR (13/AUG/21) ECO-009237 File: FF779

This document and its contents are the property of Mini-Circuits.

Sheet 1 of 1



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

<b>Specification</b>	<b>Test/Inspection Condition</b>	<b>Reference/Spec</b>
Operating Temperature	-45° to 100° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I