



COAXIAL

# Armored Flexible Cable

## WBL-0.5FT-W1F+

50Ω DC to 110 GHz 6 Inches 1.0 mm-Female to 1.0 mm-Female

### KEY FEATURES

- Ultra-wideband DC to 110 GHz
- Low insertion loss, 2.5 dB, typ.
- Excellent return loss, 26.4 dB, typ.
- Strong protective jacket



Generic photo used for illustration purposes only

### APPLICATIONS

- Optical communications
- Test & Measurement
- High-speed data systems
- Instrumentation
- Precision Measurement

**HANDLING INSTRUCTIONS**  
 1.0 mm connectors require specific handling and torque values. See Mini-Circuits Application Note AN-71-001 for detail.

### PRODUCT OVERVIEW

WBL-0.5FT-W1F+ cable is ideal for interconnecting coaxial components and subassemblies in a wide range of systems, including test and measurement, instrumentation, and more. This braided flexible cable provides a minimum bend radius of 26 mm to accommodate tight layouts without the need for bending tools, adapters or brackets.

### ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (GHz)	Min.	Typ.	Max.	Units
Frequency Range		DC	-	110	GHz
Length		6			inches
Insertion Loss	DC - 35	-	0.8	3.7	dB
	35 - 75	-	1.8	3.7	
	75 - 110	-	2.5	3.7	
Return Loss	DC - 35	14.0	31.3	-	dB
	35 - 75	14.0	24.9	-	
	75 - 110	14.0	26.4	-	

### ABSOLUTE MAXIMUM RATINGS<sup>1</sup>

Operating Case Temperature	-45°C to +80°C
Storage Temperature	-45°C to +80°C
Average Power Handling at Sea Level	14.4 W at 6 GHz
	7.9 W at 18 GHz
	5.0 W at 40 GHz
	3.6 W at 67 GHz
	2.7 W at 110 GHz

1. Permanent damage may occur if any of these limits are exceeded.

REV. OR  
 ECO-023939  
 WBL-0.5FT-W1F+  
 MCL NY  
 241212





COAXIAL



# Armored Flexible Cable

**WBL-0.5FT-W1F+**

Mini-Circuits

50Ω DC to 110 GHz 6 Inches 1.0 mm-Female to 1.0 mm-Female

## TYPICAL PERFORMANCE GRAPHS

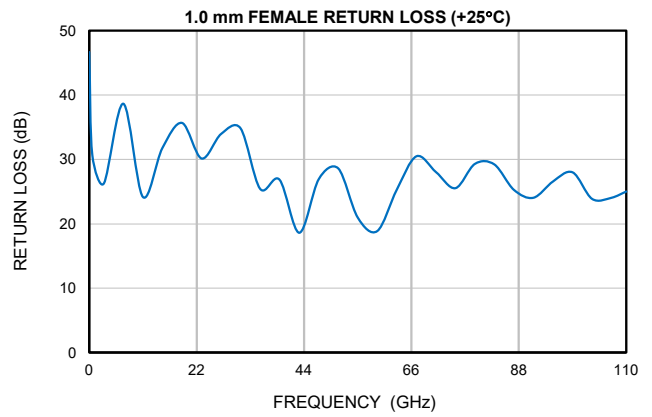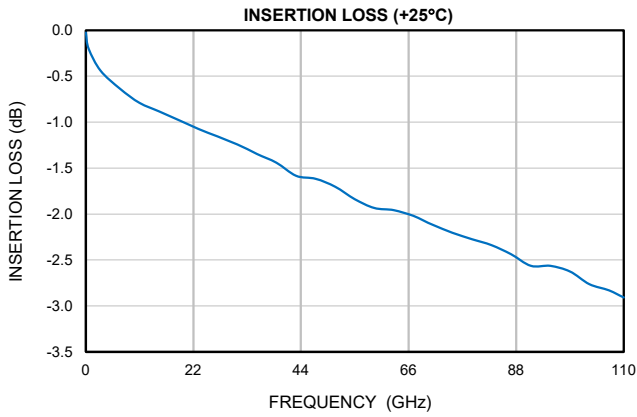



# COAXIAL

# Armored Flexible Cable

# WBL-0.5FT-W1F+


Mini-Circuits

50Ω DC to 110 GHz 6 Inches 1.0 mm-Female to 1.0 mm-Female

### COAXIAL CONNECTIONS


Description	Connector 1	Connector 2
Connector Type	1.0 mm Female	1.0 mm Female
Orientation	Straight	Straight

### CABLE CONSTRUCTION<sup>2</sup>

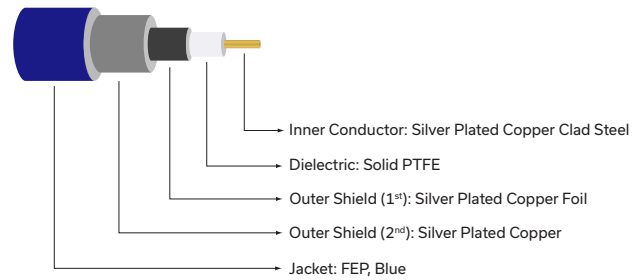

2. Cable construction drawing does not include the armored braiding

### CASE STYLE DRAWING

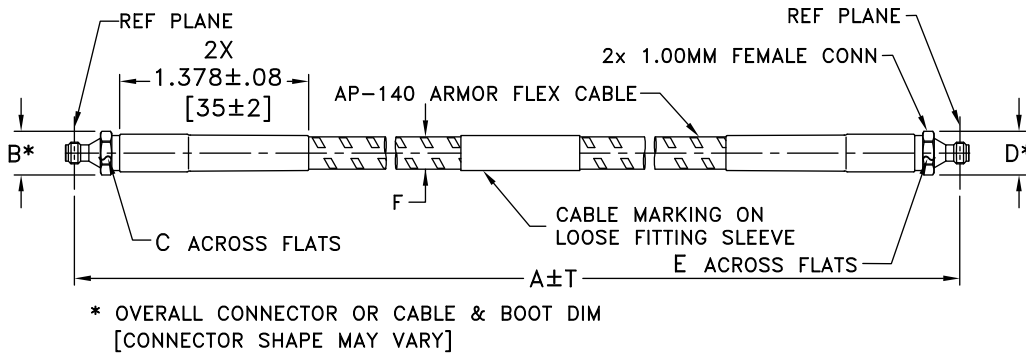

Unless Otherwise Specified dimensions are in inches [mm]  
Tolerances: 2 Pl. ±0.03[0.76]; 3 Pl. ±0.015[0.38] inches[mm]

### OUTLINE DIMENSIONS (Inch/mm)

A	B	C	D	E	F	T	wt
6.00	.32	.276	.32	.276	.221 ± .008	.10	grams
152.40	8.1	7.00	8.1	7.00	5.6 ± 0.2	2.54	20.0

### PRODUCT MARKING\*: WBL-0.5FT-W1F+

\*Marking may contain other features or characters for internal lot control.





COAXIAL

# Armored Flexible Cable

**WBL-0.5FT-W1F+**

50Ω DC to 110 GHz 6 Inches 1.0 mm-Female to 1.0 mm-Female

ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD [CLICK HERE](#)

Performance Data & Graphs	Data Graphs S-Parameter (S2P Files) Data Set (.zip file)
Case Style	AAG3494-6
RoHS Status	Compliant
Environmental Ratings	ENV143

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"; Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at <https://www.minicircuits.com/terms/viewterm.html>



# Armored Flexible Cable 1.0 mm Female to 1.0 mm Female

# WBL-0.5FT-W1F+

## Typical Performance Data

FREQ.	INSERTION LOSS	1.0 mm FEMALE RETURN LOSS	1.0 mm FEMALE RETURN LOSS
(MHz)	(dB)	(dB)	(dB)
0	0.02	46.66	51.01
1	0.20	30.69	30.49
3	0.44	26.26	26.05
7	0.64	38.67	38.50
11	0.79	24.17	24.33
15	0.88	31.78	32.95
19	0.98	35.65	33.71
23	1.07	30.15	29.84
27	1.16	33.94	33.34
31	1.24	34.82	35.49
35	1.35	25.47	25.38
39	1.44	26.84	26.85
43	1.58	18.62	18.82
47	1.62	26.96	26.54
51	1.70	28.59	28.03
55	1.84	20.96	20.20
59	1.93	18.87	18.10
63	1.96	25.26	26.33
67	2.02	30.48	32.28
71	2.12	28.06	27.70
75	2.20	25.54	26.42
79	2.27	29.29	28.39
83	2.34	29.20	30.18
87	2.44	25.29	25.67
91	2.56	24.04	23.25
95	2.56	26.61	27.63
99	2.62	28.00	27.49
103	2.76	23.89	22.74
107	2.83	24.06	23.62
110	2.91	25.00	24.34






P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site  
 The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

IF/RF MICROWAVE COMPONENTS

REV. OR  
 WBL-0.5FT-W1F+  
 11/15/2024  
 Page 1 of 1

## Typical Performance Curves

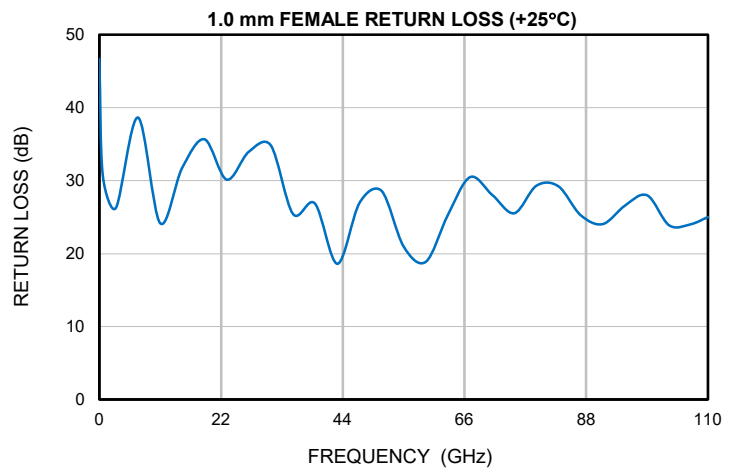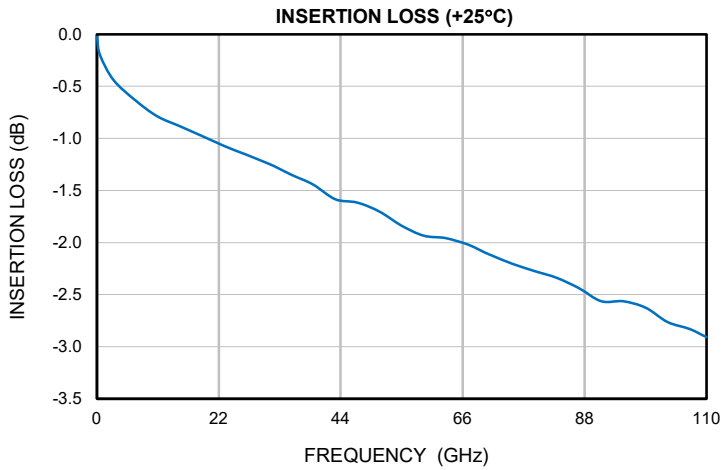

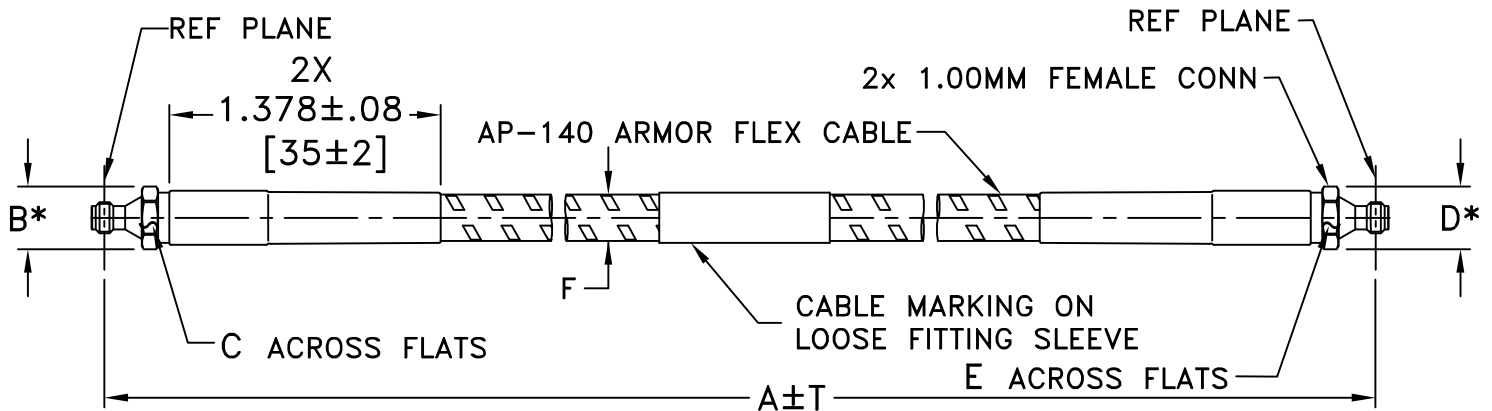

\* OVERALL CONNECTOR OR CABLE & BOOT DIM  
[CONNECTOR SHAPE MAY VARY]

CASE #	A		B	C	D	E	F AF047-A-1F+	T		WEIGHT GRAMS
	INCH	MM						INCH	MM	
AAG3494-6	6.00	152.40	.32 [8.1]	.276 [7.00]	.32 [8.1]	.276 [7.00]	.221±.008 [5.6±0.2]	.10	2.54	20.0
AAG3494-12	12.00	304.80						.15	3.81	27.8

Unless Otherwise Specified dimensions are in inches [mm],  
Tolerances: 2 Pl.±0.03[0.76]; 3 Pl. ±0.015[0.38] inches[mm]

Notes:

1. AP-140 Armor Flexible Cable.
2. "A" Represents Length of Cable.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

<b>Specification</b>	<b>Test/Inspection Condition</b>	<b>Reference/Spec</b>
Operating Temperature	-45° to 80°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-45° to 80°C Ambient Environment	Individual Model Data Sheet
Thermal Shock	-45° to 80°C, 100 cycles	MIL-STD-202; Method 107G
Mechanical Flexing	1000 cycles During each cycle, cable flexed from 90° through 0° to -90° and back	----