



COAXIAL

Armored Flexible Cable

WBL-0.5FT-W1M+

50Ω DC to 110 GHz 6 Inches 1.0 mm-Male to 1.0 mm-Male

KEY FEATURES

- Ultra-wideband DC to 110 GHz
- Low insertion loss, 2.5 dB, typ.
- Excellent return loss, 24.5 dB, typ.
- Strong protective jacket



Generic photo used for illustration purposes only

APPLICATIONS

- Optical communications
- Test & Measurement
- High-speed data systems
- Instrumentation
- Precision Measurement

HANDLING INSTRUCTIONS

1.0 mm connectors require specific handling and torque values. See Mini-Circuits Application Note AN-71-001 for detail.

PRODUCT OVERVIEW

The WBL-0.5FT-W1M+ cable is ideal for interconnecting coaxial components and subassemblies in a wide range of systems, including test and measurement, instrumentation, and more. This braided flexible cable provides a minimum bend radius of 26 mm to accommodate tight layouts without the need for bending tools, adapters or brackets.

ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (GHz)	Min.	Typ.	Max.	Units
Frequency Range		DC	-	110	GHz
Length		6			inches
Insertion Loss	DC – 35	-	0.8	3.7	dB
	35 – 75	-	1.8	3.7	
	75 – 110	-	2.5	3.7	
Return Loss	DC – 35	14.0	32.9	-	dB
	35 – 75	14.0	27.9	-	
	75 – 110	14.0	24.5	-	

ABSOLUTE MAXIMUM RATINGS¹

Operating Case Temperature	-45°C to +80°C
Storage Temperature	-45°C to +80°C
Average Power Handling at Sea Level	14.4 W at 6 GHz
	7.9 W at 18 GHz
	5.0 W at 40 GHz
	3.6 W at 67 GHz
	2.7 W at 110 GHz

1. Permanent damage may occur if any of these limits are exceeded.



REV. OR
ECO-023939
WBL-0.5FT-W1M+
MCL NY
241212





COAXIAL

Armored Flexible Cable

WBL-0.5FT-W1M+

50 Ω DC to 110 GHz 6 Inches 1.0 mm-Male to 1.0 mm-Male

TYPICAL PERFORMANCE GRAPHS

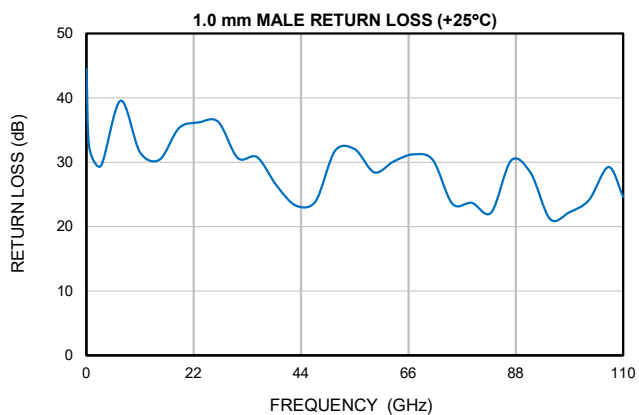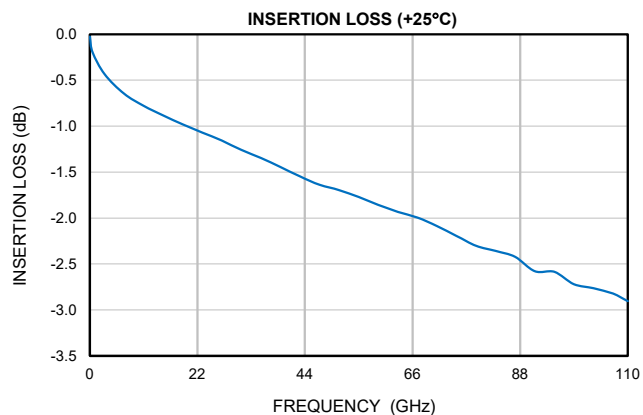



COAXIAL

Armored Flexible Cable

WBL-0.5FT-W1M+


Mini-Circuits

50Ω DC to 110 GHz 6 Inches 1.0 mm-Male to 1.0 mm-Male

COAXIAL CONNECTIONS


Description	Connector 1	Connector 2
Connector Type	1.0 mm Male	1.0 mm Male
Orientation	Straight	Straight

CABLE CONSTRUCTION²

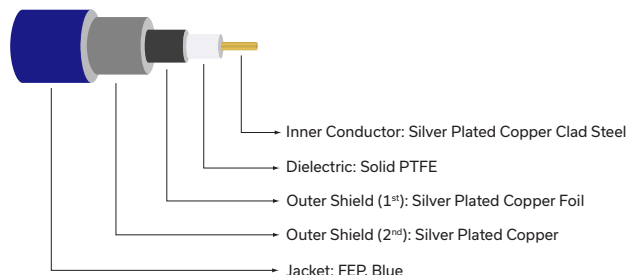

2. Cable construction drawing does not include the armored braiding

CASE STYLE DRAWING

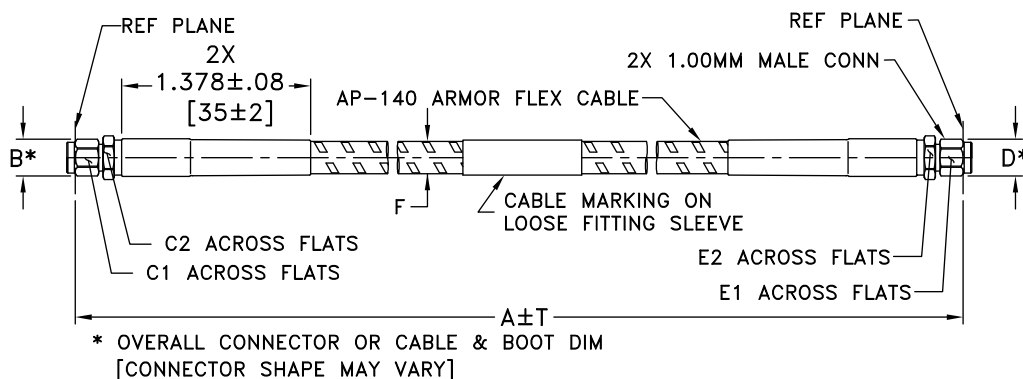

Unless Otherwise Specified dimensions are in inches [mm],
Tolerances: 2 Pl. ±0.03[0.76]; 3 Pl. ±0.015[0.38] inches [mm]

OUTLINE DIMENSIONS (Inch mm)

A	B	C1	C2	D	E1	E2	F	T	wt
6.00	.32	.236	.276	.32	.236	.276	.221±.008	.10	grams
152.40	8.1	6.0	7.0	8.1	6.00	7.00	5.6±0.2	2.54	21.2

PRODUCT MARKING*: WBL-0.5FT-W1M+

*Marking may contain other features or characters for internal lot control.





Mini-Circuits

COAXIAL

Armored Flexible Cable

WBL-0.5FT-W1M+

50Ω DC to 110 GHz 6 Inches 1.0 mm-Male to 1.0 mm-Male

ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD

[CLICK HERE](#)

Performance Data & Graphs	Data
	Graphs
	S-Parameter (S2P Files) Data Set (.zip file)
Case Style	AAG3495-6
RoHS Status	Compliant
Environmental Ratings	ENV143

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"; Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at <https://www.minicircuits.com/terms/viewterm.html>



Armored Flexible Cable 1.0 mm Male to 1.0 mm Male

WBL-0.5FT-W1M+

Typical Performance Data

FREQ.	INSERTION LOSS	1.0 mm MALE RETURN LOSS	1.0 mm MALE RETURN LOSS
(GHz)	(dB)	(dB)	(dB)
0	0.02	44.55	45.87
1	0.20	32.31	32.50
3	0.43	29.48	28.97
7	0.65	39.57	38.67
11	0.78	31.51	32.40
15	0.88	30.39	30.30
19	0.98	35.32	34.74
23	1.07	36.16	34.65
27	1.16	36.28	33.06
31	1.26	30.67	33.45
35	1.35	30.76	30.40
39	1.45	26.33	27.70
43	1.55	23.24	25.11
47	1.64	23.96	24.93
51	1.70	31.80	31.30
55	1.77	31.99	30.69
59	1.86	28.42	27.95
63	1.93	30.14	30.67
67	1.99	31.21	31.87
71	2.09	30.35	31.32
75	2.19	23.56	25.14
79	2.30	23.68	27.71
83	2.36	22.17	21.33
87	2.42	30.26	25.85
91	2.58	28.39	25.06
95	2.59	21.18	24.63
99	2.72	22.22	20.94
103	2.76	24.12	21.24
107	2.82	29.23	26.39
110	2.91	24.64	26.03





P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS


REV. OR
WBL-0.5FT-W1M+
11/22/2024
Page 1 of 1

Typical Performance Curves

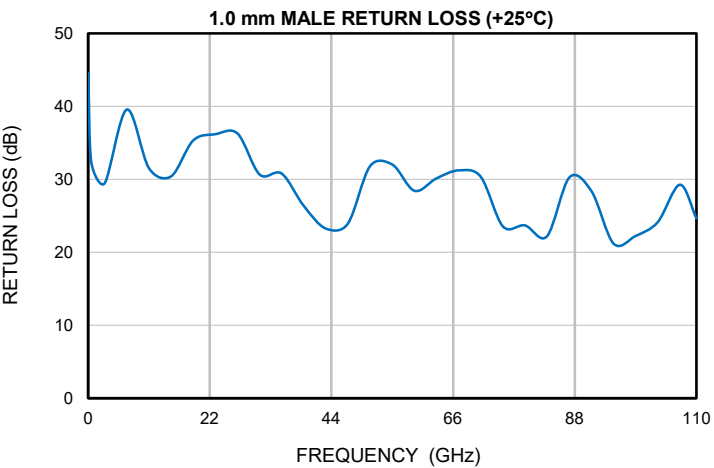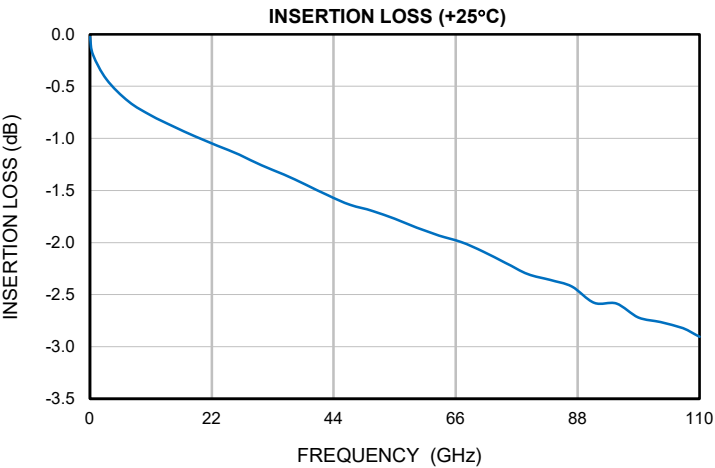

Outline Dimensions

AAG3495

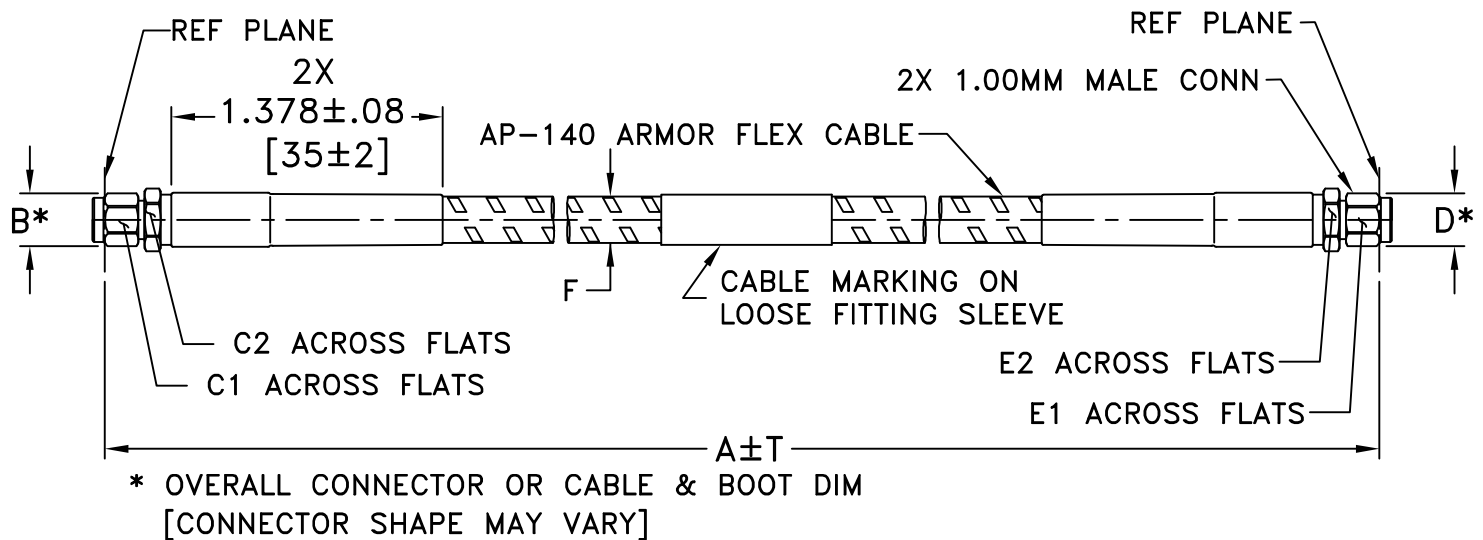[illegible]

Unless Otherwise Specified dimensions are in inches [mm],
Tolerances: 2 Pl.±0.03[0.76]; 3 Pl. ±0.015[0.38] inches[mm]

Notes:

1. AP-140 Armor Flexible Cable.
2. "A" Represents Length of Cable.



ISO 9001 ISO 14001 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS





All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-45° to 80°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-45° to 80°C Ambient Environment	Individual Model Data Sheet
Thermal Shock	-45° to 80°C, 100 cycles	MIL-STD-202; Method 107G
Mechanical Flexing	1000 cycles During each cycle, cable flexed from 90° through 0° to -90° and back	----