

## WAVEGUIDE TO COAX

# Adapter

## WR28-KFR+

50Ω 26.5 to 40 GHz (Right-Angle 2.92mm-F to WR28 UG-599/U Sq. Cover Flange)

### THE BIG DEAL

- Ka-Band frequency range, 26.5 to 40 GHz
- Excellent VSWR, 1.2:1 typ.
- Low insertion loss, 0.15dB typ.
- Compact design
- UG-599/U waveguide cover flange
- 2.92mm-F connector



Generic photo used for illustration purposes only

Model No.	WR28-KFR+
Case Style	UW3144
Connector 1	2.92 mm-F
Connector 2	WR28 UG-599/U SQ. Cover Flange

#### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### APPLICATIONS


- Instrumentation and Lab use
- Rapid Prototyping
- Waveguide Systems
- Radars
- Communications
- Industrial, Scientific and Medical
- 5G Cellular Mobile

### PRODUCT OVERVIEW

Mini-Circuits' WR28-KFR+ is a waveguide to coax adapter operating from 26.5 to 40 GHz. This product features a WR28 waveguide with a precision standard UG-599/U-Flange transitioning to 2.92 mm-F coaxial connector. The WR28-KFR+ is machined from aluminum alloy 6061-T6 and gold-plated to ensure repeatable RF performance. This adapter has numerous applications in laboratories, Ka-Band communications, Radars and more.

### KEY FEATURES

Feature	Advantages
Wideband, 26.5 to 40 GHz	Full operating frequency range of WR-28 waveguide
Low insertion loss/excellent VSWR	Key for critical waveguide to coax requirements



### ELECTRICAL SPECIFICATIONS AT 25°C


Parameter	Condition (GHz)	Min.	Typ.	Max.	Units
Frequency Range		26.5		40	GHz
Insertion Loss	26.5 - 40		0.15	0.40	dB
	26.5 - 29		0.15		
	33 - 36		0.2		
	37 - 40		0.15		
VSWR	26.5 - 40		1.2	1.38	:1
	26.5 - 29		1.15		
	33 - 36		1.25		
	37 - 40		1.2		

### MAXIMUM RATINGS

Parameter	Ratings
Operating Case Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +100 °C


Permanent damage may occur if any of these limits are exceeded.

### OUTLINE DRAWING

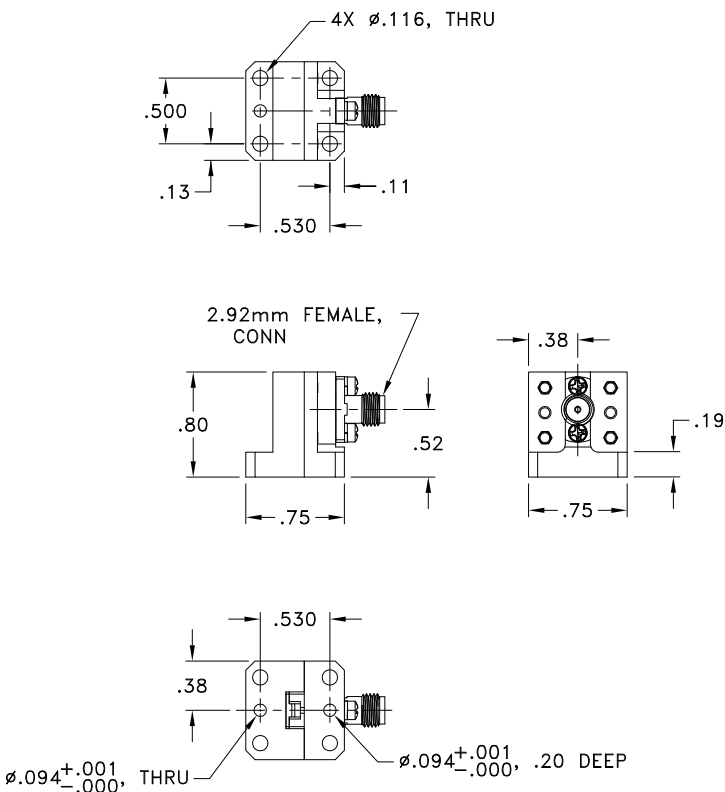



Weight: 54 grams.

Dimensions are in inches (mm). Tolerances: 2 Pl.  $\pm$ .03; 3 Pl.  $\pm$ .015



### TYPICAL PERFORMANCE DATA

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
26.50	0.19	1.23
27.0	0.17	1.14
28.0	0.15	1.03
29.0	0.13	1.11
30.0	0.21	1.16
31.0	0.30	1.18
32.0	0.15	1.20
33.0	0.12	1.21
34.0	0.16	1.24
35.0	0.21	1.25
36.0	0.25	1.25
37.0	0.20	1.20
38.0	0.13	1.15
39.0	0.10	1.13
40.0	0.10	1.24

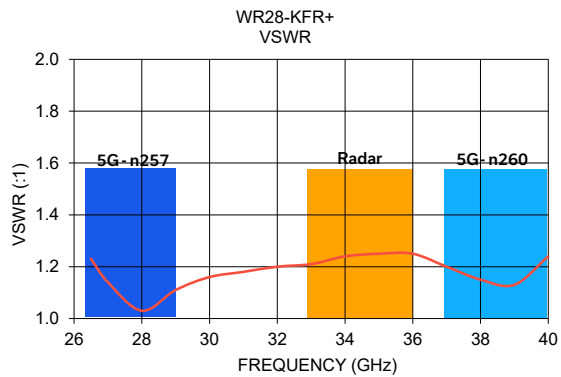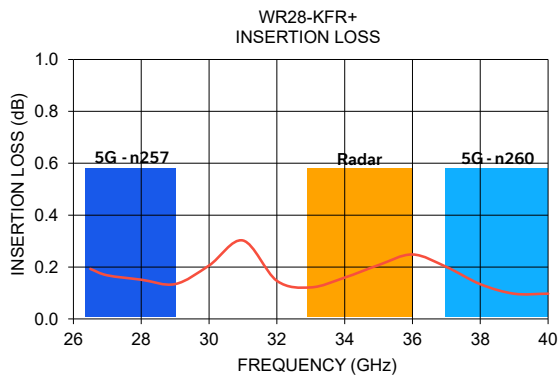



- NOTES**
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
  - B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
  - C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)





# Adapter, Coaxial to Waveguide WR28-KFR+

## Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	VSWR (:1)
26500	0.19	1.23
26750	0.18	1.19
27000	0.17	1.14
27250	0.16	1.12
27500	0.16	1.09
27750	0.16	1.06
28000	0.15	1.03
28250	0.15	1.04
28500	0.14	1.06
28750	0.14	1.08
29000	0.13	1.11
29250	0.14	1.12
29500	0.15	1.14
29750	0.17	1.15
30000	0.21	1.16
30250	0.25	1.17
30500	0.29	1.17
30750	0.31	1.17
31000	0.30	1.18
31250	0.27	1.18
31500	0.23	1.19
31750	0.19	1.20
32000	0.15	1.20
32250	0.12	1.20
32500	0.11	1.20
32750	0.11	1.21
33000	0.12	1.21
33250	0.13	1.22
33500	0.15	1.22
33750	0.15	1.23
34000	0.16	1.24
34250	0.17	1.24
34500	0.18	1.25
34750	0.19	1.25
35000	0.21	1.25
35250	0.23	1.25
35500	0.24	1.25
35750	0.25	1.25
36000	0.25	1.25
36250	0.24	1.24
36500	0.22	1.23
36750	0.21	1.22
37000	0.20	1.21
37250	0.18	1.20
37500	0.16	1.19
37750	0.15	1.18
38000	0.13	1.15
38250	0.12	1.14
38500	0.11	1.13
38750	0.10	1.12
39000	0.10	1.13
39250	0.09	1.14
39500	0.09	1.16
39750	0.09	1.21
40000	0.10	1.24

## Typical Performance Curves

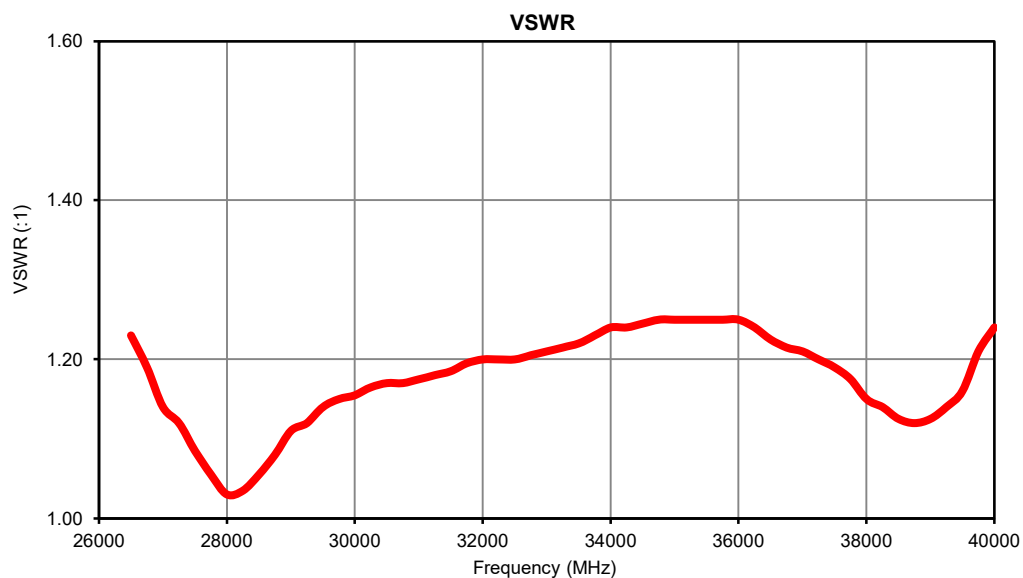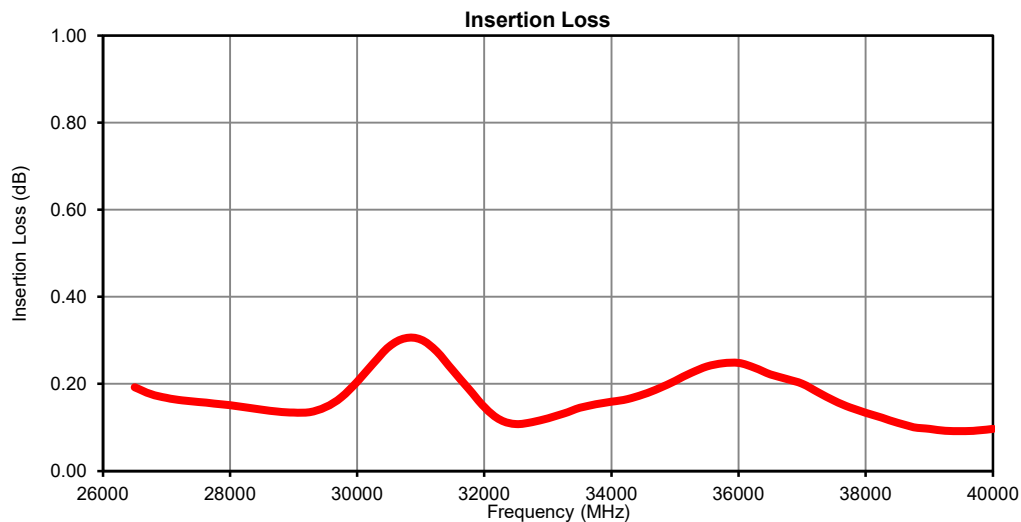

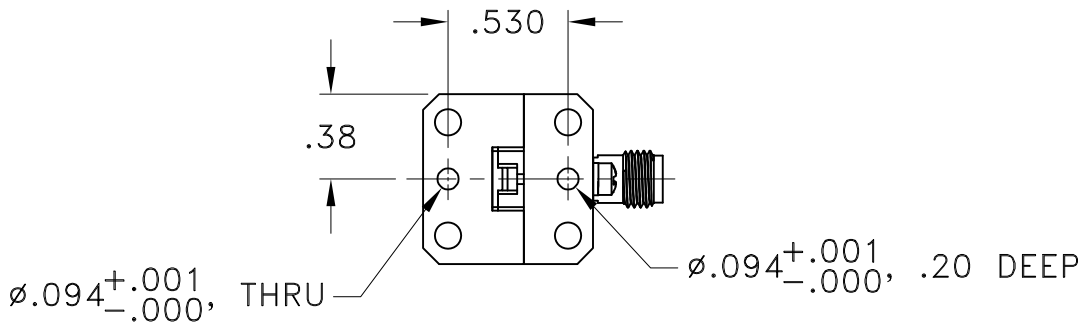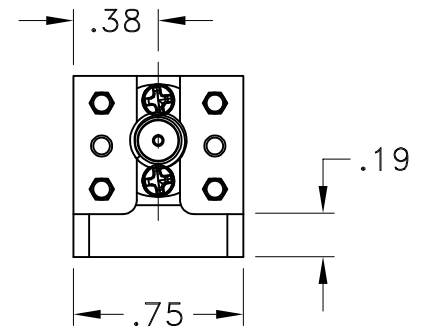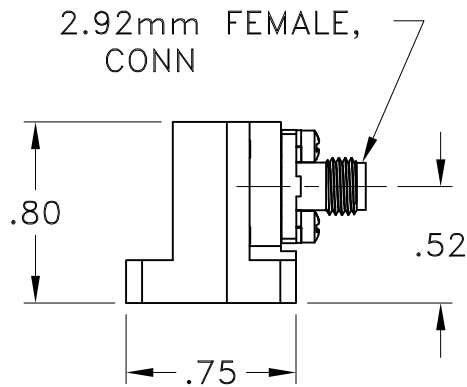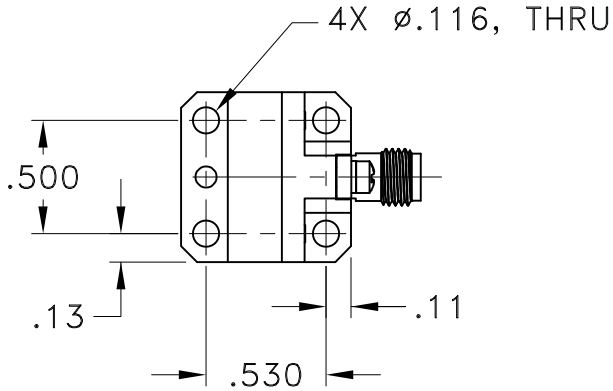

Weight: 54 grams.

Dimensions are in inches (mm). Tolerances: 2 Pl.  $\pm$ .03; 3 Pl.  $\pm$ .015

### Notes:

1. Case material: Aluminum.
2. Case finish: Gold Plating.

**Mini-Circuits®**  
ISO 9001 ISO 14001 CERTIFIED

ALL NEW  
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

<b>Specification</b>	<b>Test/Inspection Condition</b>	<b>Reference/Spec</b>
Operating Temperature	-40° to 85° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 5 cycles	MIL-STD-202, Method 107, Condition B except over -55° to 100°C