



(SIW) SURFACE MOUNT

# Bandpass Filter

## WSBP-26G+

50Ω 25 to 27 GHz

### KEY FEATURES

- Low Midband Insertion loss 1.7dB typ.
- High Rejection 56 dB typ.
- Shielded Construction.

### APPLICATIONS

- n258
- 5G Telecommunication.




Generic photo used for illustration purposes only

### PRODUCT OVERVIEW

Mini-Circuits' Model-WSBP-26G+ is a SIW (Substrate Integrated Waveguide) filter that offer a good insertion loss and high rejection, realized in a soft substrate using tight tolerance that can guarantee a enhanced Q and repeatable performance. Band pass surface mount SIW design can be realized with this technology. Using SIW, we can guarantee repeatability on large batches of filters.

### FUNCTIONAL DIAGRAM



### ELECTRICAL SPECIFICATIONS<sup>1,2,3</sup> AT +25°C

Parameter	F#	Frequency (GHz)	Min.	Typ.	Max.	Units
Passband	Center Frequency <sup>4</sup>	Fc	—	1.7	2.2	GHz
	Insertion Loss	F1-F2	—	2.3	3	dB
	Return Loss	F1-F2	25 - 27	—	12	dB
Stop Band, Lower	Rejection	DC-F3	DC - 9	45	56	—
		F3-F4	9 - 21	30	41	dB
Stop Band, Upper	Rejection	F4-F5	21 - 23	20	42	—
		F6-F7	31 - 32	25	35	dB

1. Tested in Evaluation Board P/N TB-WSBP-26G+.

2. This filter is bi-directional RF1 and RF2 ports may be interchanged, see S-Parameters for actual performance.

3. This component should not be used as a DC-block. In applications where DC voltage and/or current is present at either the input or output ports, external DC blocking capacitors are required.


4. Typical variation ± 2%

### ABSOLUTE MAXIMUM RATINGS<sup>5</sup>

Parameter	Ratings
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +100 °C
Input Power	1W Max. @25 °C

5. Permanent damage may occur if any of these limits are exceeded.

### TYPICAL FREQUENCY RESPONSE AT +25°C

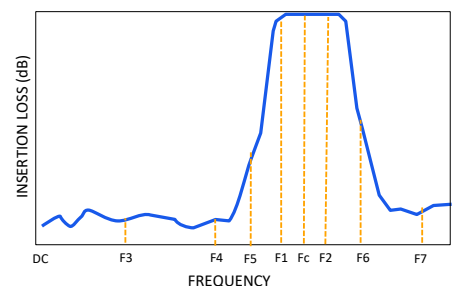

REV. OR  
ECO-020324  
WSBP-26G+  
EDU4190  
URJ  
231219





(SIW) SURFACE MOUNT





# Bandpass Filter

## WSBP-26G+

Mini-Circuits


50Ω 25 to 27 GHz

### TYPICAL PERFORMANCE GRAPHS AT +25°C

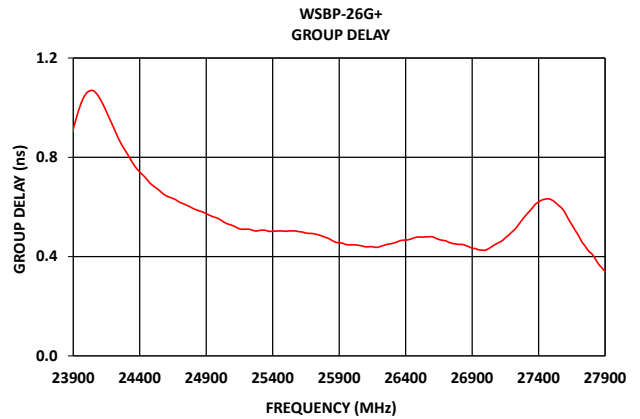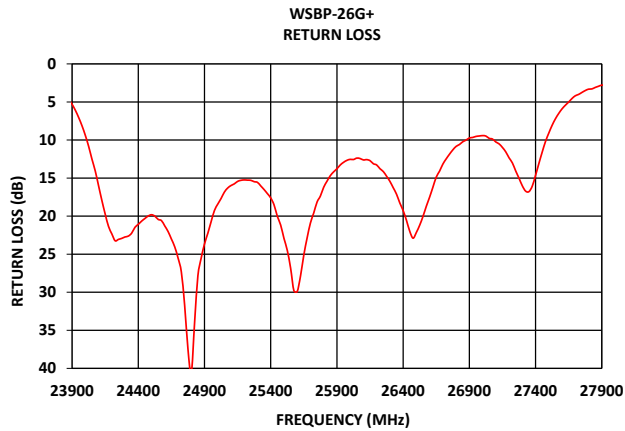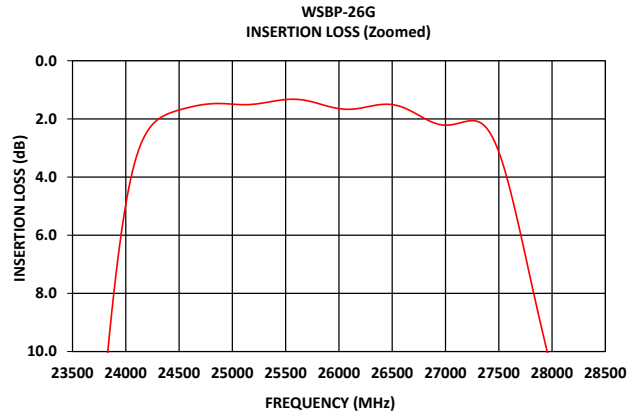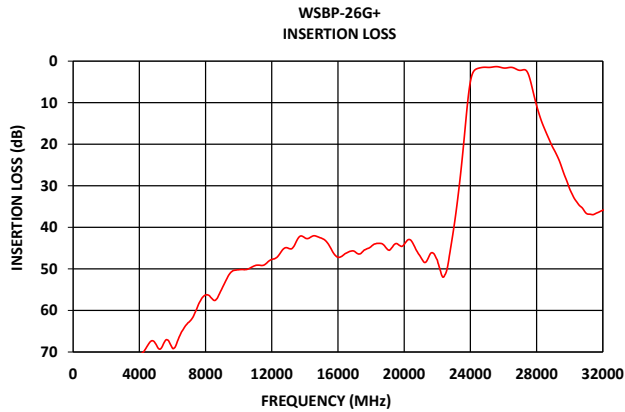




### FUNCTIONAL DIAGRAM




### PAD DESCRIPTION

Function	Pad Number	Description
RF1 <sup>2</sup>	1	Connects to RF Input Port
RF2 <sup>2</sup>	2	Connects to RF Output Port
GROUND	3	Connects to Ground on PCB, (See drawing PL-693)

### CASE STYLE DRAWING

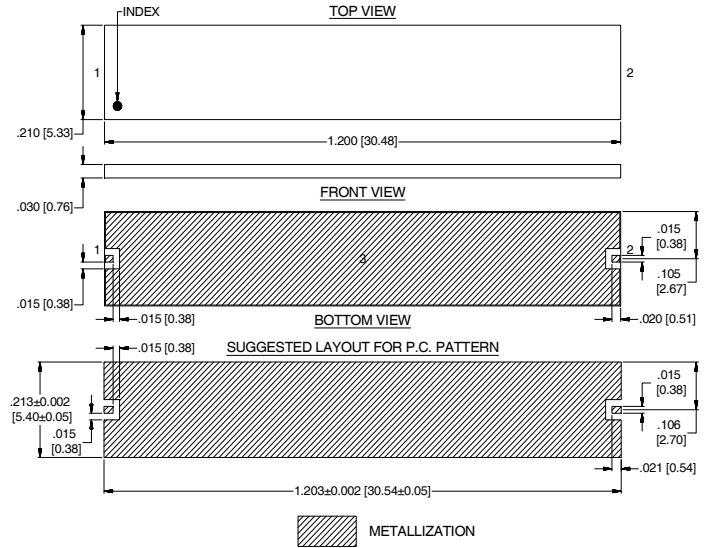

### SUGGESTED PCB LAYOUT (PL-693)

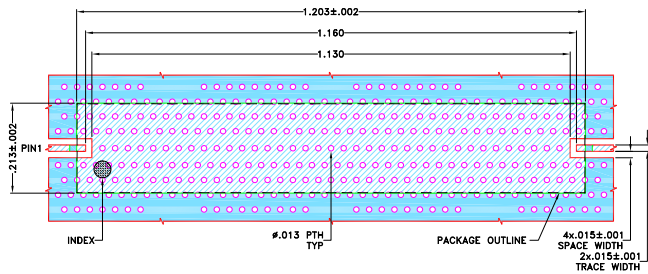

#### NOTES:

1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS (RO4350B) WITH DIELECTRIC THICKNESS .0066±.0007; COPPER: 1/2 Oz. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
  2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER PATTERN WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
 DENOTES PCB COPPER PATTERN FREE OF SOLDERMASK

Figure 2. Suggested PCB Layout PL-693



(SIW) SURFACE MOUNT

# Bandpass Filter

## WSBP-26G+

Mini-Circuits

50Ω 25 to 27 GHz

ADDITIONAL DETAILED INFORMATION IS AVAILABLE ON OUR DASH BOARD.

[CLICK HERE](#)

Performance Data and Graphs	Data
	Graphs S-Parameter (S2P Files) Data Set (.zip file) De-embedded to device pads
Case Style	YR3342 Lead Finish: Gold over Nickel Plate
RoHs Status	Compliant
Tape and Reel	TR-F007
Suggested Layout for PCB Design	PL-693
Evaluation Board	TB-WSBP-26G+
	Gerber File
Environmental Rating	ENV54

### NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)



# SIW Bandpass Filter





# WSBP-26G+

## Typical Performance Data

FREQ.	Insertion Loss	Input Return Loss	Output Return Loss
(MHz)	(dB)	(dB)	(dB)
10	105.24	0.08	0.11
20	105.34	0.08	0.11
40	105.65	0.09	0.13
100	106.12	0.11	0.15
150	106.51	0.13	0.16
200	106.85	0.15	0.18
300	107.32	0.18	0.21
400	107.15	0.22	0.25
500	105.90	0.26	0.28
600	103.73	0.29	0.31
700	100.84	0.31	0.33
800	98.15	0.33	0.35
900	95.90	0.35	0.37
1000	94.33	0.36	0.39
1500	88.28	0.39	0.42
2000	84.34	0.39	0.42
2500	80.52	0.37	0.40
3000	78.38	0.33	0.36
3500	74.86	0.32	0.35
4000	70.67	0.33	0.36
5000	68.10	0.41	0.46
6000	69.07	0.52	0.57
6500	65.59	0.57	0.62
7400	60.22	0.58	0.66
7500	59.28	0.58	0.67
8000	56.29	0.63	0.73
8500	57.56	0.68	0.79
9000	54.67	0.73	0.84
10000	50.22	0.83	0.93
11000	49.21	0.91	1.02
12000	47.72	1.02	1.13
13000	45.02	1.14	1.24
14000	42.52	1.20	1.32
15000	42.59	1.25	1.39
16000	47.20	1.26	1.36
17000	45.78	1.34	1.43
18000	44.63	1.41	1.54
19000	45.35	1.49	1.71
20000	44.12	1.60	1.83
20500	43.65	1.72	1.93
21000	47.18	1.88	2.12
21500	46.99	2.09	2.28
22000	47.87	2.18	2.32
22500	51.14	2.12	2.17
23000	40.07	1.77	1.97
23500	23.66	1.91	2.09
24000	4.94	9.39	8.90
24500	1.69	19.82	20.92
25000	1.49	18.43	17.42
25500	1.33	22.92	25.88
26000	1.65	12.54	13.94
26500	1.51	22.14	27.07
27000	2.21	9.42	11.32
27500	3.13	9.09	10.26
28000	10.67	2.63	3.88
28500	16.48	2.73	3.89
29000	20.93	3.08	3.55
30000	30.75	2.35	2.43
31000	36.63	1.72	2.25
32000	35.88	1.61	2.48


FREQ.	Group Delay
(MHz)	(ns)
25000	0.55
25050	0.53
25100	0.52
25150	0.51
25200	0.51
25250	0.51
25300	0.51
25350	0.51
25400	0.50
25450	0.50
25500	0.50
25550	0.50
25600	0.50
25650	0.49
25700	0.49
25750	0.49
25750	0.49
25800	0.48
25850	0.46
25900	0.46
25950	0.45
26000	0.45
26050	0.45
26100	0.44
26150	0.44
26200	0.44
26250	0.45
26300	0.45
26350	0.46
26400	0.47
26450	0.47
26500	0.48
26550	0.48
26600	0.48
26650	0.47
26700	0.46
26750	0.45
26800	0.45
26850	0.45
26900	0.43
26950	0.43
27000	0.43

Typical Performance Curves

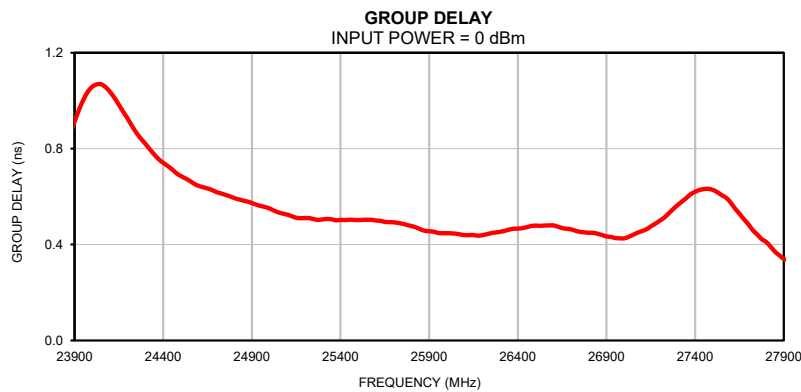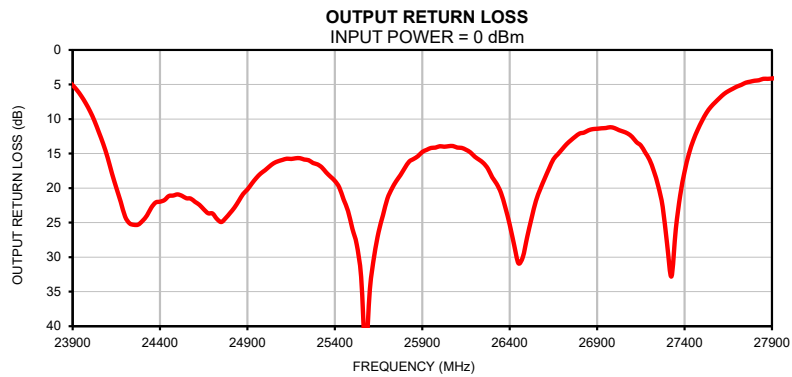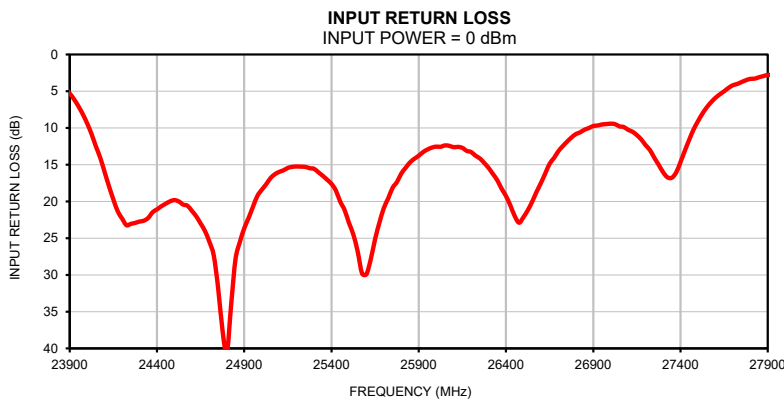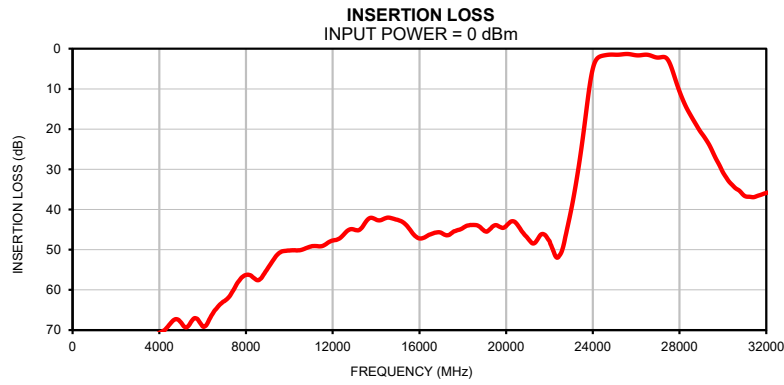

## Outline Dimensions

## YR3342

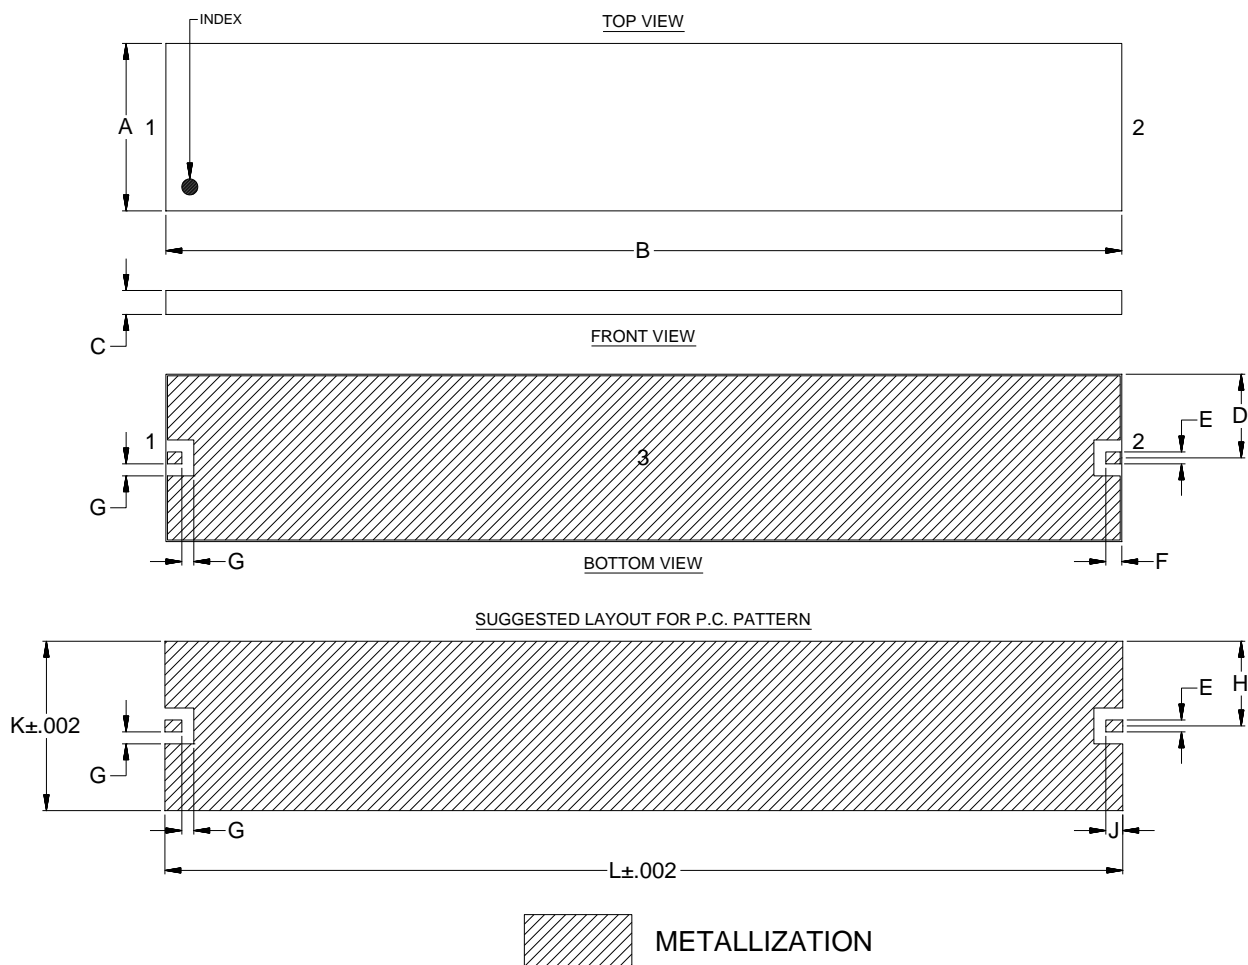

CASE#	A	B	C	D	E	F	G	H	J	K	L	WT.GRAM
YR3342	.210 (5.33)	1.200 (30.48)	.030 (0.76)	.105 (2.67)	.015 (0.38)	.020 (0.51)	.015 (0.38)	.106 (2.70)	.021 (0.54)	.213 (5.40)	1.203 (30.54)	0.35

Dimensions are in inches (mm). Tolerances: 2Pl. ± .01; 3Pl. ± .005

### Notes:

1. Base: Printed wiring laminate.
2. Termination finish:  
For RoHS Case Styles: 3-5µ inch gold over 120-240µ inch nickel plate.

**Mini-Circuits®**  
ISO 9001 ISO 14001 CERTIFIED

ALL NEW  
minicircuits.com


P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	NPO-003185	NEW RELEASE	FEB 23	DDR	VC

SUGGESTED MOUNTING CONFIGURATION  
FOR YR3342 CASE STYLE

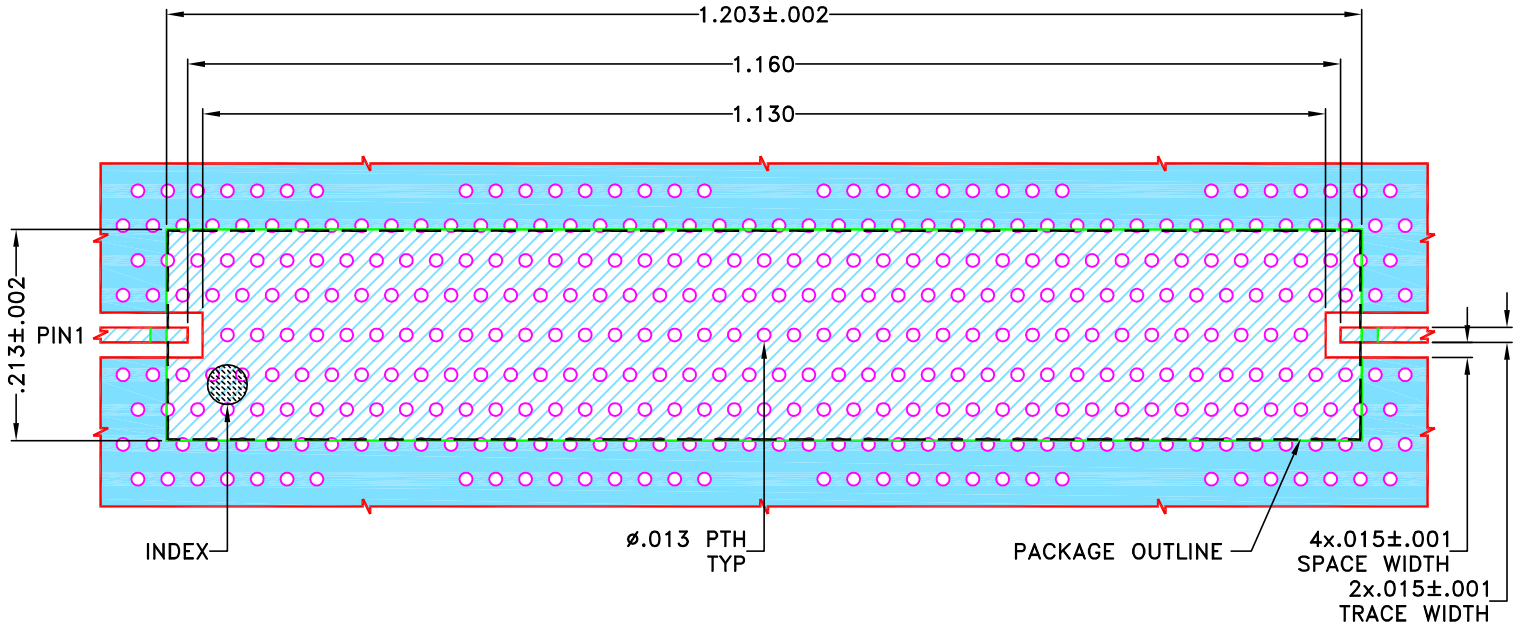

NOTES:

- COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS (R04350B) WITH DIELECTRIC THICKNESS  $.0066 \pm .0007$ ; COPPER: 1/2 Oz. EACH SIDE.  
FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER PATTERN WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
 DENOTES PCB COPPER PATTERN FREE OF SOLDERMASK

UNLESS OTHERWISE SPECIFIED	INITIALS	DATE
DIMENSIONS ARE IN INCHES	DRAWN DDR	15 FEB 23
TOLERANCES ON:	CHECKED MD	15 FEB 23
2 PL DECIMALS ±	APPROVED PTB	15 FEB 23
3 PL DECIMALS ± .005		
ANGLES ±		
FRACTIONS ±		

**Mini-Circuits®** 13 Neptune Avenue  
Brooklyn NY 11235

PL DWG YR3342 C.S 50 OHM WSBP

Mini-Circuits®


THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-693	OR
FILE:	98-PL-693	SCALE:	5:1
SHEET:	1	OF	1




# Evaluation Board and Circuit

TB-WSBP-26G+

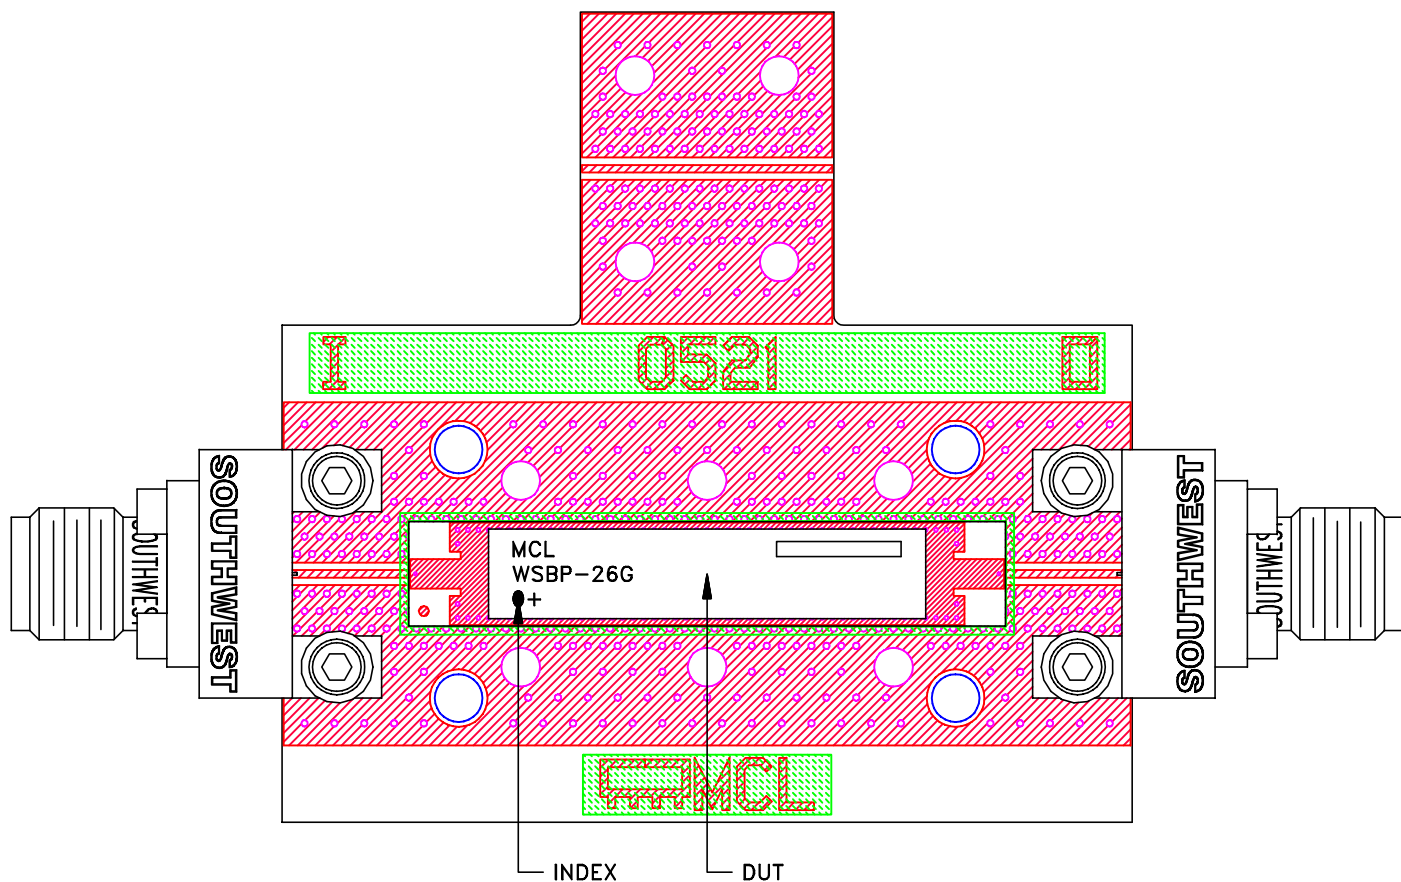


Schematic diagram

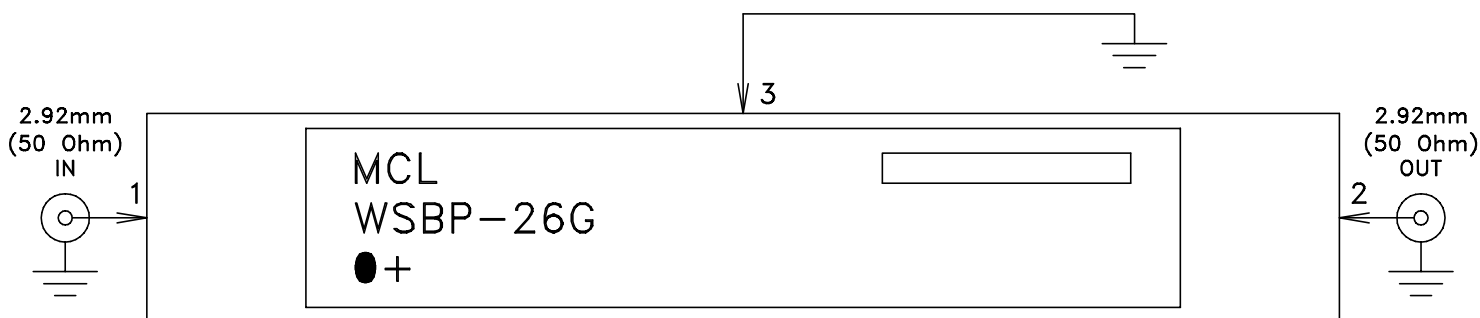

**Notes:**

1. PCB Material: ROGERS (R04350B) OR Equivalent, Dielectric Constant= $3.48 \pm 0.05$   
Dielectric Thickness:  $.0066 \pm 0.0007$
2. 50 Ohm 2.92mm Female Connectors.

 **Mini-Circuits®**

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 96 hours, 40°C	MIL-STD-202, Method 103B, Condition B, Except 50°C
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutectic Process: 225°C peak Pb-Free Process, 245°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 4 times in each of three axes (total 12)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A