

Matching Transformer

Z7550-NFNF+

50/75Ω

DC to 2500 MHz

The Big Deal

- Low Insertion loss 0.6 dB typ.
- 2W Power Handling
- Maximum DC current handling capability of 5A
- Connectorized package
- N-Female (50Ω) to N-Female (75Ω) connectors



Generic photo used for illustration purposes only
CASE STYLE: H795-10

Product Overview

Mini-Circuits' Z7550-NFNF+ is a coaxial 50/75Ω matching transformer covering the DC to 2500 MHz frequency range, supporting impedance matching in a wide range of systems including CATV, broadband networks, matching antenna systems and more. This model is ideal for 50/75Ω impedance matching in systems where minimizing overall signal loss is a priority. The transformer handles RF input power up to 0.5W and comes housed in a rugged, compact aluminum alloy case (1.25" x 1.25" x 0.94") with N-F (50Ω) to N-F (75Ω) connectors.

Key Features

Feature	Advantages
Wideband, DC to 2500 MHz	Supports a wide variety of applications including CATV and DOCSIS® 3.1 systems and equipment.
Low insertion loss, 0.6 dB	Enables excellent signal power transmission from input to output, minimizing overall system losses.
2W Power handling	Supports a range of system power requirements.
Compact size, 1.25" x 1.25" x 0.94"	Accommodates tight space requirements for crowded system layouts.
Connectorized package N-Female (50Ω) to N-Female (75Ω) connectors	Supports connections between components with different connector types.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



DC Pass

Matching Transformer

50/75Ω

DC to 2500 MHz

Z7550-NFNF+

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
DC Current	5A max.
DC Resistance	0.2Ω max.

Permanent damage may occur if any of these limits are exceeded.


Coaxial Connections

PORT - 1	N-Female(50Ω)
PORT - 2	N-Female(75Ω)

Outline Drawing

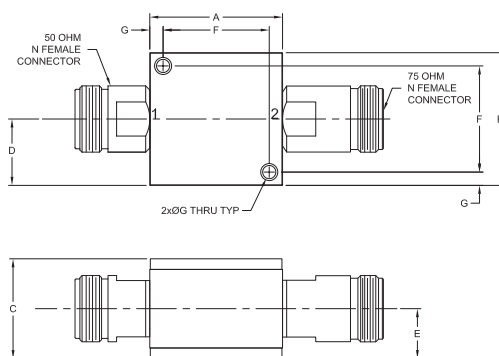

Label Marking

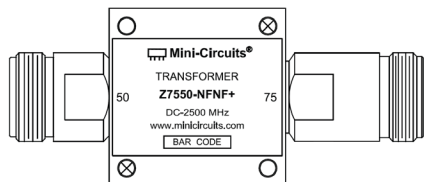


Caution: Check for connector type before mating

Outline Dimensions (inch mm)

A	B	C	D	E	F	G	Wt.
1.25	1.25	.94	.63	.47	1.000	.125	grams
31.75	31.75	23.88	15.88	11.94	25.40	3.18	83.5

Note: Please refer to case style drawing for details

Functional Schematic



Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- Low loss (0.6 dB typ.) matching device
- Wideband coverage, DC-2500MHz
- Connectorized package
- Max DC current handling capability of 5A

Applications

- Impedance matching
- CATV
- Matching antenna systems



Generic photo used for illustration purposes only

CASE STYLE: H795-10

Connectors	Model
75Ω N-F	Z7550-NFNF+
50Ω N-F	

+RoHS Compliant



The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range	-	DC	-	2500	MHz
Insertion Loss	10 400 - 2500	- -	- 0.6	0.5 1.2	dB
VSWR	10 400 - 2500	- -	- -	1.8 1.6	:1
Power	DC - 2500	-	-	2	W

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	VSWR 50 Ω	VSWR 75 Ω
10	0.01	1.50	1.50
100	0.07	1.50	1.48
400	0.32	1.42	1.40
800	0.24	1.23	1.24
950	0.19	1.16	1.18
1500	0.28	1.15	1.14
1750	0.32	1.19	1.17
2150	0.46	1.27	1.33
2300	0.52	1.28	1.32
2500	0.53	1.28	1.30

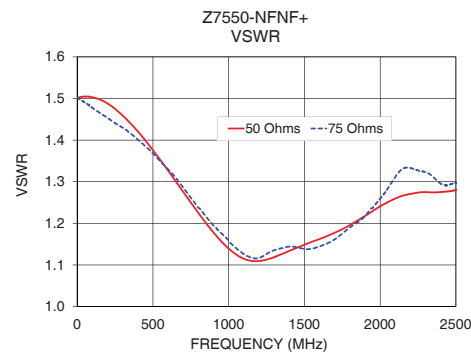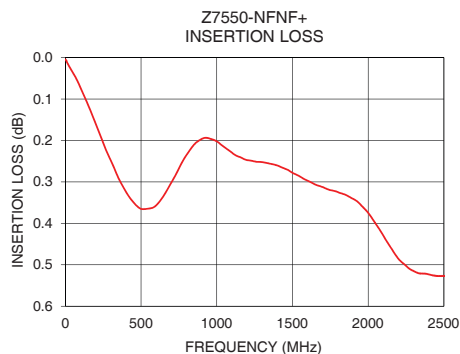

Mini-Circuits®


www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. OR
ECO-009239
Z7550-NFNF+
EDU2521_1
URJ
210816
Page 2 of 2

Typical Performance Data

FREQ.	INSERTION LOSS	INPUT RETURN LOSS (50Ω)	OUTPUT RETURN LOSS (75Ω)
(MHz)	(dB)	(dB)	(dB)
1	0.00	13.97	13.95
10	0.01	13.92	13.98
15	0.01	13.91	14.00
20	0.02	13.90	14.01
30	0.02	13.89	14.05
40	0.03	13.88	14.08
50	0.04	13.89	14.11
60	0.04	13.89	14.15
70	0.05	13.90	14.17
80	0.06	13.91	14.20
90	0.06	13.92	14.25
100	0.07	13.93	14.27
120	0.09	14.04	14.35
140	0.11	14.20	14.43
160	0.12	14.41	14.50
180	0.14	14.66	14.57
200	0.16	14.97	14.65
250	0.21	15.32	14.85
300	0.25	15.70	15.03
350	0.29	16.12	15.23
400	0.32	17.12	15.48
450	0.35	16.57	15.77
500	0.37	17.03	16.09
550	0.36	17.51	16.49
600	0.36	17.98	16.90
650	0.33	18.45	17.34
700	0.30	18.91	17.93
750	0.27	19.34	18.59
800	0.24	19.74	19.32
850	0.21	20.09	20.14
900	0.20	20.41	20.97
950	0.19	21.41	21.75
1000	0.20	20.66	22.58
1050	0.22	20.85	23.49
1100	0.23	20.98	24.36
1150	0.24	21.04	25.05
1200	0.25	22.04	25.24
1250	0.25	21.03	24.67
1300	0.25	20.97	24.05
1350	0.26	20.85	23.70
1400	0.26	20.66	23.46
1450	0.27	20.41	23.48
1500	0.28	20.10	23.73
1550	0.29	19.74	23.76
1600	0.30	19.35	23.50
1650	0.31	18.94	23.12
1700	0.31	18.52	22.64
1750	0.32	18.14	22.01
1800	0.32	17.79	21.34
1850	0.33	17.48	20.83
1900	0.34	17.24	20.30
1950	0.35	18.24	19.53
2000	0.37	17.09	18.83
2050	0.40	17.02	18.17
2100	0.43	17.04	17.46
2150	0.46	17.18	16.96
2200	0.49	17.41	16.90
2300	0.52	17.74	17.13
2400	0.52	18.13	17.78
2500	0.53	18.51	17.76

Typical Performance Curves

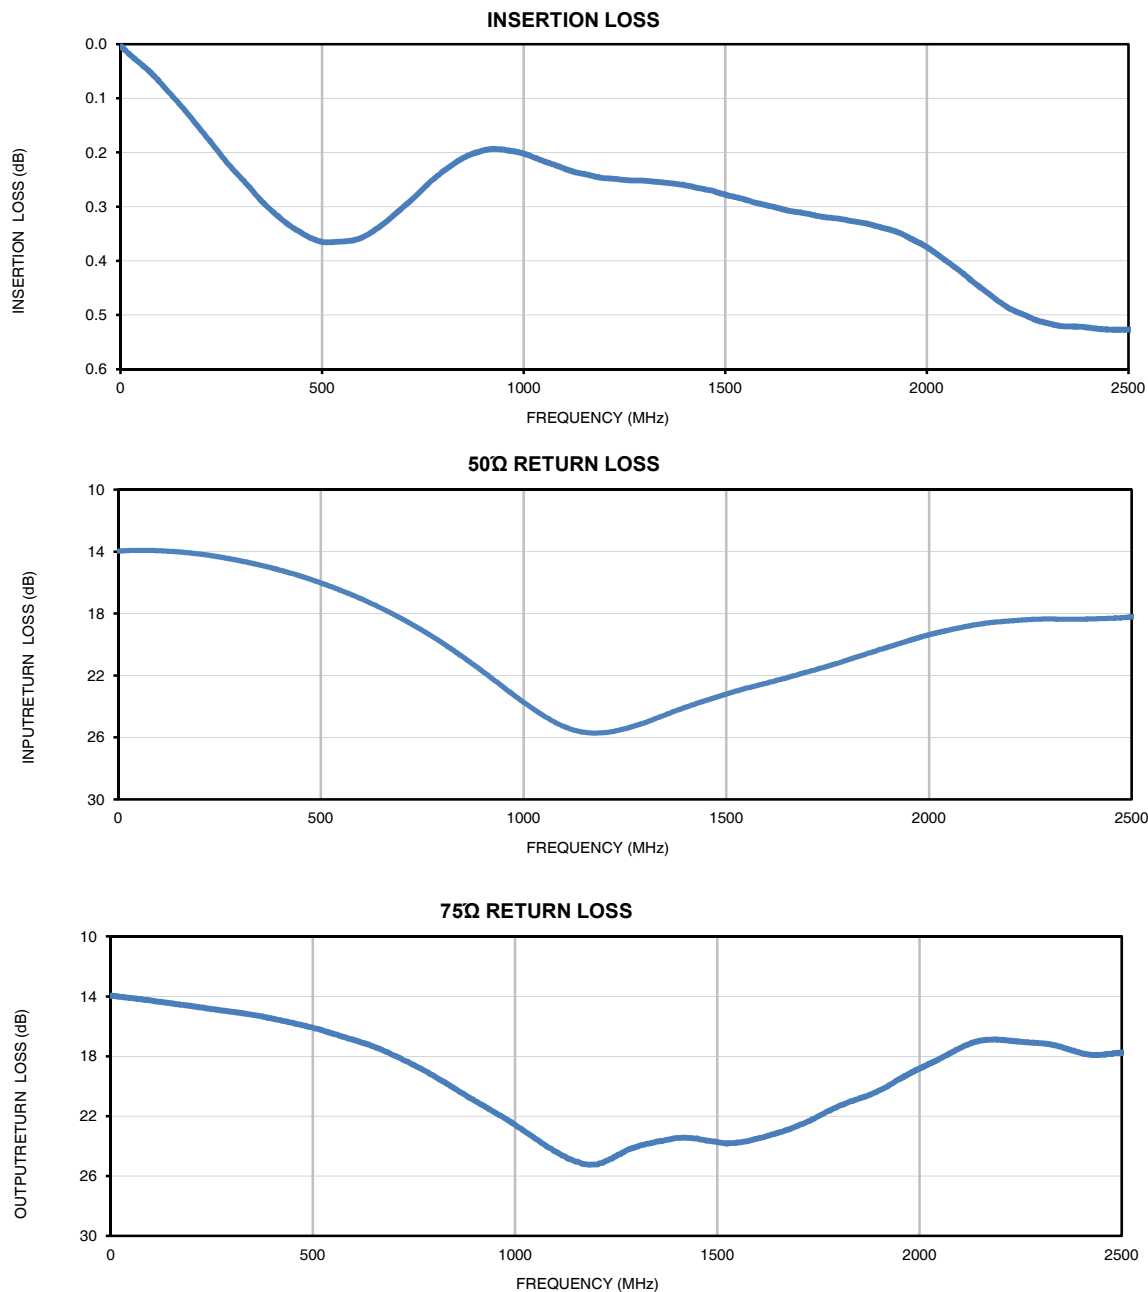


Case Style

H

Outline Dimensions

H795-10

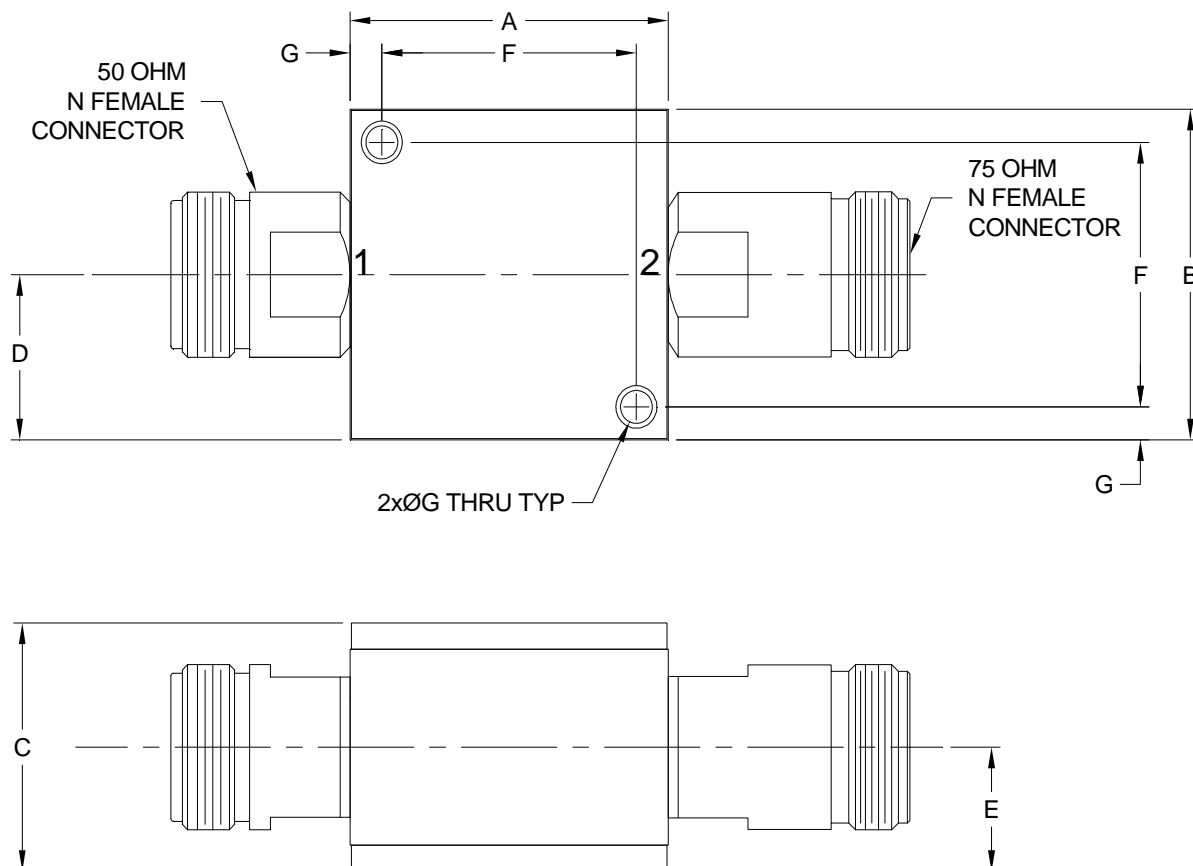

CASE#	A	B	C	D	E	F	G	WT.GRAMS
H795-10	1.25 (31.75)	1.25 (31.75)	.94 (23.88)	.63 (15.88)	.47 (11.94)	1.000 (25.40)	.125 (3.18)	83.5

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

Notes:

- Case material: Aluminum alloy.
- Case finish:
For RoHS Case Styles: Clear chemical conversion coating, non-chrome or trivalent chrome based.
- Refer to the individual model data sheet for the type of connectors available.

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I