

# Power Splitter/Combiner

## ZAPD-1+

2 Way-0° 50Ω 500 to 1000 MHz



Generic photo used for illustration purposes only

N-Type version shown

CASE STYLE: F14

Connectors	Model
BNC	ZAPD-1+
SMA	ZAPD-1-S+
N-TYPE	ZAPD-1-N+

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	10W max.
Internal Dissipation	0.125W max.
DC Current	500 mA (250mA for each port)

Permanent damage may occur if any of these limits are exceeded.

### Coaxial Connections

SUM PORT	S
PORT 1	1
PORT 2	2

### Features

- wideband, 500 to 1000 MHz
- low insertion loss, 0.25 dB typ.
- good isolation, 25 dB typ.
- up to 10W power input as splitter
- excellent amplitude unbalance, 0.1 dB typ.
- excellent phase unbalance, 0.2 deg. typ.
- excellent VSWR, 1.1:1 typ.
- rugged shielded case


### Applications

- UHF
- cellular
- communications systems
- instrumentation

### Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 3.0 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)
	Typ.	Min	Typ.	Max.	Max.	Max.
$f_c$ - $f_u$	25	19	0.25	0.6	2	0.2

### Outline Drawing

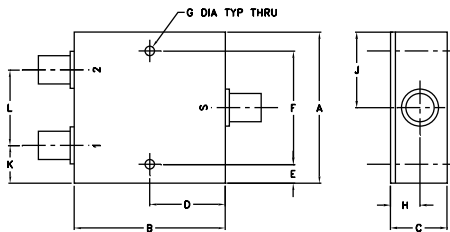




### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	
2.00	2.00	0.75	1.00	0.25	1.500	0.125	
50.80	50.80	19.05	25.40	6.35	38.10	3.18	
H	J	K	L				wt
0.39	1.00	0.50	1.00				grams
9.91	25.40	12.70	25.40				170.0


### Typical Performance Data

Frequency (MHz)	Total Loss <sup>1</sup> (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
500.00	3.14	3.14	0.00	22.98	0.10	1.09	1.10	1.10
512.50	3.15	3.13	0.02	23.95	0.07	1.07	1.10	1.09
537.50	3.14	3.14	0.00	26.20	0.02	1.04	1.09	1.08
562.50	3.16	3.17	0.01	28.96	0.07	1.02	1.08	1.08
587.50	3.17	3.17	0.00	32.19	0.13	1.03	1.07	1.07
625.00	3.15	3.16	0.00	35.73	0.08	1.06	1.07	1.07
662.50	3.17	3.17	0.00	33.23	0.13	1.08	1.07	1.07
700.00	3.17	3.17	0.00	30.16	0.09	1.09	1.08	1.08
737.50	3.22	3.22	0.00	28.42	0.10	1.09	1.09	1.09
787.50	3.23	3.22	0.01	27.39	0.13	1.08	1.11	1.11
837.50	3.08	3.08	0.00	27.65	0.10	1.05	1.12	1.12
887.50	3.34	3.35	0.01	30.13	0.11	1.05	1.13	1.13
937.50	3.23	3.22	0.01	36.50	0.24	1.09	1.13	1.13
975.00	3.18	3.18	0.00	53.09	0.19	1.14	1.13	1.12
1000.00	3.27	3.28	0.01	36.11	0.19	1.18	1.13	1.12

1. Total Loss = Insertion Loss + 3dB splitter loss.

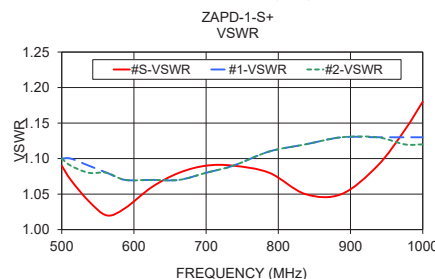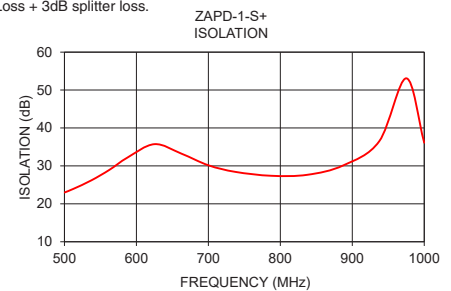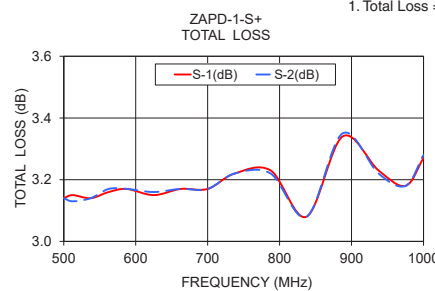

### electrical schematic

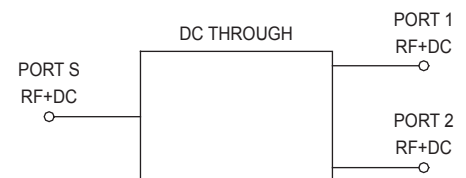

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# 2 Way-0° Power Splitter/Combiner

# ZAPD-1+

## Typical Performance Data

FREQ. (MHz)	TOTAL LOSS <sup>1</sup> (dB)		AMP. UNBAL. (dB)	ISOLATION (dB) 1-2	PHASE UNBAL. (deg.)	FREQ. (MHz)	VSWR (:1)		
	S-1	S-2					S	1	2
500.0	3.14	3.14	0.00	22.98	0.10	500.0	1.09	1.10	1.10
512.5	3.15	3.13	0.02	23.95	0.07	512.5	1.07	1.10	1.09
525.0	3.14	3.14	0.00	25.04	0.13	525.0	1.05	1.09	1.09
537.5	3.14	3.14	0.00	26.20	0.02	537.5	1.04	1.09	1.08
550.0	3.14	3.14	0.00	27.53	0.01	550.0	1.03	1.08	1.08
562.5	3.16	3.17	0.01	28.96	0.07	562.5	1.02	1.08	1.08
575.0	3.18	3.18	0.00	30.57	0.09	575.0	1.03	1.07	1.07
587.5	3.17	3.17	0.00	32.19	0.13	587.5	1.03	1.07	1.07
600.0	3.14	3.15	0.01	33.81	0.12	600.0	1.04	1.07	1.07
612.5	3.14	3.15	0.00	35.10	0.09	612.5	1.05	1.07	1.07
625.0	3.15	3.16	0.00	35.73	0.08	625.0	1.06	1.07	1.07
637.5	3.16	3.17	0.00	35.36	0.14	637.5	1.07	1.07	1.07
650.0	3.17	3.17	0.01	34.40	0.07	650.0	1.07	1.07	1.07
662.5	3.17	3.17	0.00	33.23	0.13	662.5	1.08	1.07	1.07
675.0	3.16	3.16	0.01	32.05	0.15	675.0	1.08	1.07	1.07
687.5	3.17	3.16	0.00	31.06	0.08	687.5	1.09	1.07	1.07
700.0	3.17	3.17	0.00	30.16	0.09	700.0	1.09	1.08	1.08
712.5	3.16	3.17	0.01	29.43	0.16	712.5	1.09	1.08	1.08
725.0	3.18	3.17	0.01	28.83	0.09	725.0	1.09	1.08	1.09
737.5	3.22	3.22	0.00	28.42	0.10	737.5	1.09	1.09	1.09
750.0	3.28	3.29	0.01	28.03	0.02	750.0	1.09	1.09	1.09
762.5	3.29	3.31	0.01	27.77	0.05	762.5	1.09	1.10	1.10
775.0	3.27	3.27	0.01	27.54	0.16	775.0	1.08	1.10	1.10
787.5	3.23	3.22	0.01	27.39	0.13	787.5	1.08	1.11	1.11
800.0	3.19	3.19	0.00	27.33	0.16	800.0	1.07	1.11	1.11
812.5	3.15	3.16	0.01	27.34	0.10	812.5	1.07	1.12	1.11
825.0	3.10	3.12	0.01	27.45	0.10	825.0	1.06	1.12	1.12
837.5	3.08	3.08	0.00	27.65	0.10	837.5	1.05	1.12	1.12
850.0	3.13	3.13	0.00	28.07	0.11	850.0	1.05	1.12	1.12
862.5	3.28	3.27	0.01	28.67	0.14	862.5	1.05	1.13	1.12
875.0	3.37	3.38	0.00	29.34	0.09	875.0	1.05	1.13	1.13
887.5	3.34	3.35	0.01	30.13	0.11	887.5	1.05	1.13	1.13
900.0	3.28	3.28	0.00	31.09	0.14	900.0	1.06	1.13	1.13
912.5	3.24	3.25	0.01	32.40	0.17	912.5	1.07	1.13	1.13
925.0	3.23	3.23	0.00	34.10	0.13	925.0	1.08	1.13	1.13
937.5	3.23	3.22	0.01	36.50	0.24	937.5	1.09	1.13	1.13
950.0	3.18	3.19	0.01	40.23	0.18	950.0	1.11	1.13	1.13
962.5	3.16	3.15	0.01	47.44	0.24	962.5	1.12	1.13	1.12
975.0	3.18	3.18	0.00	53.09	0.19	975.0	1.14	1.13	1.12
987.5	3.24	3.24	0.00	41.15	0.21	987.5	1.16	1.13	1.12
1000.0	3.27	3.28	0.01	36.11	0.19	1000.0	1.18	1.13	1.12






<sup>1</sup> Total Loss = Insertion Loss+ 3dB Splitter Loss



# 2 Way-0° Power Splitter/Combiner

# ZAPD-1+

## Typical Performance Curves

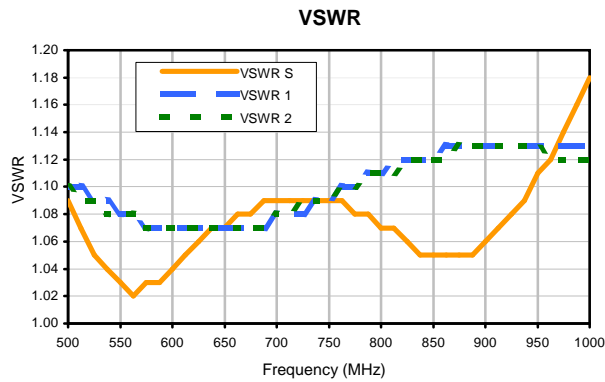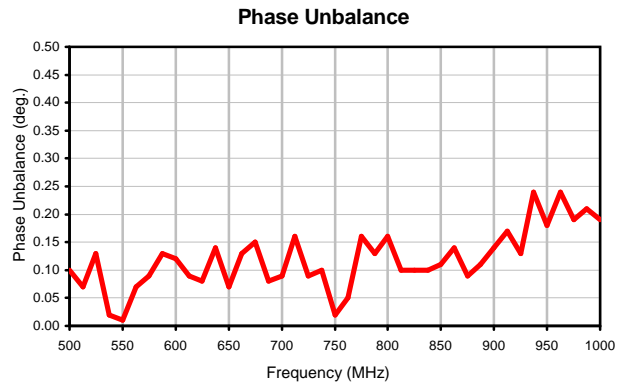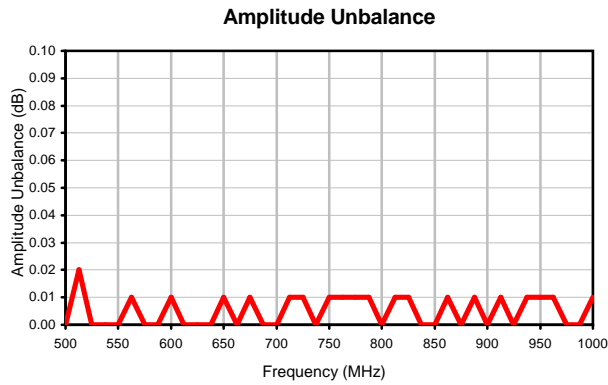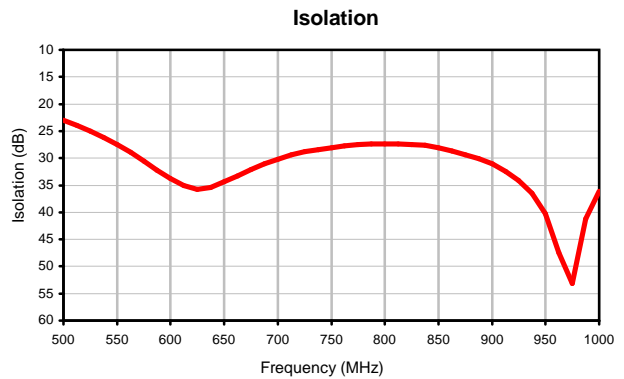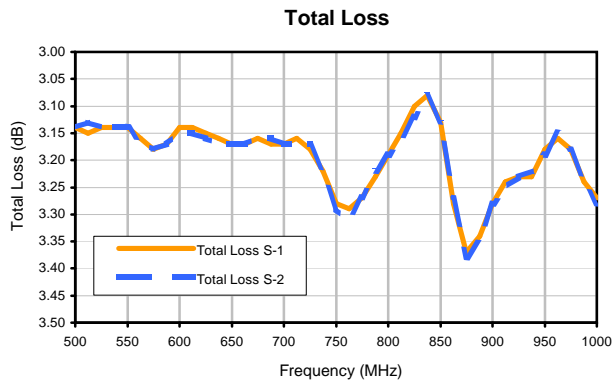

REV. X2  
ZAPD-1+  
100627  
Page 1 of 1




IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant  
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see [minicircuits.com](http://minicircuits.com)

### Outline Dimensions

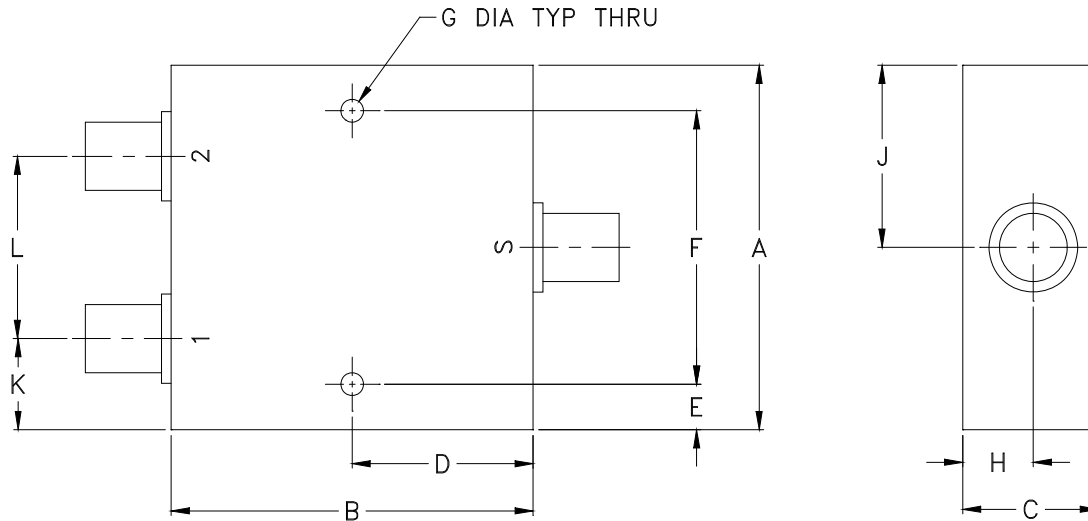

CASE #	A	B	C	D	E	F	G	H	J	K	L	WT. GRAM
F14	2.00 (50.80)	2.00 (50.80)	.75 (19.05)	1.00 (25.40)	.25 (6.35)	1.500 (38.10)	.125 (3.18)	.39 (9.91)	1.00 (25.40)	.50 (12.70)	1.00 (25.40)	170.0

Dimensions are in inches (mm). Tolerances: 2Pl.  $\pm .03$ ; 3Pl.  $\pm .015$

#### Notes:

- Case material: Aluminum alloy.
- Case finish:  
For RoHS Case Styles: Clear chemical conversion coating, non-chrome or trivalent chrome based.
- Refer to the individual model data sheet for the type of connectors available.



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I