

DC Pass, High Power

# Power Splitter/Combiner

ZC2PD-E2653+

2 Way-0° 50Ω 2000 to 65000 MHz

## The Big Deal

- Super wideband, 2 to 65 GHz
- Low insertion loss, 1.2 dB typ.
- High Isolation, 30 dB typ.
- 12W power handling
- Low amplitude unbalance, 0.1 dB typ.



CASE STYLE: UU2623

## Product Overview

Mini-Circuits' ZC2PD-E2653+ is a super wideband 2-way 0° splitter/combiner providing coverage from 2 to 65 GHz, supporting a wide range of applications including 5G, Ku, Ka, V and K-Band, instrumentation and many more. This model provides 12W power handling as a splitter and very low insertion loss across the entire operating frequency range, minimizing power dissipation and delivering excellent signal power transmission from input to output. The ZC2PD-E2653+ comes housed in a case measuring 1.04 x 1.79 x 0.5".

## Key Features

Feature	Advantages
Ultra-wideband, 2 to 65 GHz	Extremely wide frequency range supports many broadband applications in a single model. Ideal for use in wideband instrumentation
Low insertion loss, 1.2 dB typ. at 32 GHz	The combination of 12W power handling and low insertion loss makes this model a suitable candidate for distributing signals while maintaining excellent transmission of signal power.
High isolation, 30 dB typ. at 32 GHz	Minimizes interference between ports.
High power handling: • 12W as a splitter at 25°C	The ZC2PD-E2653+ is suitable for systems with a wide range of power requirements.
Low amplitude unbalance, 0.1 dB at 32 GHz	Produces nearly equal output signals, ideal for parallel path and multichannel systems.
DC Passing, 321mA	Supports applications where DC power is needed to pass through the RF line.

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# DC Pass, High Power Power Splitter/Combiner

## ZC2PD-E2653+

2 Way-0° 50Ω 2000 to 65000 MHz

### Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	12W* max.
Internal Dissipation	0.78W max.
DC Current	321mA


Permanent damage may occur if any of these limits are exceeded.

\* Derate linearly to 5.2W at 100°C

### Coaxial Connections

Sum Port	S
Port 1	1
Port 2	2


### Outline Drawing

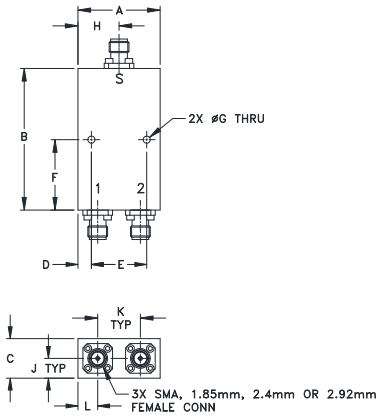

### Outline Dimensions (Inch/mm)

A	B	C	D	E	F	G
1.04	1.79	.50	.17	.700	.89	.090
26.42	45.47	12.70	4.32	17.78	22.61	2.29
H	J	K	L	wt		
.52	.25	.540	.25	grams		
13.21	6.4	13.72	6.4	55		

### Electrical Schematic



### Features

- Ultra wideband, 2000 - 65000 MHz
- Low insertion loss, 1.2 dB typ.
- Low amplitude unbalance, 0.1 dB typ.
- Excellent VSWR, 1.17:1 typ.
- High isolation, 30 dB typ.

### Applications

- 5G
- Fixed satellite
- Space research
- Mobile



Generic photo used for illustration purposes only

CASE STYLE: UU2623

Connectors	Model
1.85mm-Fem	ZC2PD-E2653+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Electrical Specifications at 25°C




Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
<b>Frequency Range</b>		2000		65000	MHz
<b>Insertion Loss Above 3.0 dB</b>	2000-18000		0.6	1.6	dB
	18000-40000		1.2	2.3	
	40000-50000		1.6	2.8	
	50000-65000		2.1	3.6	
<b>Isolation</b>	2000-18000	16	31		dB
	18000-40000	16	30		
	40000-50000	16	31		
	50000-65000	16	32		
<b>Phase Unbalance (±)¹</b>	2000-18000		0.5	4	Degree
	18000-40000		1.2	5	
	40000-50000		1.9	7	
	50000-65000		2.6	9	
<b>Amplitude Unbalance (±)¹</b>	2000-18000		0.03	0.3	dB
	18000-40000		0.05	0.4	
	40000-50000		0.07	0.6	
	50000-65000		0.10	0.8	
<b>VSWR (Port S)</b>	2000-18000		1.08	1.6	:1
	18000-40000		1.17	1.7	
	40000-50000		1.17	1.8	
	50000-65000		1.19	1.9	
<b>VSWR (Port 1-2)</b>	2000-18000		1.09	1.6	:1
	18000-40000		1.14	1.7	
	40000-50000		1.15	1.8	
	50000-65000		1.17	1.9	

1. With reference to average.

### Typical Performance Data

Frequency (MHz)	Total Loss¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
2000	3.29	3.30	0.01	31.00	0.20	1.30	1.21	1.21
3000	3.28	3.29	0.01	30.69	0.29	1.05	1.05	1.05
4000	3.33	3.34	0.01	24.36	0.36	1.05	1.13	1.13
8000	3.48	3.48	0.00	29.88	0.84	1.06	1.11	1.10
12000	3.61	3.62	0.00	27.95	1.21	1.10	1.19	1.20
18000	3.80	3.77	0.02	32.83	1.71	1.04	1.01	1.02
24000	4.04	3.99	0.04	30.35	2.27	1.23	1.17	1.16
30000	4.16	4.10	0.06	27.60	2.62	1.03	1.09	1.10
36000	4.34	4.33	0.02	26.67	2.89	1.08	1.09	1.10
40000	4.45	4.45	0.01	28.98	3.18	1.09	1.10	1.03
46000	4.62	4.70	0.08	36.61	4.09	1.21	1.18	1.16
50000	4.78	4.88	0.11	25.34	4.89	1.26	1.22	1.17
56000	4.94	5.04	0.10	28.77	5.67	1.06	1.15	1.13
60000	5.19	5.26	0.07	36.63	6.65	1.22	1.17	1.14
65000	5.25	5.34	0.09	54.29	7.92	1.13	1.12	1.26

1. Total Loss = Insertion Loss + 3dB splitter theoretical loss.

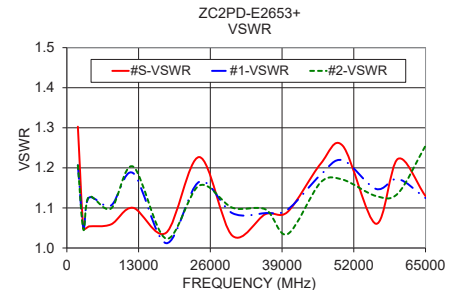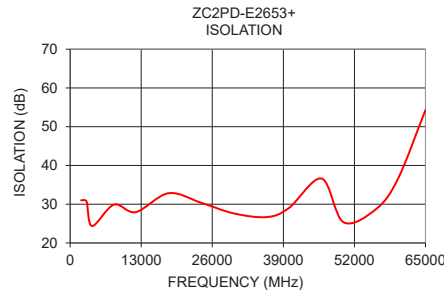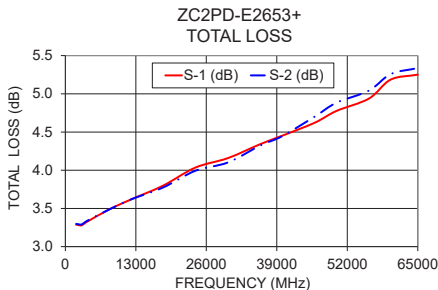

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/WCLStore/terms.jsp](http://www.minicircuits.com/WCLStore/terms.jsp)



[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. B  
ECO-005253  
ZC2PD-E2653+  
GY/CP/PS  
210315  
Page 2 of 2

# 2 Way-0° Power Splitter/Combiner

# ZC2PD-E2653+

## Typical Performance Data

TEST CONDITIONS: INPUT POWER = 0 dBm @ Temperature = +25°C

FREQUENCY (MHz)	TOTAL LOSS <sup>1</sup> (dB)		AMPLITUDE UNBALANCE (dB)	ISOLATION (dB) 1-2	PHASE UNBALANCE (Deg)	FREQUENCY (MHz)	VSWR (:1)		
	S-1	S-2					S	1	2
500	3.57	3.58	0.01	4.99	0.00	500	1.88	1.89	1.89
700	3.54	3.56	0.02	6.38	0.06	700	1.82	1.82	1.82
1000	3.49	3.51	0.02	9.45	0.10	1000	1.72	1.66	1.67
2000	3.29	3.30	0.01	31.00	0.20	2000	1.30	1.21	1.21
3000	3.28	3.29	0.01	30.69	0.29	3000	1.05	1.05	1.05
4000	3.33	3.34	0.01	24.36	0.36	4000	1.05	1.13	1.13
5000	3.38	3.40	0.02	25.53	0.54	5000	1.08	1.21	1.23
6000	3.42	3.42	0.00	26.62	0.62	6000	1.07	1.05	1.03
7000	3.46	3.47	0.01	25.48	0.72	7000	1.10	1.21	1.23
8000	3.48	3.48	0.00	29.88	0.84	8000	1.06	1.11	1.10
9000	3.52	3.52	0.00	34.56	0.90	9000	1.07	1.06	1.06
10000	3.54	3.54	0.00	32.45	1.00	10000	1.02	1.03	1.02
11000	3.58	3.58	0.00	30.09	1.06	11000	1.08	1.05	1.07
12000	3.61	3.62	0.00	27.95	1.21	12000	1.10	1.19	1.20
13000	3.68	3.67	0.01	28.93	1.29	13000	1.20	1.18	1.18
14000	3.67	3.67	0.01	38.97	1.37	14000	1.12	1.12	1.13
15000	3.76	3.75	0.01	42.54	1.48	15000	1.24	1.23	1.23
16000	3.73	3.72	0.01	37.66	1.58	16000	1.08	1.07	1.07
17000	3.82	3.79	0.02	30.08	1.68	17000	1.23	1.15	1.13
18000	3.80	3.77	0.02	32.83	1.71	18000	1.04	1.01	1.02
19000	3.85	3.82	0.02	28.02	1.80	19000	1.13	1.06	1.06
20000	3.89	3.86	0.02	27.06	1.89	20000	1.18	1.12	1.15
22000	3.98	3.95	0.03	27.96	2.06	22000	1.25	1.22	1.21
24000	4.04	3.99	0.04	30.35	2.27	24000	1.23	1.17	1.16
26000	4.06	4.02	0.04	35.50	2.35	26000	1.13	1.13	1.15
28000	4.11	4.06	0.05	29.98	2.49	28000	1.08	1.10	1.13
30000	4.16	4.10	0.06	27.60	2.62	30000	1.03	1.09	1.10
32000	4.23	4.18	0.05	29.51	2.69	32000	1.07	1.05	1.05
34000	4.28	4.24	0.04	30.59	2.69	34000	1.08	1.07	1.08
36000	4.34	4.33	0.02	26.67	2.89	36000	1.08	1.09	1.10
38000	4.39	4.38	0.01	28.27	3.01	38000	1.05	1.08	1.07
40000	4.45	4.45	0.01	28.98	3.18	40000	1.09	1.10	1.03
42000	4.47	4.51	0.04	32.51	3.30	42000	1.03	1.05	1.08
44000	4.53	4.60	0.07	38.85	3.71	44000	1.07	1.08	1.12
46000	4.62	4.70	0.08	36.61	4.09	46000	1.21	1.18	1.16
48000	4.70	4.80	0.10	28.17	4.44	48000	1.27	1.19	1.13
50000	4.78	4.88	0.11	25.34	4.89	50000	1.26	1.22	1.17
52000	4.86	4.92	0.06	27.72	5.31	52000	1.19	1.28	1.17
54000	4.88	4.95	0.08	28.61	5.39	54000	1.05	1.27	1.18
56000	4.94	5.04	0.10	28.77	5.67	56000	1.06	1.15	1.13
58000	5.04	5.14	0.10	31.92	6.28	58000	1.16	1.14	1.12
60000	5.19	5.26	0.07	36.63	6.65	60000	1.22	1.17	1.14
62000	5.21	5.29	0.08	32.13	7.05	62000	1.21	1.11	1.17
64000	5.22	5.30	0.08	41.92	7.51	64000	1.18	1.08	1.22
65000	5.25	5.34	0.09	54.29	7.92	65000	1.13	1.12	1.26
67000	5.54	5.57	0.03	30.26	8.39	67000	1.33	1.31	1.28

<sup>1</sup>Total Loss = Insertion Loss + 3dB Splitter Loss



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

IF/RF MICROWAVE COMPONENTS

REV. OR  
ZC2PD-E2653+  
4/20/2020

Page 1 of 3

# 2 Way-0° Power Splitter/Combiner

# ZC2PD-E2653+

## Typical Performance Data

TEST CONDITIONS: INPUT POWER =0 dBm @Temperature = -55°C

FREQUENCY (MHz)	TOTAL LOSS <sup>1</sup> (dB)		AMPLITUDE UNBALANCE (dB)	ISOLATION (dB) 1-2	PHASE UNBALANCE (Deg)	FREQUENCY (MHz)	VSWR (:1)		
	S-1	S-2					S	1	2
500	3.57	3.58	0.01	4.94	0.03	500	1.88	1.87	1.87
700	3.55	3.57	0.02	6.29	0.01	700	1.83	1.78	1.79
1000	3.51	3.52	0.02	9.33	0.04	1000	1.73	1.63	1.63
2000	3.29	3.30	0.01	30.34	0.10	2000	1.31	1.22	1.22
3000	3.28	3.29	0.01	29.91	0.16	3000	1.07	1.05	1.04
4000	3.32	3.33	0.01	24.54	0.18	4000	1.06	1.11	1.11
5000	3.38	3.40	0.02	26.02	0.32	5000	1.10	1.23	1.25
6000	3.41	3.42	0.00	26.98	0.35	6000	1.08	1.05	1.03
7000	3.45	3.47	0.02	26.02	0.44	7000	1.11	1.23	1.25
8000	3.47	3.48	0.00	30.79	0.50	8000	1.07	1.12	1.11
9000	3.51	3.52	0.00	35.86	0.52	9000	1.09	1.07	1.08
10000	3.53	3.53	0.00	32.85	0.57	10000	1.02	1.05	1.03
11000	3.57	3.57	0.00	29.71	0.58	11000	1.10	1.05	1.06
12000	3.59	3.60	0.01	27.37	0.68	12000	1.08	1.17	1.19
13000	3.66	3.66	0.00	28.28	0.71	13000	1.21	1.18	1.18
14000	3.65	3.65	0.00	37.20	0.76	14000	1.11	1.12	1.12
15000	3.73	3.73	0.00	41.73	0.83	15000	1.24	1.23	1.23
16000	3.70	3.70	0.00	39.30	0.88	16000	1.08	1.08	1.07
17000	3.78	3.77	0.01	30.76	0.95	17000	1.22	1.15	1.13
18000	3.75	3.75	0.00	33.81	0.94	18000	1.02	1.01	1.02
19000	3.80	3.79	0.00	28.65	0.99	19000	1.11	1.05	1.05
20000	3.83	3.83	0.00	27.81	1.03	20000	1.16	1.10	1.12
22000	3.90	3.91	0.00	28.83	1.12	22000	1.23	1.20	1.20
24000	3.95	3.95	0.00	31.15	1.28	24000	1.22	1.15	1.15
26000	3.96	3.97	0.01	37.10	1.38	26000	1.13	1.11	1.13
28000	3.99	4.01	0.02	31.52	1.50	28000	1.07	1.09	1.12
30000	4.03	4.05	0.01	28.32	1.67	30000	1.03	1.09	1.10
32000	4.10	4.11	0.01	30.15	1.78	32000	1.06	1.03	1.06
34000	4.15	4.16	0.02	31.39	1.82	34000	1.10	1.05	1.09
36000	4.20	4.23	0.03	27.44	2.06	36000	1.10	1.06	1.10
38000	4.24	4.27	0.03	29.47	2.19	38000	1.05	1.06	1.09
40000	4.30	4.32	0.01	31.35	2.36	40000	1.06	1.05	1.04
42000	4.34	4.36	0.02	34.81	2.47	42000	1.01	1.03	1.10
44000	4.41	4.43	0.02	41.31	2.79	44000	1.09	1.12	1.14
46000	4.52	4.52	0.00	34.71	2.97	46000	1.23	1.24	1.20
48000	4.58	4.58	0.01	27.78	2.99	48000	1.26	1.23	1.16
50000	4.62	4.64	0.02	24.97	3.24	50000	1.19	1.19	1.17
52000	4.68	4.65	0.03	27.28	3.47	52000	1.11	1.23	1.15
54000	4.72	4.70	0.01	29.13	3.34	54000	1.04	1.23	1.15
56000	4.79	4.81	0.02	29.70	3.48	56000	1.13	1.13	1.12
58000	4.88	4.90	0.02	35.84	3.89	58000	1.13	1.08	1.10
60000	5.00	5.01	0.01	40.12	4.24	60000	1.18	1.07	1.06
62000	5.03	5.05	0.03	33.07	4.44	62000	1.15	1.01	1.10
64000	5.08	5.10	0.02	41.54	4.73	64000	1.21	1.10	1.15
65000	5.07	5.10	0.03	37.34	4.95	65000	1.06	1.09	1.17
67000	5.30	5.31	0.00	30.50	5.30	67000	1.25	1.26	1.20

<sup>1</sup>Total Loss = Insertion Loss + 3dB Splitter Loss



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

IF/RF MICROWAVE COMPONENTS

REV. OR  
ZC2PD-E2653+  
4/20/2020

Page 2 of 3

# 2 Way-0° Power Splitter/Combiner

# ZC2PD-E2653+

## Typical Performance Data

TEST CONDITIONS: INPUT POWER =0 dBm @Temperature = +100°C

FREQUENCY (MHz)	TOTAL LOSS <sup>1</sup> (dB)		AMPLITUDE UNBALANCE (dB)	ISOLATION (dB) 1-2	PHASE UNBALANCE (Deg)	FREQUENCY (MHz)	VSWR (:1)		
	S-1	S-2					S	1	2
500	3.58	3.59	0.01	4.96	0.03	500	1.87	1.93	1.93
700	3.56	3.58	0.02	6.30	0.02	700	1.81	1.88	1.88
1000	3.51	3.53	0.02	9.34	0.06	1000	1.71	1.74	1.74
2000	3.31	3.32	0.01	34.70	0.13	2000	1.30	1.23	1.23
3000	3.31	3.32	0.01	31.46	0.19	3000	1.04	1.05	1.04
4000	3.36	3.37	0.01	24.47	0.24	4000	1.06	1.12	1.12
5000	3.41	3.43	0.02	24.83	0.37	5000	1.06	1.20	1.22
6000	3.45	3.46	0.00	25.71	0.42	6000	1.07	1.06	1.04
7000	3.49	3.51	0.02	24.66	0.49	7000	1.08	1.20	1.22
8000	3.52	3.53	0.01	29.36	0.59	8000	1.06	1.11	1.11
9000	3.55	3.56	0.01	34.59	0.62	9000	1.05	1.05	1.05
10000	3.58	3.58	0.01	33.56	0.69	10000	1.02	1.03	1.03
11000	3.62	3.62	0.00	30.94	0.71	11000	1.07	1.04	1.06
12000	3.65	3.66	0.01	28.37	0.84	12000	1.10	1.18	1.20
13000	3.71	3.71	0.00	28.51	0.89	13000	1.18	1.17	1.17
14000	3.71	3.72	0.01	35.66	0.95	14000	1.11	1.11	1.12
15000	3.79	3.79	0.00	47.01	1.04	15000	1.21	1.22	1.22
16000	3.77	3.77	0.00	40.24	1.09	16000	1.07	1.07	1.07
17000	3.84	3.84	0.00	30.84	1.17	17000	1.20	1.13	1.11
18000	3.83	3.83	0.00	33.69	1.17	18000	1.03	1.01	1.02
19000	3.87	3.87	0.00	28.86	1.22	19000	1.11	1.05	1.05
20000	3.91	3.91	0.00	27.34	1.26	20000	1.17	1.11	1.13
22000	3.99	4.00	0.00	28.74	1.37	22000	1.24	1.21	1.21
24000	4.04	4.04	0.00	31.56	1.53	24000	1.20	1.15	1.14
26000	4.06	4.07	0.02	36.82	1.60	26000	1.12	1.11	1.14
28000	4.10	4.12	0.02	30.58	1.73	28000	1.06	1.09	1.12
30000	4.14	4.16	0.02	28.19	1.90	30000	1.01	1.09	1.10
32000	4.21	4.23	0.02	31.08	1.98	32000	1.04	1.02	1.04
34000	4.27	4.29	0.02	31.89	2.02	34000	1.08	1.03	1.06
36000	4.33	4.37	0.04	27.48	2.25	36000	1.06	1.06	1.10
38000	4.39	4.42	0.04	29.07	2.39	38000	1.06	1.06	1.11
40000	4.45	4.47	0.02	29.10	2.59	40000	1.08	1.04	1.02
42000	4.49	4.52	0.03	34.06	2.71	42000	1.04	1.02	1.09
44000	4.56	4.60	0.03	44.52	3.11	44000	1.09	1.11	1.16
46000	4.67	4.69	0.02	35.58	3.35	46000	1.22	1.21	1.20
48000	4.77	4.79	0.03	27.80	3.56	48000	1.29	1.24	1.19
50000	4.85	4.88	0.03	25.77	3.84	50000	1.30	1.25	1.22
52000	4.94	4.93	0.01	28.66	4.01	52000	1.27	1.31	1.23
54000	4.94	4.94	0.00	30.04	3.87	54000	1.12	1.26	1.19
56000	4.99	5.03	0.04	29.95	4.01	56000	1.06	1.11	1.11
58000	5.09	5.13	0.04	32.16	4.40	58000	1.14	1.09	1.05
60000	5.24	5.26	0.03	35.97	4.67	60000	1.21	1.15	1.10
62000	5.27	5.31	0.04	31.32	4.85	62000	1.19	1.09	1.12
64000	5.28	5.34	0.06	40.53	5.23	64000	1.13	1.05	1.15
65000	5.32	5.38	0.07	51.39	5.51	65000	1.09	1.10	1.18
67000	5.55	5.60	0.04	30.48	5.97	67000	1.27	1.26	1.24

<sup>1</sup>Total Loss = Insertion Loss + 3dB Splitter Loss



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

IF/RF MICROWAVE COMPONENTS






REV. OR  
ZC2PD-E2653+  
4/20/2020

Page 3 of 3




# 2 Way-0° Power Splitter/Combiner

# ZC2PD-E2653+

## Typical Performance Curves

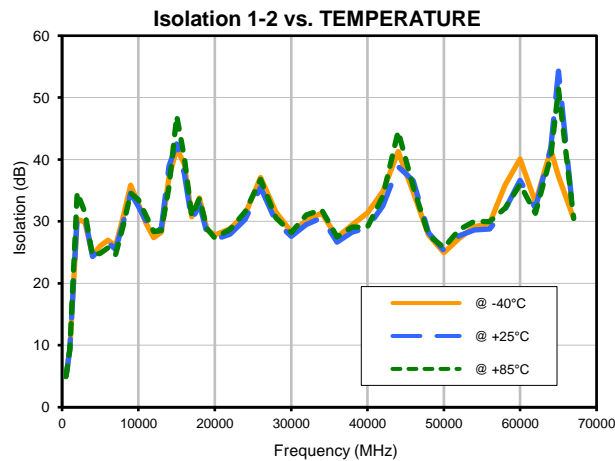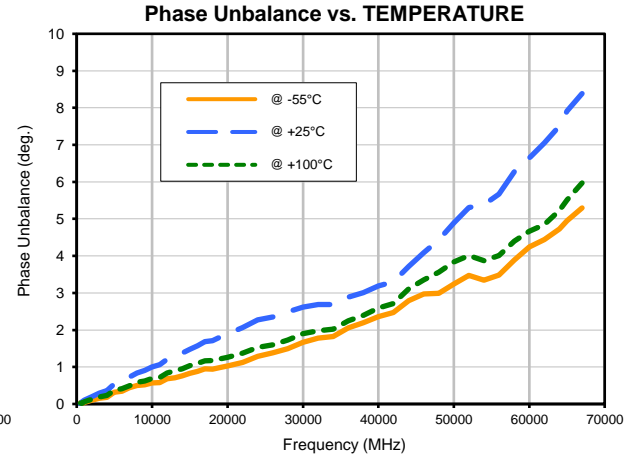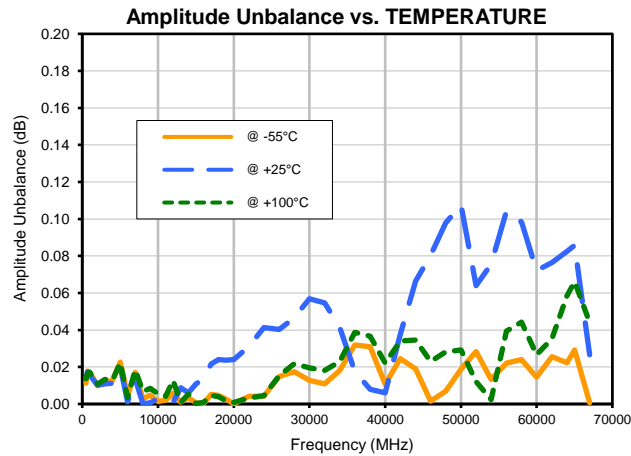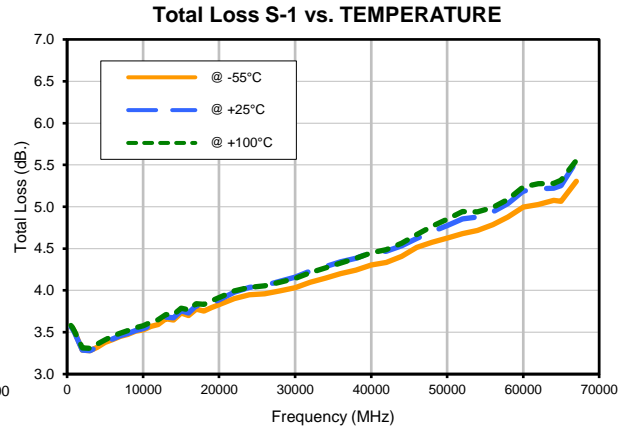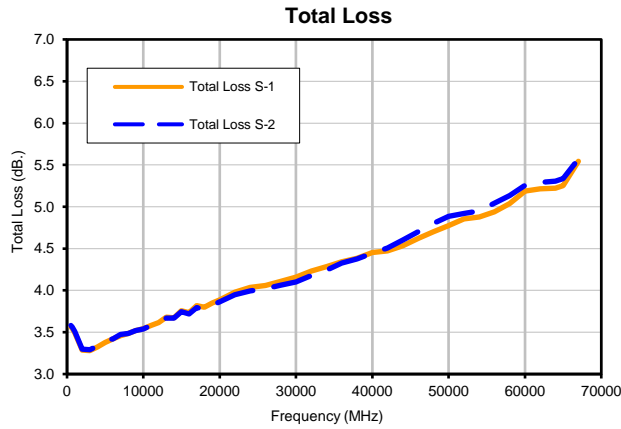

## Typical Performance Curves

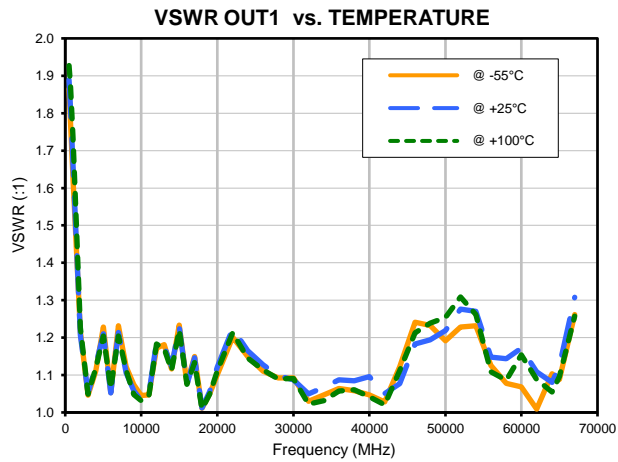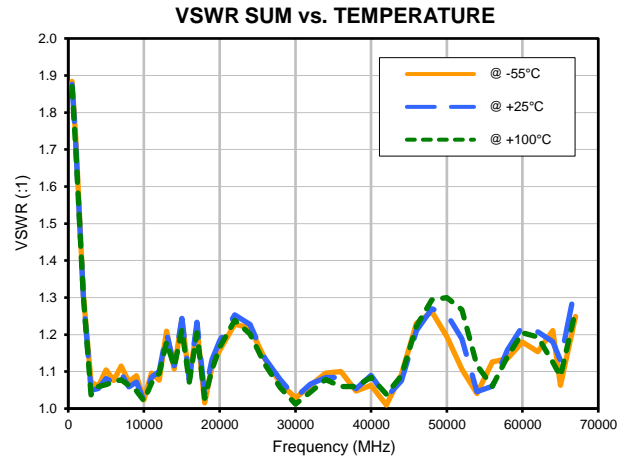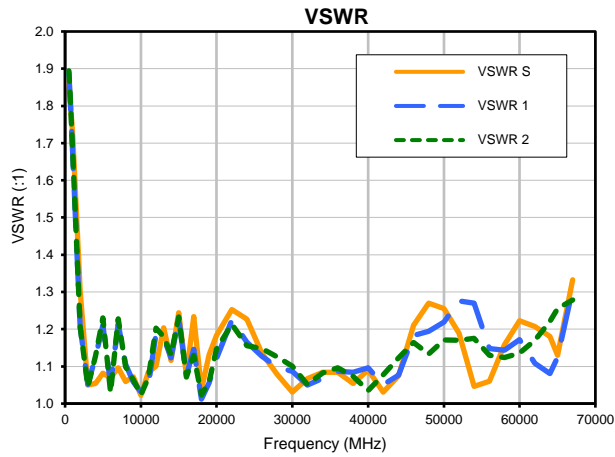


# Case Style

# UU

## Outline Dimensions

UU2623

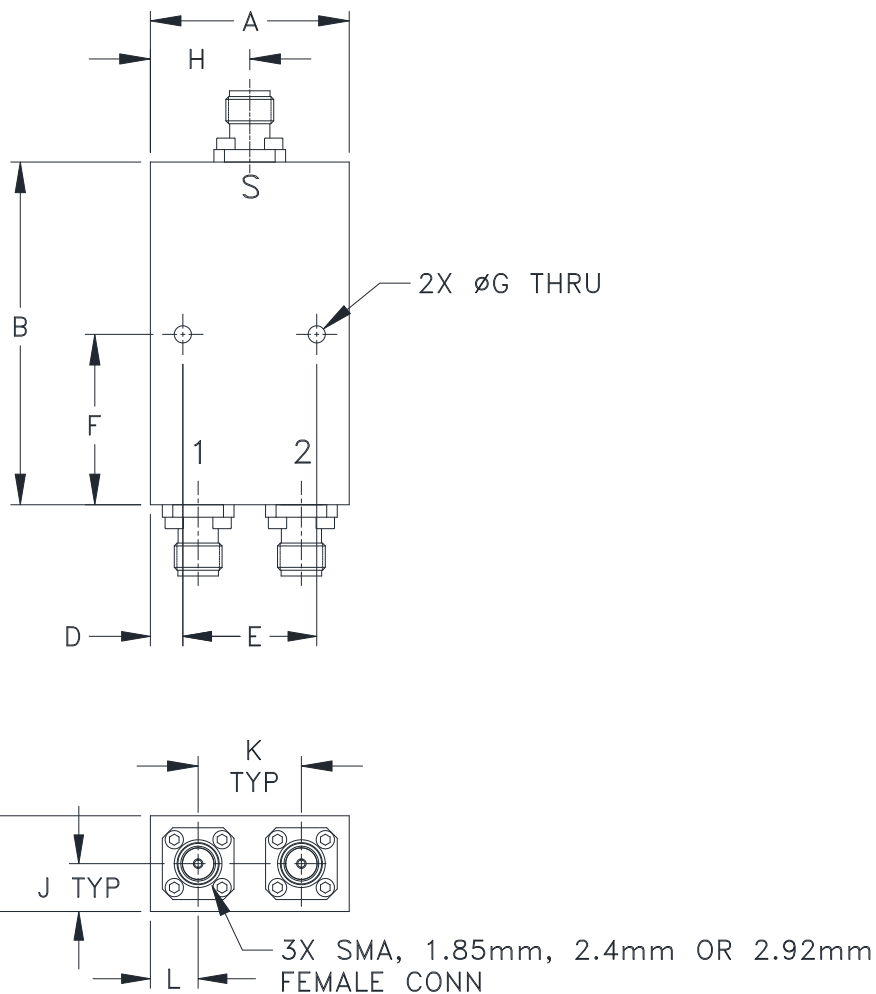

CASE#	A	B	C	D	E	F	G	H	J	K	L	WT, GRAMS
UU2623	1.04 (26.42)	1.79 (45.47)	.50 (12.70)	.17 (4.32)	.700 (17.78)	.89 (22.61)	.090 (2.40)	.52 (13.20)	.25 (6.40)	.540 (13.72)	.25 (6.40)	55

Dimensions are in inches (mm). Tolerances: 2 Pl. + .03; 3 Pl. + .015

### Notes:

1. Case material: Aluminum alloy.
2. Case finish: Painting. Color: Blue.
3. Refer to the individual model data sheet for the type of connectors available.

**Mini-Circuits®**  
ISO 9001 ISO 14001 CERTIFIED

ALL NEW  
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS





All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 25 cycles	MIL-STD-202, Method 107, Condition A-1 except +100°C instead of 85°C
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I
Connector Durability	500 mating/unmating cycles	MIL-PRF-39012E, PARAGRAPH 4.6.12