

# Coaxial Bias-Tee

75Ω Wideband 10 to 3000 MHz

## ZFBT-33-75-FT+



Generic photo used for illustration purposes only

CASE STYLE: K1486

Connectors Model

N-Type ZFBT-33-75-FT+

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	30 dBm max.
Voltage at DC port	30 V max.
Input Current	200 mA

Permanent damage may occur if any of these limits are exceeded.

### Coaxial Connections

RF	2 (N-female)
RF & DC	1 (N-male)
DC	(feed-through pin)
GROUND	GROUND


### Outline Drawing

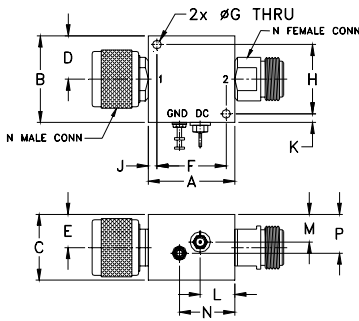

### Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H
1.25	1.25	.95	.63	.47	1.00	.125	1.000
31.75	31.75	24.13	16.00	11.94	25.40	3.18	25.40
J	K	L	M	N	P	wt	
.13	.13	.50	.40	.80	.56	grams	
3.18	3.18	12.70	10.16	20.32	14.22	117.0	

### Electrical Schematic

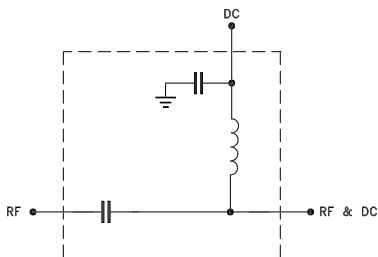

#### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

### Features

- wideband, 10 to 3000 MHz
- low insertion loss, 0.15 dB typ.
- feed through terminal per DC port
- excellent VSWR, 1.13:1 typ.

### Applications

- biasing amplifiers
- biasing of laser diodes
- biasing of active antennas
- test accessory

### Electrical Specifications at 25°C


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
<b>Frequency Range</b>		10		3000	MHz
<b>Insertion Loss<sup>1</sup></b>	10-100	—	0.15	0.5	
	100-1500	—	0.15	0.6	dB
	1500-3000	—	0.2	0.8	
<b>VSWR<sup>1</sup></b>	10-100	—	1.25	1.5	
	100-1500	—	1.13	1.35	:1
	1500-3000	—	1.13	1.35	
<b>DC Resistance, DC to RF and DC port</b>	10 - 3000	—	1.0	—	ohms

1. Specifications and typical performance are relevant to input RF power up to +20dBm and DC Current up to 200mA.


### Typical Performance Data

Frequency (MHz)	INSERTION LOSS (dB)	VSWR (:1)	
		RF	RF&DC
10.00	0.12	1.26	1.26
50.00	0.03	1.04	1.04
100.00	0.03	1.01	1.01
400.00	0.10	1.04	1.04
500.00	0.10	1.06	1.06
800.00	0.12	1.09	1.11
1000.00	0.20	1.13	1.14
1400.00	0.24	1.20	1.17
1500.00	0.23	1.20	1.18
1800.00	0.17	1.16	1.21
2000.00	0.12	1.19	1.21
2400.00	0.22	1.20	1.17
2500.00	0.28	1.17	1.17
2800.00	0.37	1.11	1.16
3000.00	0.34	1.14	1.15

ZFBT-33-75-FT+ INSERTION LOSS

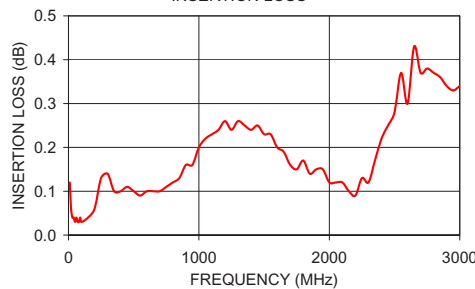



ZFBT-33-75-FT+ VSWR

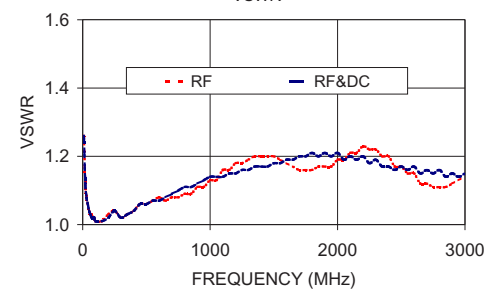


*Typical Performance Data*

FREQ	INSERTION LOSS	VSWR	
		RF	RF & DC
(MHz)	(dB)	(:1)	
10.0	0.12	1.26	1.26
50.0	0.03	1.04	1.04
100.0	0.03	1.01	1.01
150.0	0.04	1.01	1.01
200.0	0.06	1.03	1.02
300.0	0.14	1.02	1.02
400.0	0.10	1.04	1.04
500.0	0.10	1.06	1.06
600.0	0.10	1.08	1.07
700.0	0.10	1.08	1.09
800.0	0.12	1.09	1.11
900.0	0.16	1.11	1.12
1000.0	0.20	1.13	1.14
1100.0	0.23	1.16	1.14
1200.0	0.26	1.18	1.15
1300.0	0.26	1.19	1.16
1400.0	0.24	1.20	1.17
1500.0	0.23	1.20	1.18
1600.0	0.20	1.18	1.19
1650.0	0.19	1.17	1.19
1700.0	0.16	1.16	1.20
1750.0	0.15	1.16	1.20
1800.0	0.17	1.16	1.21
1850.0	0.14	1.17	1.20
1900.0	0.15	1.17	1.21
1950.0	0.15	1.17	1.20
2000.0	0.12	1.19	1.21
2050.0	0.12	1.19	1.19
2100.0	0.12	1.21	1.20
2150.0	0.10	1.21	1.19
2200.0	0.09	1.23	1.20
2250.0	0.13	1.22	1.18
2300.0	0.12	1.22	1.19
2350.0	0.17	1.20	1.17
2400.0	0.22	1.20	1.17
2450.0	0.25	1.17	1.16
2500.0	0.28	1.17	1.17
2550.0	0.37	1.15	1.16
2600.0	0.30	1.15	1.17
2650.0	0.43	1.12	1.15
2700.0	0.37	1.12	1.16
2750.0	0.38	1.11	1.15
2800.0	0.37	1.11	1.16
2850.0	0.36	1.11	1.14
2900.0	0.34	1.12	1.15
2950.0	0.33	1.13	1.14
3000.0	0.34	1.14	1.15

## Typical Performance Curves

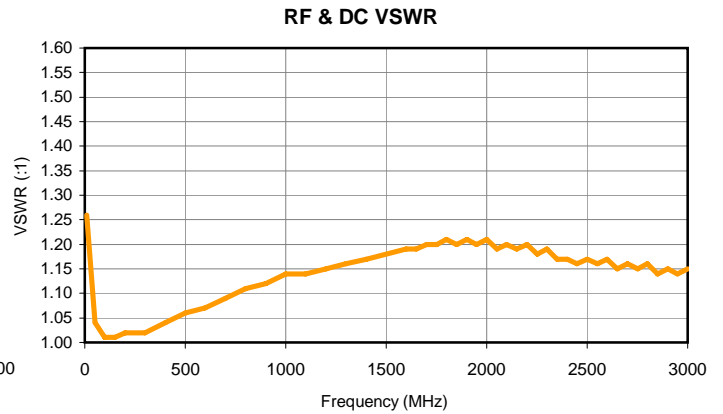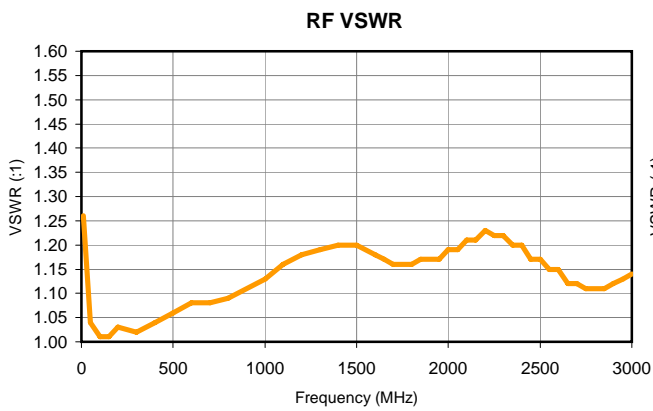

### Outline Dimensions

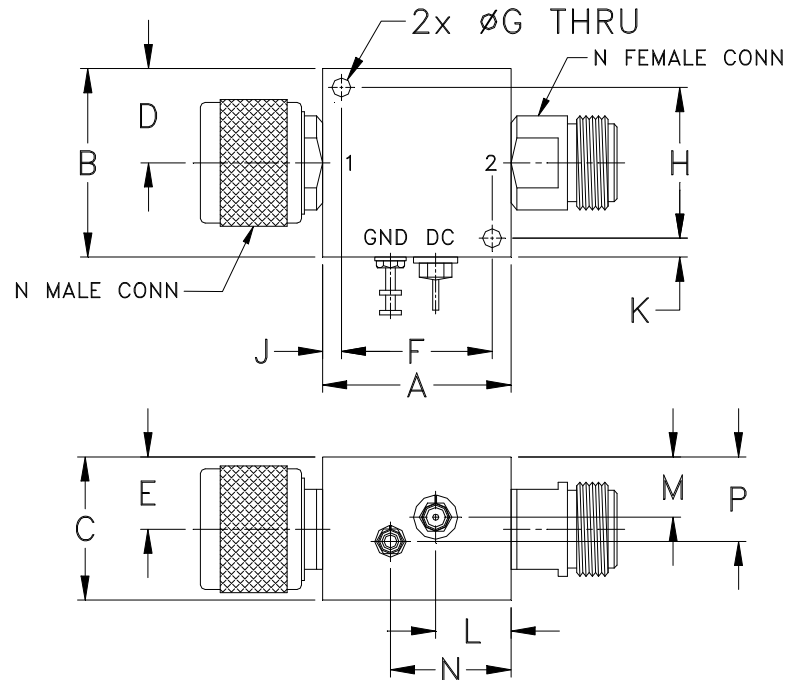

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N
K1486	1.25 (31.75)	1.25 (31.75)	.95 (24.13)	.63 (16.00)	.47 (11.94)	1.000 (25.40)	.125 (3.18)	1.000 (25.40)	.13 (3.18)	.13 (3.18)	.50 (12.70)	.40 (10.16)	.80 (20.32)

CASE#	P	Q	WT. GRAMS
K1486	.56 (14.22)	--	117.0

Dimensions are in inches (mm). Tolerances: 2 Pl.  $\pm .03$ ; 3 Pl.  $\pm .015$

#### Notes:

1. Case material: Aluminum alloy.
2. Case finish:  
For RoHS Case Styles: Clear chemical conversion coating, non-chrome or trivalent chrome based.
3. Refer to the individual model data sheet for the type of connectors available

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

<b>Specification</b>	<b>Test/Inspection Condition</b>	<b>Reference/Spec</b>
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I