

Coaxial Power Splitter/Combiner

ZFSC-12-1+

12 Way-0° 50Ω 1 to 200 MHz

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.87W max.

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

SUM PORT	S(COM)
PORT 1,2,3,.....,12	1,2,3,.....,12

Outline Drawing

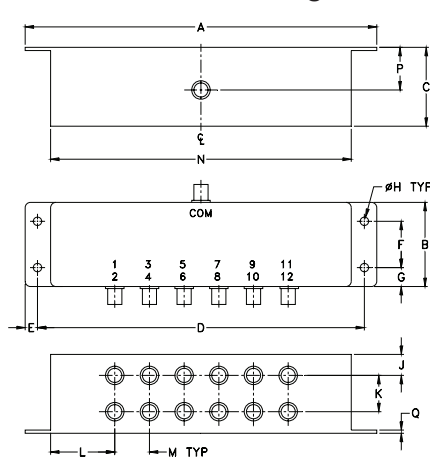

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
6.69	1.60	1.50	6.22	.24	.88	.36	.160
169.93	40.64	38.10	157.99	6.10	22.35	9.14	4.06
J	K	L	M	N	P	Q	wt.
.40	.69	1.22	.66	5.72	.81	.06	grams
10.16	17.53	30.99	16.76	145.29	20.57	1.52	310.0

Features

- high isolation, 35 dB typ.
- excellent amplitude unbalance, 0.2 dB typ.
- rugged shielded case

Applications

- HF/VHF
- instrumentation
- communication systems



Generic photo used for illustration purposes only

CASE STYLE: R67

Connectors	Model
BNC	ZFSC-12-1+
SMA	ZFSC-12-1-S+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 10.8 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L	M	U	L	M	U
	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
f_L - f_U							0.8	1.2	1.1	1.4	1.3	1.6	4	8	16	0.3	0.2	0.3
1-200	30	25	35	20	28	20												

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]




Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)	Amplitude Unbalance (dB)	Isolation (dB)		Phase Unbalance (deg.)	VSWR S	VSWR 12
			1-3	2-4			
			1.00	11.49			
2.60	11.33	0.02	36.03	55.64	0.08	1.12	1.19
4.20	11.28	0.01	37.46	54.20	0.07	1.09	1.16
7.00	11.27	0.01	38.46	51.38	0.06	1.07	1.14
10.00	11.28	0.01	38.83	49.13	0.09	1.06	1.14
31.00	11.38	0.01	37.76	40.69	0.34	1.05	1.13
52.00	11.46	0.02	35.95	36.66	0.59	1.05	1.13
73.00	11.52	0.03	34.57	34.40	0.82	1.06	1.12
88.00	11.54	0.04	33.72	33.29	0.97	1.07	1.11
100.00	11.57	0.06	33.27	32.66	1.14	1.07	1.10
124.00	11.62	0.08	32.73	31.90	1.42	1.09	1.10
156.00	11.68	0.13	32.91	31.60	1.87	1.10	1.11
180.00	11.75	0.18	33.65	31.49	2.23	1.12	1.13
192.00	11.79	0.21	34.19	31.36	2.43	1.13	1.15
200.00	11.80	0.22	34.48	31.18	2.59	1.14	1.16

ZFSC-12-1-S+ TOTAL LOSS

1. Total Loss = Insertion Loss + 10.8dB splitter loss.

ZFSC-12-1-S+ ISOLATION

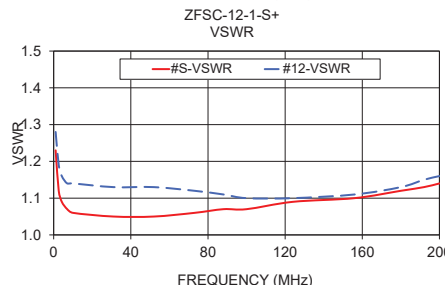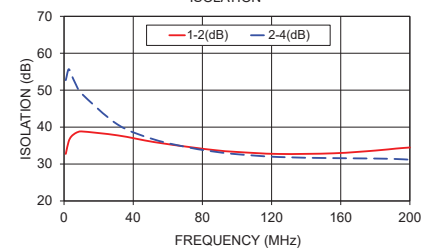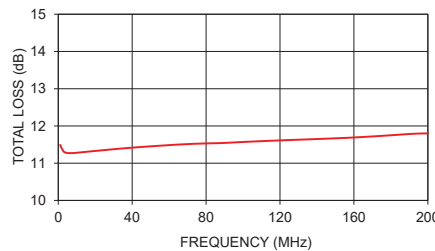

electrical schematic



Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/WCLStore/terms.jsp



12 Way-0° Power Splitter/Combiner

ZFSC-12-1+

Typical Performance Data

FREQ. (MHz)	TOTAL LOSS ¹ (dB)	AMP. UNBAL. (dB)	ISOLATION (dB)		PHASE UNBAL. (deg.)	FREQ. (MHz)	VSWR (:1)	
			Adjacent	Opposite			S	OUTPUTS
1.0	11.49	0.03	32.74	52.71	0.08	1.0	1.23	1.28
1.8	11.39	0.02	34.78	55.87	0.11	1.8	1.16	1.22
2.6	11.33	0.02	36.03	55.64	0.08	2.6	1.12	1.19
3.4	11.30	0.02	36.89	55.03	0.08	3.4	1.10	1.17
4.2	11.28	0.01	37.46	54.20	0.07	4.2	1.09	1.16
5.0	11.28	0.01	37.88	53.44	0.05	5.0	1.08	1.15
6.0	11.27	0.01	38.25	52.18	0.04	6.0	1.07	1.15
7.0	11.27	0.01	38.46	51.38	0.06	7.0	1.07	1.14
8.0	11.27	0.01	38.61	50.57	0.07	8.0	1.06	1.14
9.0	11.28	0.01	38.75	49.76	0.11	9.0	1.06	1.14
10.0	11.28	0.01	38.83	49.13	0.09	10.0	1.06	1.14
17.0	11.31	0.01	38.78	45.36	0.21	17.0	1.05	1.13
24.0	11.35	0.01	38.39	42.69	0.28	24.0	1.05	1.13
31.0	11.38	0.01	37.76	40.69	0.34	31.0	1.05	1.13
38.0	11.41	0.01	37.18	39.10	0.40	38.0	1.05	1.13
45.0	11.43	0.02	36.63	37.81	0.48	45.0	1.05	1.13
52.0	11.46	0.02	35.95	36.66	0.59	52.0	1.05	1.13
59.0	11.49	0.02	35.45	35.80	0.62	59.0	1.05	1.13
66.0	11.50	0.02	34.94	35.06	0.73	66.0	1.06	1.12
73.0	11.52	0.03	34.57	34.40	0.82	73.0	1.06	1.12
80.0	11.52	0.03	34.17	33.86	0.89	80.0	1.06	1.11
84.0	11.53	0.03	33.91	33.53	0.98	84.0	1.06	1.11
88.0	11.54	0.04	33.72	33.29	0.97	88.0	1.07	1.11
92.0	11.55	0.05	33.57	33.09	1.07	92.0	1.07	1.11
96.0	11.56	0.05	33.40	32.84	1.14	96.0	1.07	1.10
100.0	11.57	0.06	33.27	32.66	1.14	100.0	1.07	1.10
108.0	11.59	0.06	33.05	32.31	1.25	108.0	1.08	1.10
116.0	11.60	0.07	32.88	32.08	1.36	116.0	1.08	1.10
124.0	11.62	0.08	32.73	31.90	1.42	124.0	1.09	1.10
132.0	11.64	0.09	32.72	31.77	1.51	132.0	1.09	1.10
140.0	11.67	0.10	32.74	31.65	1.67	140.0	1.09	1.10
148.0	11.67	0.12	32.83	31.61	1.75	148.0	1.10	1.10
156.0	11.68	0.13	32.91	31.60	1.87	156.0	1.10	1.11
164.0	11.69	0.14	33.14	31.60	2.00	164.0	1.11	1.11
172.0	11.72	0.15	33.36	31.52	2.15	172.0	1.12	1.12
180.0	11.75	0.18	33.65	31.49	2.23	180.0	1.12	1.13
184.0	11.77	0.19	33.85	31.47	2.30	184.0	1.13	1.14
188.0	11.79	0.20	33.94	31.41	2.38	188.0	1.13	1.14
192.0	11.79	0.21	34.19	31.36	2.43	192.0	1.13	1.15
196.0	11.80	0.21	34.31	31.27	2.51	196.0	1.14	1.15
200.0	11.80	0.22	34.48	31.18	2.59	200.0	1.14	1.16

¹ Total Loss = Insertion Loss+ 10.8dB Splitter Loss

REV. X2
ZFSC-12-1+
100627
Page 1 of 1



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661








The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



12 Way-0° Power Splitter/Combiner

ZFSC-12-1+

Typical Performance Curves

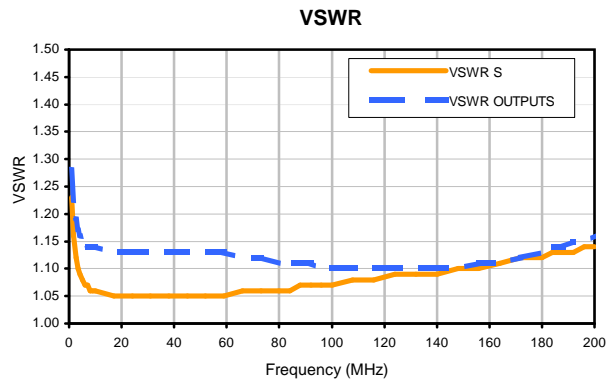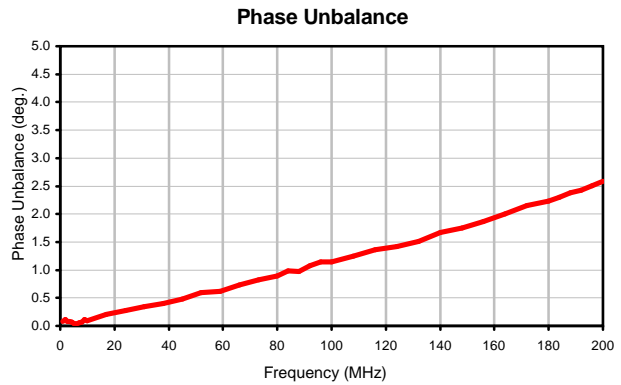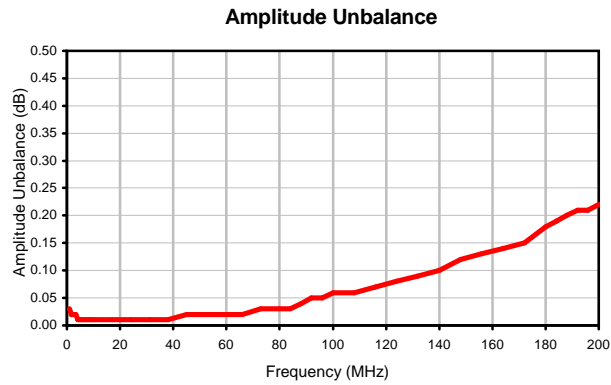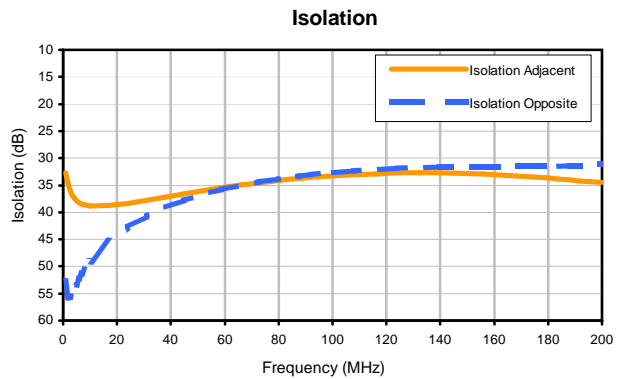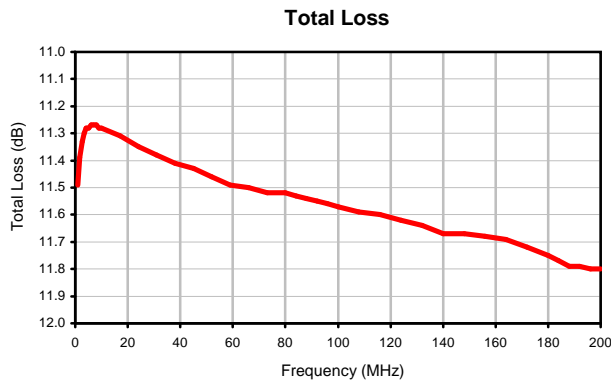

REV. X2
ZFSC-12-1+
100627
Page 1 of 1




IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Outline Dimensions

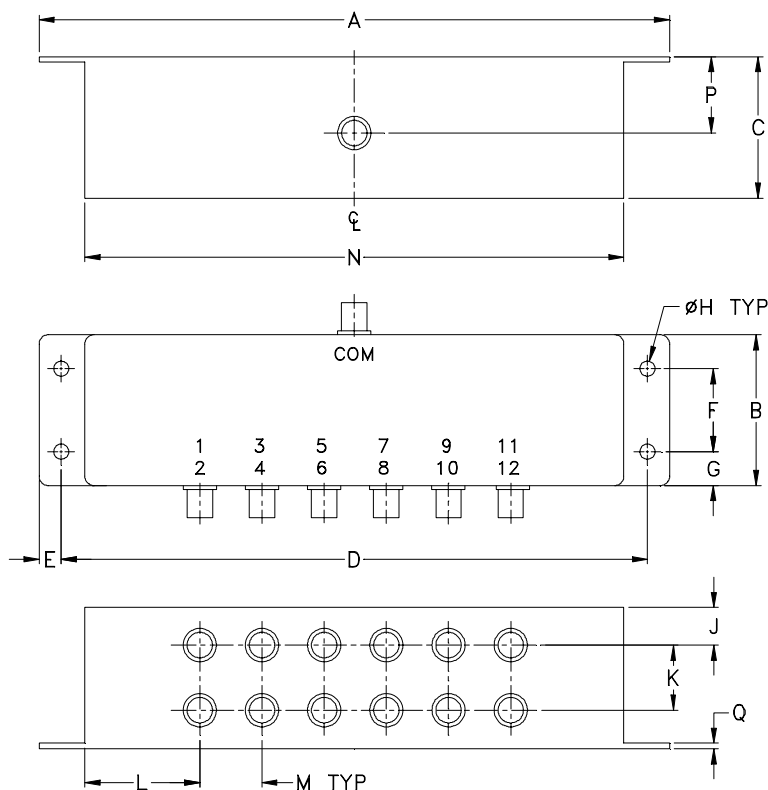

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N
R67	6.69 (169.93)	1.60 (40.64)	1.50 (38.10)	6.22 (157.99)	.24 (6.10)	.88 (22.35)	.36 (9.14)	.160 (4.06)	.40 (10.16)	.69 (17.53)	1.22 (30.99)	.66 (16.76)	5.72 (145.29)

CASE#	P	Q	WT. GRAMS
R67	.81 (20.57)	.06 (1.53)	310.0

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

Notes:

- Case material: Aluminum alloy.
- Case finish:
For RoHS Case Styles: Clear chemical conversion coating, non-chrome or trivalent chrome based.



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I