



(LTCC) COAXIAL

# High Pass Filter

## ZHFG-K4000+

50Ω 4500 to 18000 MHz 2.92mm Female

### KEY FEATURES

- Low Insertion Loss, 1.2 dB Typ.
- Return Loss, 12 dB Typ.
- Stop Band Rejection, 45 dB Typ.
- Broadband Connectorized Package.
- Power Handling: 3 Watts

### APPLICATIONS

- Test and Measurement Equipment.
- Military Applications.
- Telecommunications and Broadband Wireless Systems.
- 5G Sub 6 GHz.
- WiFi 6E and X-Band Radar.


### PRODUCT OVERVIEW

ZHFG-K4000+ is a 50ohm high pass filter built in broad band connectorized package. Covering 4500-18000 MHz bandwidth, these units offer good matching within the passband and good rejection in stopband. ZHFG-K4000+ offer low insertion loss, and excellent power handling capability. It handles up to 3 W RF input power and provides a wide operating temperature range from -55°C to 125°C.



Generic photo used for illustration purposes only

### FUNCTIONAL DIAGRAM

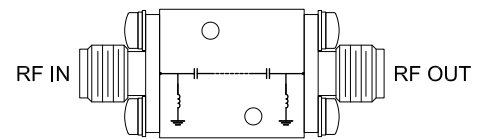

### ELECTRICAL SPECIFICATIONS<sup>1,2</sup> AT +25°C

Parameter		F#	Frequency (MHz)	Min.	Typ.	Max.	Units
Pass Band	Insertion Loss	F3-F4	4500 - 5200	—	2.0	—	dB
		F4-F5	5200 - 5600	—	1.3	2.4	
		F5-F6	5600 - 16000	—	1.2	2.0	
		F6-F7	16000 - 18000	—	1.5	—	
	Return Loss	F3-F4	4500 - 18000	—	12	—	dB
Stop Band	Rejection	DC-F1	DC - 2500	36	46	—	dB
		F1-F2	2500 - 3200	25	40	—	dB
	Freq. Cut-Off <sup>3</sup>	Fc <sup>3</sup>	4100	—	3	—	dB

1. This filter is bi-directional, RF1 and RF2 ports may be interchanged, see S-Parameters for actual performance.

2. This component should not be used as a DC-block. In applications where DC voltage and/or current is present at either the input or output ports, external DC blocking capacitors are required.

3. Typical variation ± 5%


### ABSOLUTE MAXIMUM RATINGS<sup>4</sup>

Parameter	Ratings
Operating Temperature	-55 °C to +125 °C
Storage Temperature	-55 °C to +125 °C
Input Power <sup>5</sup>	3 W @25°C

4. Permanent damage may occur if any of these limits are exceeded.

5. Power rating applies only to signals within the passband. Power rating above +25°C operating temperature decreases linearly to 0.6 W at +125°C.

### TYPICAL FREQUENCY RESPONSE AT +25°C

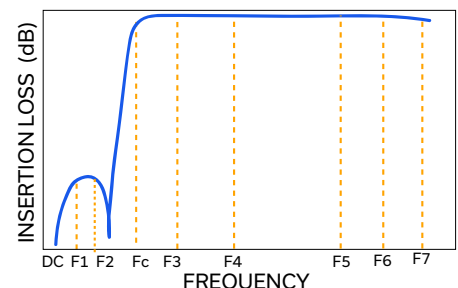







(LTCC) COAXIAL

# High Pass Filter

## ZHFG-K4000+

50Ω 4500 to 18000 MHz 2.92mm Female

### TYPICAL PERFORMANCE GRAPHS

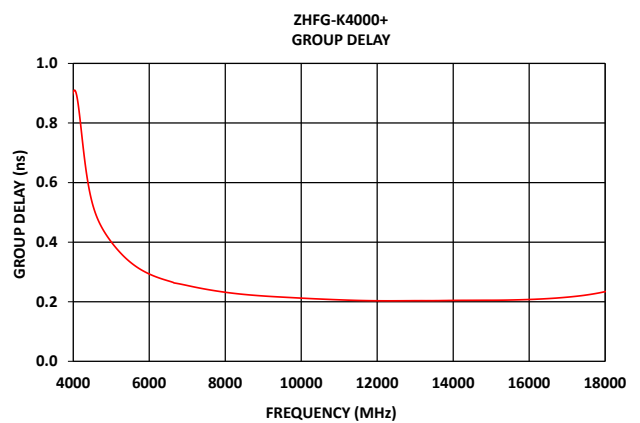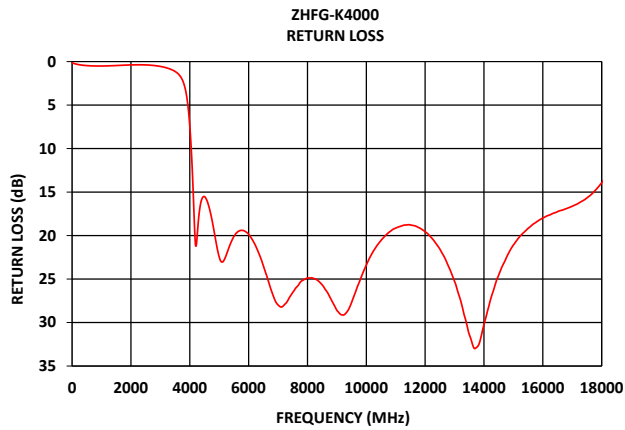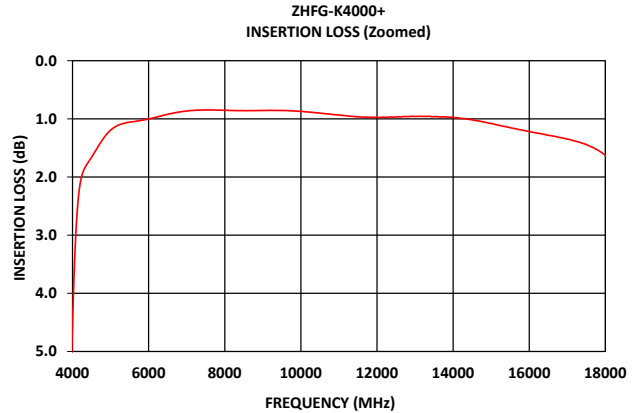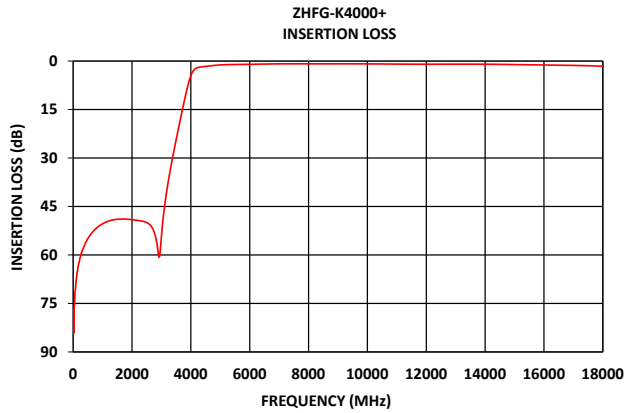



(LTCC) COAXIAL

# High Pass Filter


## ZHFG-K4000+

50Ω 4500 to 18000 MHz 2.92mm Female

### CONNECTOR DESCRIPTION

Function	Marking on Unit	Connector
RF1 <sup>1</sup>	1	2.92mm Female
RF2 <sup>1</sup>	2	2.92mm Female

### CASE STYLE DRAWING

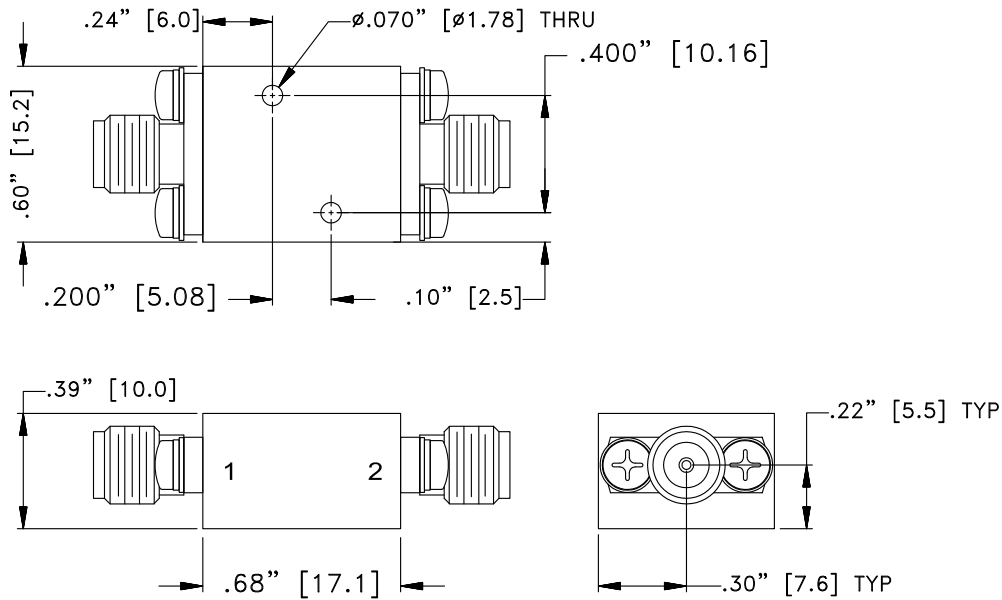

Unit weight: 24grams

Dimensions are in inches (mm). Tolerances: 2 Pl.±.050"; 3 Pl.±.015"

**PRODUCT MARKING\*:** ZHFG-K4000+

\*Marking may contain other features or characters for internal lot control.



(LTCC) COAXIAL

# High Pass Filter

## ZHFG-K4000+

50Ω 4500 to 18000 MHz 2.92mm Female

ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD

[CLICK HERE](#)

Performance Data & Graphs	Data Graphs S-Parameter (S2P Files) Data Set (.zip file)
Case Style	UK3042
RoHS Status	Compliant
Environmental Ratings	ENV124

#### NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)







# Coaxial High Pass Filter

# ZHFG-K4000+

## Typical Performance Data


FREQ.	Insertion Loss	Input Return Loss	Output Return Loss	FREQ.	Group Delay
(MHz)	(dB)	(dB)	(dB)	(MHz)	(ns)
10	77.12	0.13	0.09	4500	0.53
20	84.10	0.15	0.10	4600	0.49
40	75.88	0.19	0.12	4700	0.46
100	68.17	0.25	0.17	4800	0.44
120	66.58	0.27	0.18	4900	0.42
200	62.39	0.33	0.27	5000	0.40
300	58.97	0.39	0.29	5200	0.37
400	56.62	0.43	0.36	5300	0.36
500	54.92	0.46	0.37	5400	0.34
600	53.56	0.48	0.42	5500	0.33
700	52.51	0.50	0.43	5600	0.32
800	51.61	0.50	0.46	5700	0.31
900	50.90	0.51	0.46	5800	0.31
1000	50.36	0.51	0.48	5900	0.30
1500	48.94	0.45	0.44	6000	0.29
2000	49.07	0.38	0.35	6200	0.28
2500	49.99	0.38	0.35	6400	0.27
3000	54.25	0.55	0.55	6500	0.27
3200	39.10	0.71	0.69	6600	0.27
4000	4.55	7.37	7.66	6700	0.26
4100	2.83	13.61	15.29	6800	0.26
4500	1.66	15.52	14.58	6900	0.26
5200	1.11	22.57	23.68	7000	0.25
5600	1.05	19.66	20.00	7500	0.24
6000	1.00	19.85	19.51	8000	0.23
7000	0.87	27.97	31.81	8500	0.22
8500	0.86	25.66	24.48	9000	0.22
9000	0.86	28.60	26.48	9500	0.22
10000	0.87	23.41	24.34	10000	0.21
10200	0.88	22.03	22.82	10200	0.21
10400	0.90	20.99	21.62	10400	0.21
10600	0.91	20.18	20.61	10600	0.21
10800	0.92	19.55	19.85	10800	0.21
11000	0.94	19.14	19.32	11000	0.21
11200	0.95	18.89	19.01	11200	0.21
11400	0.96	18.76	18.85	11400	0.20
11600	0.97	18.84	18.89	11600	0.20
11800	0.97	19.11	19.08	11800	0.20
12000	0.97	19.56	19.47	12000	0.20
12200	0.97	20.20	20.02	12200	0.20
12400	0.97	21.07	20.81	12400	0.20
12600	0.97	22.16	21.79	12600	0.20
12800	0.96	23.58	23.12	12800	0.20
13000	0.96	25.27	24.78	13000	0.20
13200	0.96	27.40	27.07	13200	0.20
13400	0.96	30.01	30.43	13400	0.20
13600	0.96	32.41	35.45	13600	0.20
13800	0.97	32.67	39.36	13800	0.20
14000	0.98	30.24	33.97	14000	0.20
15000	1.08	21.08	21.23	14200	0.20
15600	1.17	18.89	18.80	14400	0.20
15800	1.19	18.39	18.31	14600	0.20
16000	1.22	17.98	17.93	14800	0.20
16200	1.24	17.66	17.61	15000	0.21
17000	1.35	16.63	16.71	15400	0.21
17200	1.38	16.31	16.42	16000	0.21
17400	1.42	15.91	16.03	16400	0.21
17600	1.47	15.41	15.54	17000	0.22
17800	1.54	14.74	14.85	17800	0.23
18000	1.63	13.93	14.04	18000	0.23

Typical Performance Curves

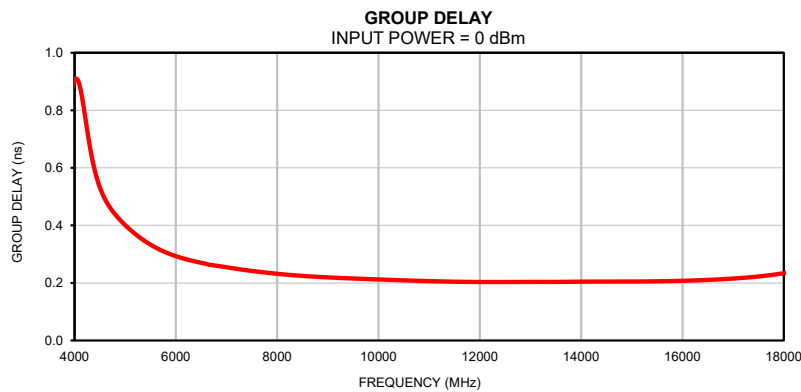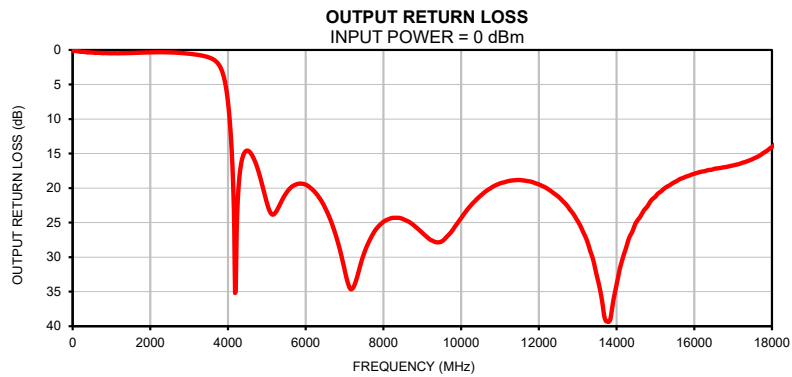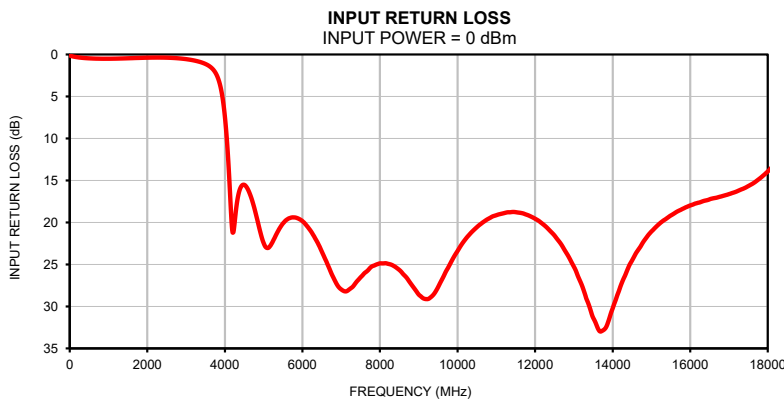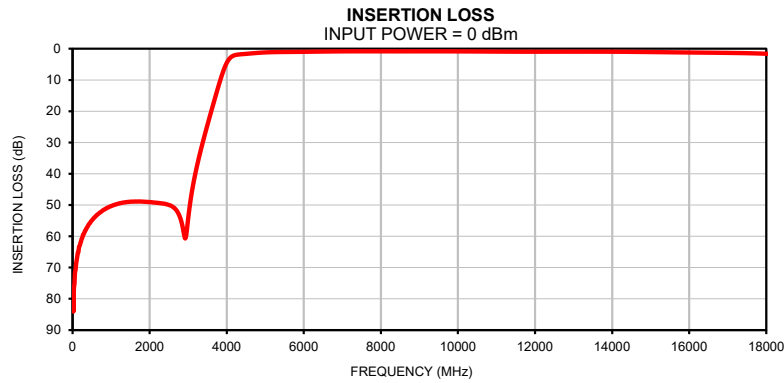

## Outline Dimensions

UK3042

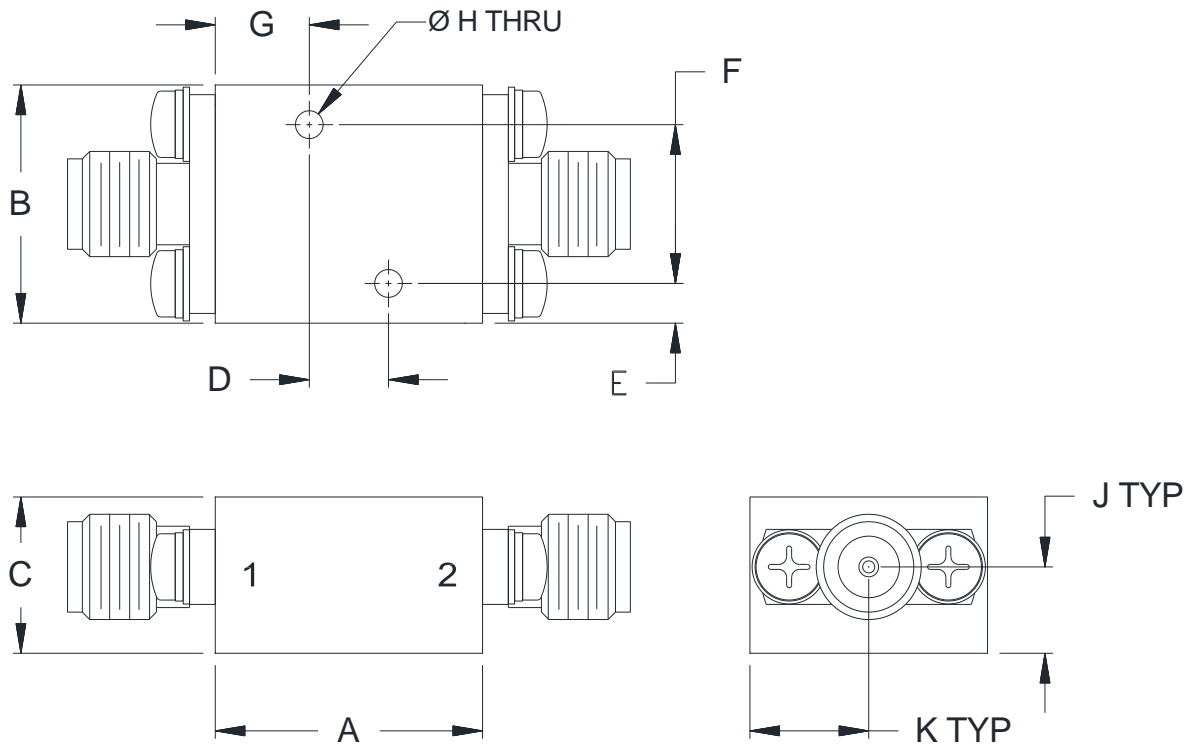

CASE#	A	B	C	D	E	F
UK3042	.68 (17.1)	.60 (15.2)	.39 (10.0)	.200 (5.08)	.10 (2.5)	.400 (10.16)

CASE#	G	H	J	K	WT.GRAMS
UK3042	.24 (6.0)	.070 (1.78)	.22 (5.5)	.30 (7.6)	24

Dimensions are in inches (mm). Tolerances: 2 Pl.  $\pm .050$ ; 3 Pl.  $\pm .015$

### Notes:

1. Case material: Brass alloy.
2. Case Finish:
  - a. Case & Cover of the units –Gold plating.
3. Refer to the individual model data sheet for the type of connectors available.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 125° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 125° C Ambient Environment	Individual Model Data Sheet