

ZK-MSP2TA-18

50 Ω DC to 18 GHz SPDT SMA-Female


THE BIG DEAL

- Mechanical SPDT absorptive switch
- TTL interface for simple control integration
- · Fail-safe/redundancy switching
- · LED switch state indicator
- High isolation
- Low insertion loss



Generic photo used for illustration purposes only

FUNCTIONAL BLOCK DIAGRAM



APPLICATIONS

- RF signal routing/switch matrices
- · Automated test & measurement systems
- 5G FR1, WiFi 6E, UWB, Bluetooth
- Military radio, radar & electronic warfare
- Harmonic testing

PRODUCT OVERVIEW

Mini-Circuits' ZK-MSP2TA-18 is an ultra-reliable electro-mechanical SPDT switch operating over a wide bandwidth from DC to 18 GHz with high isolation and low insertion loss. The switch is absorptive and fail-safe with a break before make configuration and lifetime of 5 million switching cycles when used within the noted specifications. All RF connections (SMA female) are conveniently grouped together on the front of the switch.

Simple control via TTL voltage levels allows integration with a wide range of microcontroller, embedded or custom systems without the additional complexity of USB or Ethernet control from a PC. The TTL control input and +24V DC supply connections are accessed through a single 3-pin PCB header connector on the rear of the switch. An LED indicator is also included on the rear of the package to give a convenient visual read out of the current switch state. An LED light-pipe connector allows the indicator to be routed to wherever it is needed when the switch is integrated into a final product.

KEY FEATURES

| Feature | Advantages |
|---------------------------------|---|
| Mechanical switch | Mechanical absorptive switches provide low loss, high isolation, high reliability, repeatable performance and internal termination of input signals on the disconnected paths |
| High repeatability | The high repeatability of switching cycles ensures reliable performance, critical for automated testing and other measurement applications. |
| Fail-safe design | The switch reverts to a known default state when the DC supply is removed, allowing their use in systems that must continue to operate safely in the event of power failure |
| Break-before-make configuration | Prevents a momentary connection of the old and new signal paths, reducing the inconsistent transient effects that could otherwise be observed during switching |
| TTL control | Simple control via TTL logic levels allows integration with a wide range of microcontroller, embedded, or custom systems. |

REV. A ECO-021312 ZK-MSP2TA-18 MCL NY





ZK-MSP2TA-18

50 Ω DC to 18 GHz SPDT SMA-Female

ELECTRICAL SPECIFICATIONS AT +25°C

| Parameter | Conditions | Min. | Тур. | Max. | Units |
|---|-----------------------------------|------|------|------|---------|
| Frequency Range | | DC | | 18 | GHz |
| | DC - 8 GHz | | 0.15 | 0.30 | |
| Insertion Loss | 8 – 12 GHz | | 0.25 | 0.40 | dB |
| | 12 – 18 GHz | | 0.30 | 0.50 | |
| | DC - 8 GHz | 75 | 90 | | |
| Isolation (Inactive Paths) ¹ | 8 – 12 GHz | 70 | 80 | | dB |
| | 12 – 18 GHz | 60 | 66 | | |
| | DC - 8 GHz | | 20 | | |
| Return Loss ² | 8 – 12 GHz | | 20 | | dB |
| | 12 – 18 GHz | | 19 | | |
| Switching Time | | | 25 | | ms |
| RF Input Power | DC-18 GHz | | | 20 | 147 |
| (Cold Switching) | Into internal termination | | | 1 | W |
| Contacts I Martine | 100 mW hot switching ³ | | 5 | | million |
| Switch Lifetime | 1W hot switching | | 1 | | cycles |

^{1.} Isolation measured between Com and the disconnected port. Example: Isolation for Com to 1 is the leakage measured at port 1 from a signal input when the active switch path is set to Com to 2.


^{2.} Return loss into all ports in all states.


^{3.} Hot switching power above this level will degrade the switch's lifetime.


ZK-MSP2TA-18

50 Ω DC to 18 GHz SPDT SMA-Female

TYPICAL PERFORMANCE CURVES

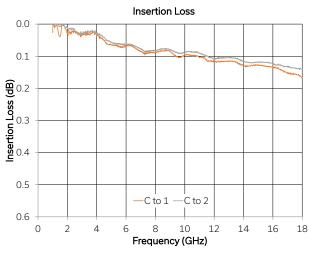

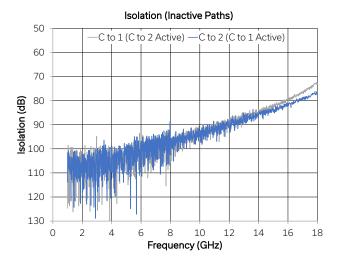

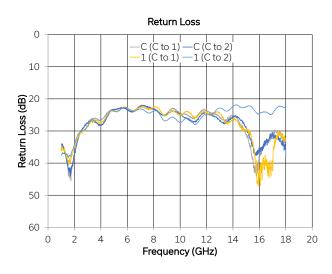



ZK-MSP2TA-18

 50Ω DC to 18 GHz SPDT SMA-Female

ABSOLUTE MAXIMUM RATINGS⁴


| Parameter | Conditions | Limits | Units | |
|-------------------------------|---------------------------|------------|-------|--|
| Temperature | Operating | 0 to +50 | °C | |
| remperature | Storage | -20 to +60 | C | |
| DC Voltage | Supply Voltage | +26 | V | |
| | Control Voltage | +5.5 | | |
| | Cold switching | 20 | | |
| RF Input Power (No Damage) | Hot switching | 1 | W | |
| | Into internal termination | 1 | | |

Permanent damage may occur if any of these limits are exceeded. Operating in the range between operating power limits and absolute maximum ratings for extended periods may result in reduced life and reliability.

DC ELECTRICAL SPECIFICATIONS

| Parameter | Conditions | Тур | Units |
|----------------|------------------------|-----|-------|
| Supply Voltage | | 24 | V |
| Current | All ports disconnected | 20 | mA |
| Consumption | Any port active | 220 | IIIA |

FUNCTIONAL BLOCK DIAGRAM

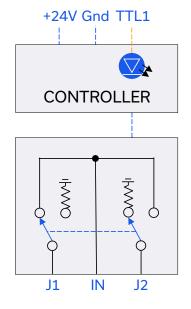

CONNECTIONS

| Port | Connector |
|------------------------|---------------------------------------|
| IN, J1-J2 ⁵ | SMA female |
| DC & Control | Molex 53398-0371 (3-pin) ⁶ |
| LED | Bivar SMFLP series ⁷ |

- 5. IN = RF common port; J1-J2 = RF input / output ports
- 6. Mating connector is Molex 51021-0300
- 7. Compatible with Bivar SMFLP light pipe system (1mm diameter optical fiber)

ZK-MSP2TA-18

 50Ω DC to 18 GHz SPDT SMA-Female

CONTROL

ZK-MSP2TA-18 requires a single +24V DC voltage supply and ground connection, with 1 control input using TTL logic levels.

Connect the included control cable assembly to the 3-pin header on the rear of ZK-MSP2TA-18. The other end of the cable assembly has exposed "pig-tail" wires which should be connected to the +24V DC supply and a 1-bit TTL control source.

The default switch state is in to J1, with J2 internally terminated. The switch is always in this state when the control input is at logic 0, or when no +24V DC supply is present.


Please contact testsolutions@minicircuits.com for support

SWITCH STATE TABLE

| TTL Input | Switch State | LED Color |
|-----------|--------------|-----------|
| Low | In to J1 | Green |
| High | In to J2 | Orange |

CONTROL HARNESS (B66-0001-12)

| 3-Pin Connector Pin | 3-Pin Connector Pin Bare Wire Color | |
|---------------------|-------------------------------------|-----------------|
| 1 | Red | TTL |
| 2 | Brown | Ground |
| 3 | White | +24 V DC Supply |

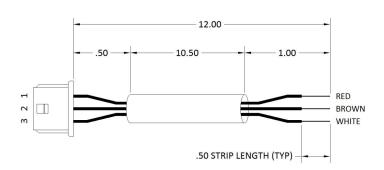





ZK-MSP2TA-18

DC to 18 GHz SPDT 50 Ω **SMA-Female**

CASE STYLE DRAWING

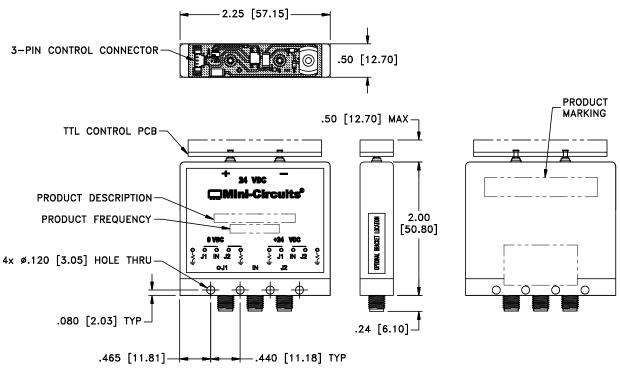

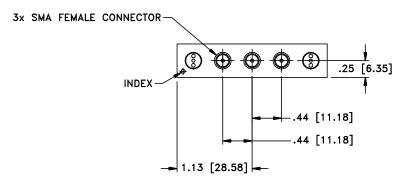

Weight: 95 grams.

Dimensions are in inches [mm]. Tolerances: 2 Pl. ±.03; 3 Pl. ±.015.

PRODUCT MARKING*

Product Marking: ZK-MSP2TA-18

Product Description: MSP2TA-18XL+ Absorptive switch

Product Frequency: DC – 18 GHz
*Marking may contain other features or characters for internal lot control



ZK-MSP2TA-18

50 Ω DC to 18 GHz SPDT SMA-Female

DETAILED MODEL INFORMATION IS AVAILABLE ON OUR WEBSITE CLICK HERE

| Case Style | FP2963 |
|-----------------------|----------------|
| Environmental Rating | ENV55 |
| Regulatory Compliance | RoHS Compliant |

Contact Us: testsolutions@minicircuits.com

| Included Accessories | Part Number | Description |
|----------------------------|-------------|---|
| 12.00 1.00 RED BROWN WHITE | B66-0002-18 | Control cable assembly (12" length) – 3-pin header connector (Molex 51021-0300) to 3 x bare wires (each 28 AWG) |

NOTES


- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp








Outline Dimensions

FP2963

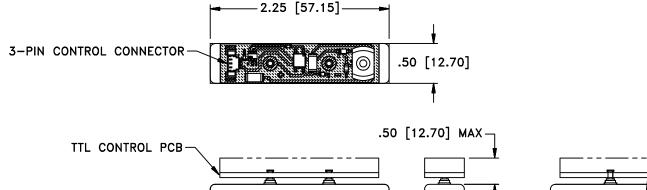

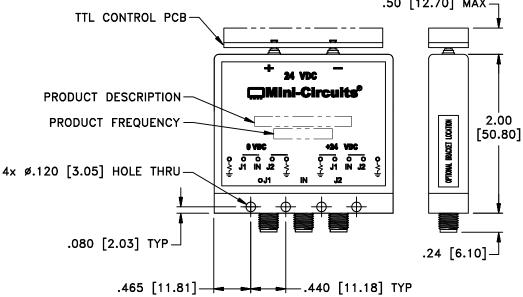

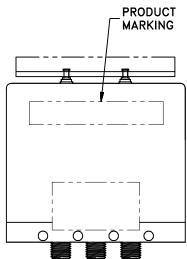

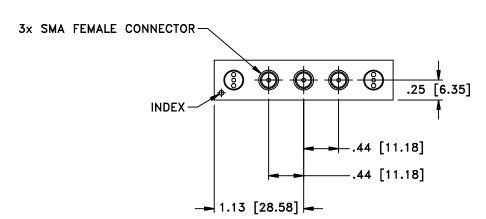

- 1. Case material: Copper-nickel alloy.
- 2. Dimensions are in inches (mm). Tolerances: 2 Pl. \pm .03; 3 Pl. \pm .015.
- 3. Weight: 95 grams.
- 4. Marking may contain other features or characters for internal lot control





P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site

The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS



Environmental Specifications

ENV55

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

| Specification | Test/Inspection Condition | Reference/Spec |
|--------------------------------|--------------------------------------|-----------------------------|
| Operating Temperature | -0° to 50° C Ambient Environment | Individual Model Data Sheet |
| Storage Temperature | -20° to 60° C Ambient Environment | Individual Model Data Sheet |
| Operating and Storage Humidity | 5% to 85% RH (non-condensing) | Ambient |
| Bench Handling Test | Bench Top Tip 45° & Drop | MIL-PRF-28800F |
| Transit Drop Test | Free Fall Drop, 20 cm (7.9 inches) | MIL-PRF-28800F Class 3 |
| | | |
| | | |
| | | |
| | | |
| | | |

This document and its contents are the property of Mini-Circuits