


Coaxial

Power Splitter/Combiner

ZMSCQ-2-120+

2 Way-90° 50Ω 80 to 120 MHz



Generic photo used for illustration purposes only

CASE STYLE: M21

Connectors Model

SMA ZMSCQ-2-120+

BRACKET (OPTION "B")

BRACKET (OPTION "BR")

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.125W max.
Permanent damage may occur if any of these limits are exceeded.	

Coaxial Connections

SUM PORT	2
PORT 1 (0°)	1
PORT 2 (+90°)	3

Features

- low insertion loss, 0.3 dB typ.
- high isolation, 21 dB typ.
- rugged shielded case


Applications

- VHF
- test set-ups

Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) Avg. of Coupled Outputs ABOVE 3 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)
	Typ.	Min.	Typ.	Max.	Max.	Max.
f _L -f _U						
80-120	21	18	0.3	0.7	3.0	1.5

Outline Drawing

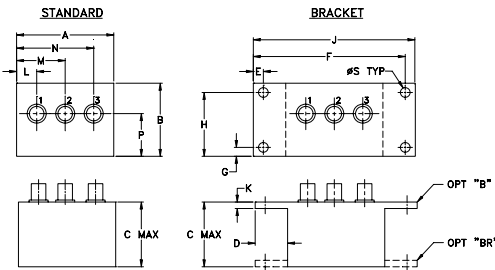

Outline Dimensions (inch/mm)




A	B	C	D	E	F	G	H
1.50	1.13	1.00	.50	.155	2.345	.138	.987
38.10	28.70	25.40	12.70	3.94	59.56	3.51	25.07

J	K	L	M	N	P	S	wt
2.50	.10	.31	.75	1.19	.66	.150	grams
63.50	2.54	7.87	19.05	30.23	16.76	3.81	40.0


Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
80.00	2.85	3.50	0.65	24.28	88.27	1.16	1.17	1.19
82.00	2.92	3.43	0.52	24.08	88.25	1.16	1.17	1.20
84.00	2.98	3.37	0.39	23.90	88.22	1.17	1.17	1.20
86.00	3.04	3.31	0.27	23.71	88.19	1.17	1.17	1.21
90.00	3.16	3.21	0.05	23.34	88.15	1.18	1.17	1.22
94.00	3.27	3.13	0.14	22.96	88.09	1.19	1.17	1.24
96.00	3.31	3.09	0.23	22.76	88.08	1.19	1.17	1.25
100.00	3.40	3.03	0.37	22.38	88.04	1.20	1.17	1.27
104.00	3.48	2.99	0.49	21.97	88.02	1.22	1.17	1.28
108.00	3.54	2.96	0.58	21.55	88.01	1.23	1.18	1.31
110.00	3.57	2.96	0.62	21.33	88.01	1.24	1.18	1.32
114.00	3.62	2.96	0.66	20.89	88.03	1.26	1.18	1.34
116.00	3.64	2.96	0.68	20.66	88.04	1.27	1.18	1.35
118.00	3.65	2.97	0.68	20.43	88.05	1.28	1.18	1.37
120.00	3.66	2.98	0.68	20.20	88.07	1.29	1.19	1.38

1. Total Loss = Insertion Loss + 3dB splitter loss.

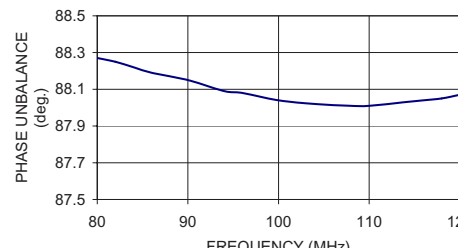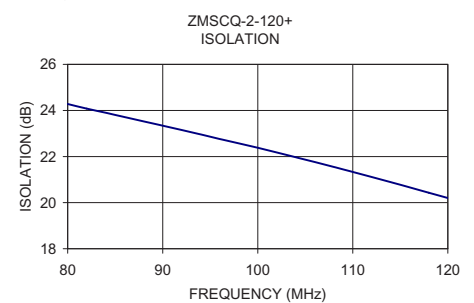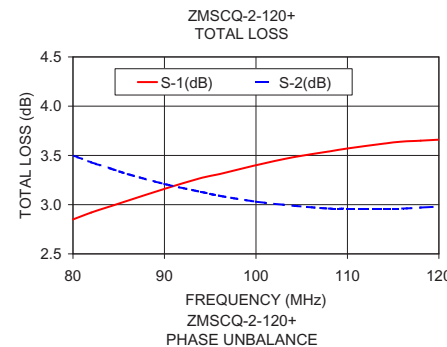

electrical schematic



Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/WCLStore/terms.jsp



2 Way-90° Power Splitter/Combiner

ZMSCQ-2-120+

Typical Performance Data

FREQ. (MHz)	TOTAL LOSS ¹ (dB)			AMP. UNBAL. (dB)	ISOLATION (dB)	PHASE UNBAL. (deg.)	FREQ. (MHz)	VSWR (:1)		
	S-1	S-2	AVG.					S	1	2
80.0	2.76	3.65	3.21	0.89	21.51	88.07	80.0	1.19	1.22	1.18
81.0	2.78	3.61	3.20	0.83	21.46	88.07	81.0	1.19	1.22	1.18
82.0	2.82	3.57	3.20	0.75	21.42	88.06	82.0	1.19	1.22	1.18
83.0	2.85	3.53	3.19	0.68	21.37	88.03	83.0	1.19	1.22	1.18
84.0	2.88	3.50	3.19	0.63	21.31	88.01	84.0	1.19	1.22	1.18
85.0	2.91	3.46	3.19	0.55	21.27	88.04	85.0	1.19	1.22	1.18
86.0	2.94	3.43	3.19	0.49	21.22	88.03	86.0	1.19	1.22	1.18
87.0	2.97	3.39	3.18	0.43	21.18	88.03	87.0	1.19	1.22	1.18
88.0	3.00	3.37	3.19	0.37	21.13	88.01	88.0	1.19	1.22	1.19
89.0	3.03	3.34	3.19	0.31	21.08	88.04	89.0	1.19	1.22	1.19
90.0	3.05	3.31	3.18	0.26	21.03	88.02	90.0	1.19	1.22	1.19
91.0	3.08	3.28	3.18	0.19	20.98	87.99	91.0	1.19	1.22	1.19
92.0	3.11	3.25	3.18	0.15	20.93	88.05	92.0	1.19	1.22	1.19
93.0	3.13	3.22	3.18	0.09	20.88	88.06	93.0	1.19	1.22	1.19
94.0	3.16	3.20	3.18	0.04	20.83	88.03	94.0	1.19	1.21	1.19
95.0	3.18	3.17	3.18	0.01	20.78	88.04	95.0	1.19	1.21	1.20
96.0	3.21	3.15	3.18	0.06	20.72	88.05	96.0	1.19	1.21	1.20
97.0	3.23	3.13	3.18	0.10	20.67	88.02	97.0	1.19	1.21	1.20
98.0	3.25	3.11	3.18	0.15	20.62	88.05	98.0	1.19	1.21	1.20
99.0	3.28	3.09	3.19	0.19	20.57	88.04	99.0	1.19	1.21	1.20
100.0	3.30	3.07	3.19	0.24	20.51	88.07	100.0	1.19	1.21	1.21
101.0	3.32	3.05	3.19	0.27	20.46	88.08	101.0	1.20	1.21	1.21
102.0	3.35	3.03	3.19	0.32	20.41	88.06	102.0	1.20	1.21	1.21
103.0	3.37	3.02	3.20	0.35	20.36	88.11	103.0	1.20	1.21	1.21
104.0	3.38	2.99	3.19	0.39	20.30	88.07	104.0	1.20	1.21	1.22
105.0	3.40	2.98	3.19	0.42	20.24	88.06	105.0	1.20	1.21	1.22
106.0	3.42	2.96	3.19	0.46	20.18	88.10	106.0	1.20	1.21	1.22
107.0	3.44	2.95	3.20	0.49	20.13	88.11	107.0	1.20	1.21	1.22
108.0	3.45	2.94	3.20	0.51	20.07	88.15	108.0	1.20	1.21	1.23
109.0	3.47	2.93	3.20	0.55	20.00	88.14	109.0	1.20	1.21	1.23
110.0	3.49	2.91	3.20	0.57	19.95	88.14	110.0	1.21	1.21	1.23
111.0	3.50	2.90	3.20	0.59	19.88	88.11	111.0	1.21	1.22	1.23
112.0	3.51	2.89	3.20	0.62	19.82	88.16	112.0	1.21	1.22	1.24
113.0	3.53	2.89	3.21	0.64	19.77	88.17	113.0	1.21	1.22	1.24
114.0	3.54	2.88	3.21	0.66	19.69	88.19	114.0	1.21	1.22	1.24
115.0	3.55	2.87	3.21	0.68	19.63	88.18	115.0	1.21	1.22	1.25
116.0	3.57	2.87	3.22	0.70	19.57	88.18	116.0	1.22	1.22	1.25
117.0	3.58	2.87	3.23	0.71	19.50	88.21	117.0	1.22	1.22	1.25
118.0	3.59	2.87	3.23	0.72	19.44	88.22	118.0	1.22	1.22	1.26
119.0	3.60	2.87	3.24	0.73	19.37	88.28	119.0	1.22	1.22	1.26
120.0	3.61	2.86	3.24	0.75	19.30	88.27	120.0	1.23	1.22	1.26






¹ Total Loss = Insertion Loss+ 3dB Splitter Loss




2 Way-90° Power Splitter/Combiner

ZMSCQ-2-120+

Typical Performance Curves

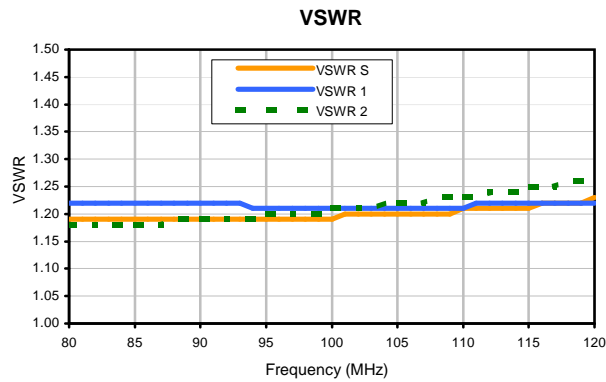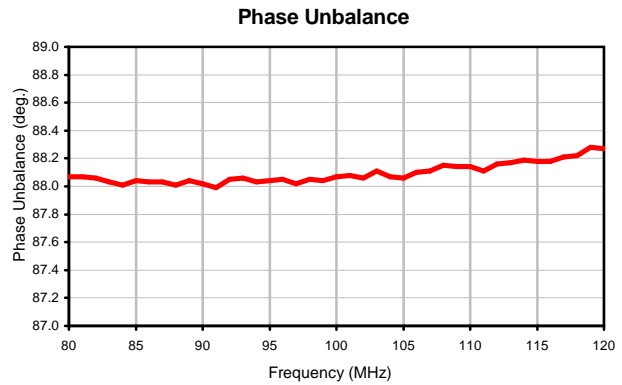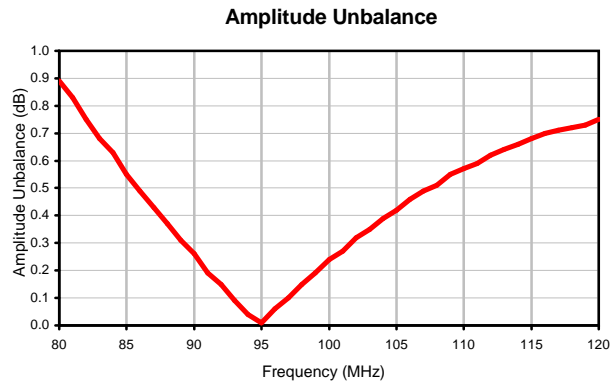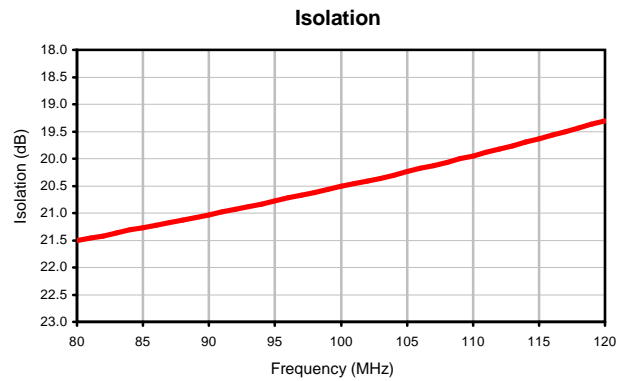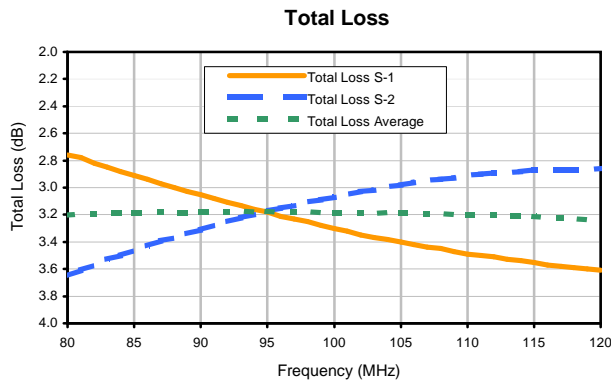

Outline Dimensions

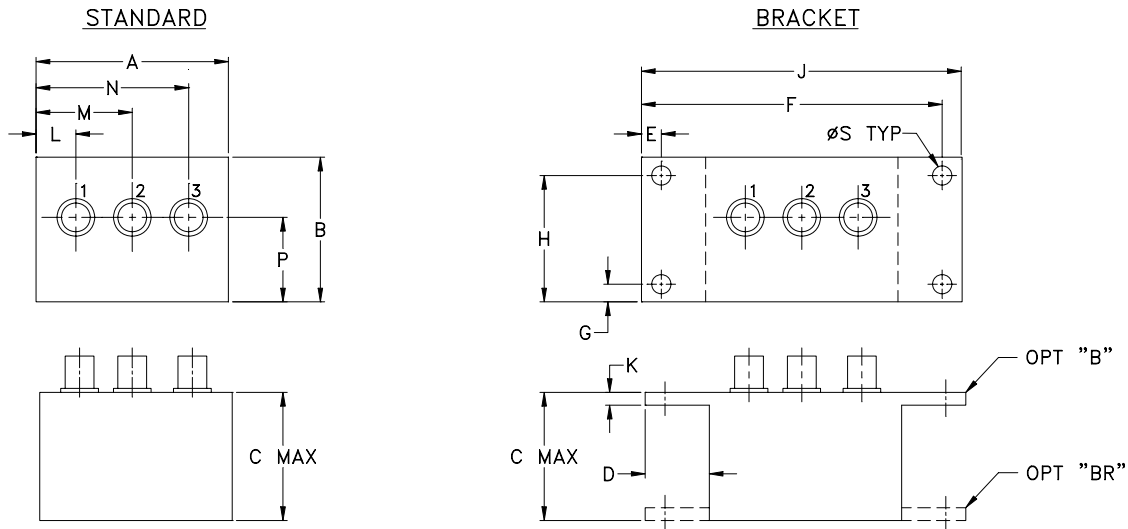

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N
M21	1.50 (38.10)	1.13 (28.70)	1.00 (25.40)	.50 (12.70)	.155 (3.94)	2.345 (59.56)	.138 (3.51)	.987 (25.07)	2.50 (63.50)	.10 (2.54)	.31 (7.87)	.75 (19.05)	1.19 (30.23)
M22	2.25 (57.15)	1.38 (35.05)	1.24 (31.50)		.150 (3.81)	3.100 (78.74)		1.238 (31.45)	3.25 (82.55)		.40 (10.16)	1.15 (29.21)	1.86 (47.24)
M23	2.25 (57.15)	1.38 (35.05)	1.24 (31.50)		.150 (3.81)	3.100 (78.74)		1.238 (31.45)	3.25 (82.55)		.63 (16.00)	1.06 (26.92)	1.63 (41.40)

CASE#	P	Q	R	S	WT. GRAMS
M21	.66 (16.76)	--	--	.150 (3.81)	40.0
M22	.64 (16.26)	--	--		74.0
M23	.69 (17.53)	--	--		70.0

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

Notes:

- Case material: Aluminum alloy.
- Case finish:
 - For RoHS Case Styles: Clear chemical conversion coating, non-chrome or trivalent chrome based.
 - For Non-RoHS Case Styles: Yellow hexavalent chrome based conversion coating.

Due to transition from non-RoHS to RoHS, models will be supplied with either case style finish until the non-RoHS case inventory is depleted.
- Mounting bracket available on request. For bracket mounted on connector end add suffix B to part number and add \$5.00 to unit cost. For bracket mounted on the rear, add suffix BR to part number and add \$1.50 to unit cost.



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I