

Power Splitter/Combiner

2 Way-0° 50Ω 750 to 2000 MHz

ZN2PD-20-S+



Generic photo used for illustration purposes only

CASE STYLE: VVV180

Connectors	Model
SMA	ZN2PD-20-S+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	5W max.
Internal Dissipation	0.725W max.
DC Current	800 mA (400mA for each port)
Permanent damage may occur if any of these limits are exceeded.	

Coaxial Connections

SUM PORT	S
PORT 1	1
PORT 2	2

Outline Drawing

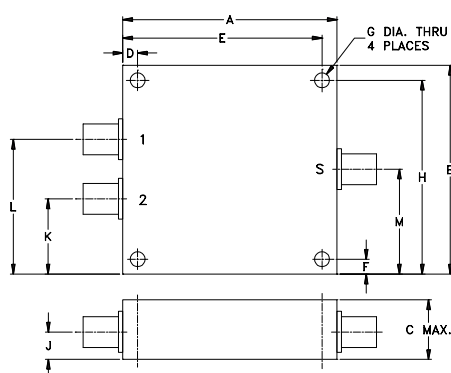

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
1.80	1.75	.66	.125	1.675	.125	.125
45.72	44.45	16.76	3.18	42.55	3.18	3.18

H	J	K	L	M	wt
1.625	.31	.63	1.13	.88	grams
41.28	7.87	16.00	28.70	22.35	65.2

Features

- wideband, 750 to 2000 MHz
- low insertion loss, 0.2 dB typ.
- good isolation, 23 dB typ.
- very good input VSWR, 1.18:1 typ.
- excellent output VSWR, 1.07:1 typ.
- up to 5W power input

Applications

- VSAT
- communications systems
- instrumentations

Electrical Specifications




FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 3.0 dB	PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)	VSWR (:1)				
	L		M		U					S		OUT		
	Typ.	Min.	Typ.	Min.	Typ.	Min.				Typ.	Max.	Typ.	Max.	Typ.
f _L -f _U	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Max.	Max.	Typ.	Max.	Typ.	Max.
750-2000	18	15	25	20	18	15	0.2	0.5	4	0.3	1.16	1.5	1.10	1.35

L = 750-875 MHz M = 875-1850 MHz U = 1850-2000 MHz


Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
750.0	3.21	3.19	0.02	17.43	0.23	1.36	1.09	1.09
770.0	3.21	3.18	0.03	18.06	0.30	1.34	1.09	1.10
790.0	3.21	3.18	0.03	18.72	0.29	1.33	1.10	1.10
815.0	3.20	3.18	0.02	19.50	0.31	1.31	1.11	1.11
860.0	3.18	3.16	0.02	21.11	0.36	1.28	1.12	1.12
900.0	3.20	3.16	0.04	22.69	0.39	1.26	1.13	1.13
937.5	3.19	3.16	0.02	24.50	0.45	1.24	1.13	1.14
975.0	3.18	3.17	0.01	26.32	0.40	1.23	1.14	1.14
1170.0	3.18	3.16	0.02	28.42	0.42	1.21	1.12	1.13
1510.0	3.20	3.18	0.02	24.03	0.57	1.19	1.05	1.04
1850.0	3.19	3.14	0.05	22.86	0.51	1.04	1.09	1.08
1895.0	3.21	3.14	0.06	21.54	0.53	1.06	1.10	1.09
1940.0	3.20	3.15	0.06	20.18	0.51	1.09	1.10	1.09
1970.0	3.22	3.16	0.06	19.30	0.54	1.12	1.10	1.09
2000.0	3.22	3.16	0.06	18.38	0.54	1.15	1.10	1.09

1. Total Loss = Insertion Loss + 3dB splitter loss.

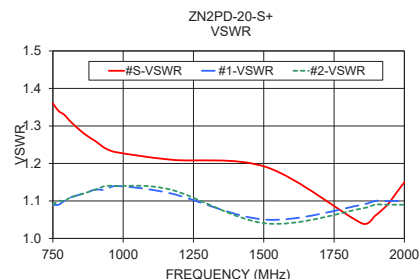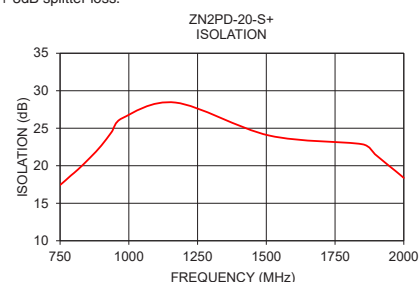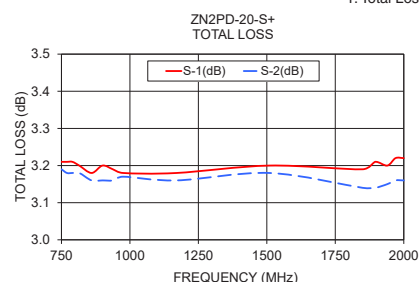

electrical schematic

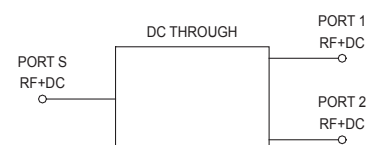

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



2 Way-0° Power Splitter/Combiner

ZN2PD-20+

Typical Performance Data

FREQ. (MHz)	TOTAL LOSS ¹ (dB)		AMP. UNBAL. (dB)	ISOLATION (dB)	PHASE UNBAL. (deg.)	FREQ. (MHz)	VSWR (:1)		
	S-1	S-2					S	1	2
750.0	3.23	3.22	0.01	17.70	0.01	750.0	1.37	1.09	1.08
760.0	3.12	3.11	0.00	17.95	0.01	760.0	1.36	1.09	1.08
770.0	3.08	3.07	0.01	18.24	0.08	770.0	1.35	1.09	1.08
780.0	3.14	3.13	0.01	18.56	0.05	780.0	1.34	1.09	1.08
790.0	3.21	3.20	0.01	18.90	0.12	790.0	1.33	1.10	1.09
800.0	3.26	3.25	0.01	19.26	0.12	800.0	1.33	1.10	1.09
815.0	3.24	3.24	0.00	19.76	0.14	815.0	1.31	1.10	1.09
830.0	3.27	3.27	0.00	20.32	0.09	830.0	1.30	1.11	1.10
845.0	3.21	3.20	0.01	20.89	0.03	845.0	1.29	1.11	1.10
860.0	3.07	3.06	0.01	21.37	0.02	860.0	1.28	1.11	1.10
875.0	3.12	3.09	0.03	21.98	0.09	875.0	1.27	1.12	1.10
887.5	3.22	3.19	0.03	22.61	0.12	887.5	1.26	1.12	1.11
900.0	3.23	3.22	0.01	23.15	0.02	900.0	1.26	1.12	1.11
912.5	3.20	3.20	0.01	23.66	0.05	912.5	1.25	1.12	1.11
925.0	3.22	3.20	0.02	24.29	0.13	925.0	1.24	1.12	1.11
937.5	3.20	3.18	0.02	24.86	0.04	937.5	1.23	1.12	1.11
950.0	3.16	3.15	0.01	25.46	0.06	950.0	1.23	1.12	1.11
962.5	3.10	3.09	0.01	25.98	0.05	962.5	1.22	1.12	1.11
975.0	3.14	3.13	0.01	26.62	0.09	975.0	1.22	1.12	1.11
987.5	3.18	3.15	0.03	27.29	0.03	987.5	1.21	1.12	1.11
1000.0	3.18	3.17	0.01	27.83	0.09	1000.0	1.21	1.12	1.11
1085.0	3.16	3.14	0.02	29.62	0.10	1085.0	1.19	1.12	1.10
1170.0	3.21	3.19	0.02	27.51	0.05	1170.0	1.18	1.10	1.09
1255.0	3.22	3.21	0.01	25.23	0.13	1255.0	1.18	1.08	1.07
1340.0	3.18	3.17	0.01	23.92	0.17	1340.0	1.19	1.06	1.06
1425.0	3.16	3.13	0.03	23.29	0.22	1425.0	1.18	1.04	1.05
1510.0	3.19	3.18	0.01	23.31	0.20	1510.0	1.17	1.04	1.06
1595.0	3.17	3.16	0.01	23.69	0.10	1595.0	1.15	1.06	1.07
1680.0	3.15	3.13	0.01	23.95	0.16	1680.0	1.11	1.08	1.09
1765.0	3.16	3.15	0.01	23.43	0.29	1765.0	1.07	1.10	1.11
1850.0	3.16	3.14	0.02	21.74	0.20	1850.0	1.05	1.11	1.11
1865.0	3.21	3.18	0.02	21.38	0.18	1865.0	1.05	1.11	1.11
1880.0	3.17	3.15	0.02	21.02	0.26	1880.0	1.06	1.11	1.11
1895.0	3.20	3.21	0.01	20.63	0.25	1895.0	1.06	1.11	1.11
1910.0	3.22	3.21	0.01	20.23	0.19	1910.0	1.07	1.11	1.11
1925.0	3.20	3.19	0.01	19.78	0.28	1925.0	1.08	1.11	1.11
1940.0	3.18	3.17	0.01	19.32	0.23	1940.0	1.10	1.11	1.11
1955.0	3.22	3.22	0.00	18.93	0.27	1955.0	1.11	1.11	1.11
1970.0	3.21	3.21	0.00	18.54	0.20	1970.0	1.12	1.11	1.11
1985.0	3.18	3.17	0.01	18.18	0.24	1985.0	1.14	1.11	1.11
2000.0	3.21	3.20	0.01	17.80	0.24	2000.0	1.15	1.10	1.11






¹ Total Loss = Insertion Loss+ 3dB Splitter Loss

REV. X2
ZN2PD-20+
100627
Page 1 of 1

2 Way-0° Power Splitter/Combiner

ZN2PD-20+


Typical Performance Curves

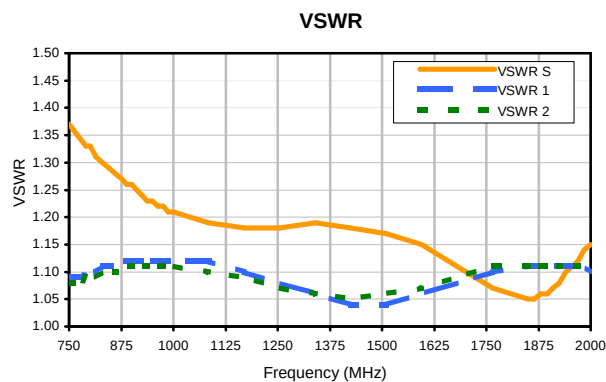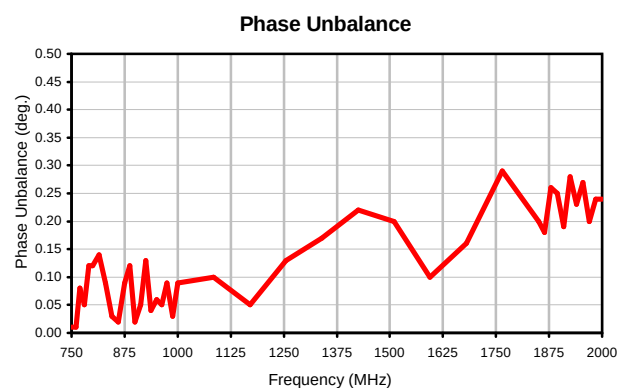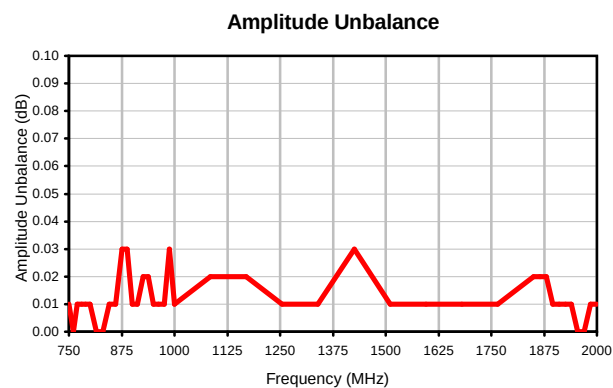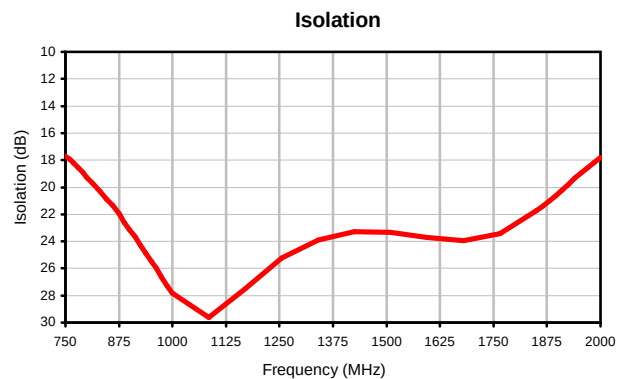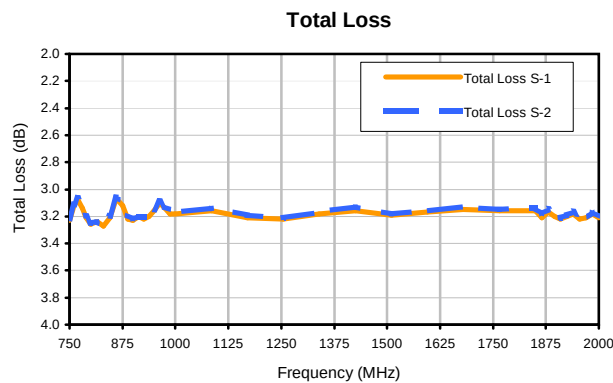

REV. X2
ZN2PD-20+
100627
Page 1 of 1

Outline Dimensions

VVV180

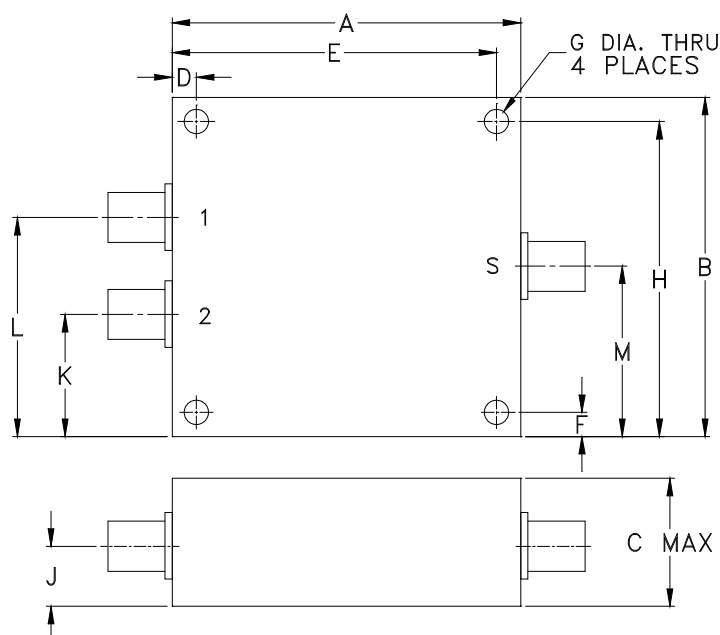

CASE#	A	B	C	D	E	F	G	H	J	K	L
VVV180	1.80 (45.72)	1.75 (44.45)	.66 (16.76)	.125 (3.18)	1.675 (42.55)	.125 (3.18)	.125 (3.18)	1.625 (41.28)	.31 (7.87)	.63 (16.00)	1.13 (28.70)

CASE#	M	WT.GRAMS
VVV180	.88 (22.35)	65.2

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

Notes:

1. Case material: Aluminum alloy.
2. Case finish:
For RoHS Case Styles: Clear chemical conversion coating, non-chrome or trivalent chrome based.
3. Refer to the individual model data sheet for the type of connectors available.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



Provides ACTUAL Data Instantly From Mini-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I