


Splitter / Combiner Panel

ZT-256

 50Ω DC to 18 GHz 12×2 -Way SMA Female

THE BIG DEAL

- · Rack-mounted RF splitter / combiner panel
- 12 x 2-way resistive splitters in 2U rack space
- All connectors on the front panel
- Wide band



Front View



Rear View
Generic photo used for illustration purposes only

APPLICATIONS

- Production test setups
- Satcom signal distribution
- Quantum computing
- · 5G FR1, Bluetooth & WiFi signal distribution

FUNCTIONAL BLOCK DIAGRAM



PRODUCT OVERVIEW

Mini-Circuits panel-mounted structures provide clean, organized management of cable runs and connections in complex, high volume test setups. Multiple connector adapters, power splitters, directional couplers and other essential RF components and test accessories can be integrated efficiently within the test system. Custom configurations are available upon request.

ZT-256 integrates 12 x 2-way splitter / combiners on to a compact panel requiring only 2U of rack space. The wideband resistive design of the splitters achieves close to the ideal 6 dB insertion loss and isolation across the full bandwidth from DC-18 GHz.

The panel is configured with all SMA RF connectors on the front for easy access within a rack-mounted test environment.

ELECTRICAL SPECIFICATIONS AT +25°C (EACH SPLITTER)

| Parameter | Conditions | Min | Тур | Max | Units |
|----------------|---------------|-----|-----|-----|-------|
| Frequency | | DC | | 18 | GHz |
| | DC - 6 GHz | | 6.5 | 7.3 | |
| Insertion Loss | 6 – 12 GHz | | 7.1 | 8.0 | dB |
| | 12 - 18 GHz | | 8.0 | 8.7 | |
| | DC - 6 GHz | 5.0 | 6.2 | | |
| Isolation | 6 – 12 GHz | 5.5 | 6.5 | | dB |
| | 12 – 18 GHz | 6.0 | 7.0 | | |
| | DC - 6 GHz | | 25 | | |
| Return Loss | 6 – 12 GHz | | 20 | | dB |
| | 12 – 18 GHz | | 12 | | |
| Input Power | As a splitter | | | +20 | dBm |

REV. A ECO-022135 ZTM-256 MCL NY






RACK-MOUNTED


Splitter / Combiner Panel


ZT-256

 50Ω DC to 18 GHz 12×2 -Way SMA Female

TYPICAL PERFORMANCE GRAPHS

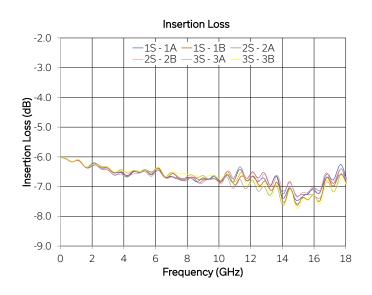

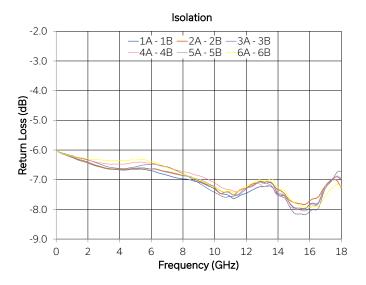

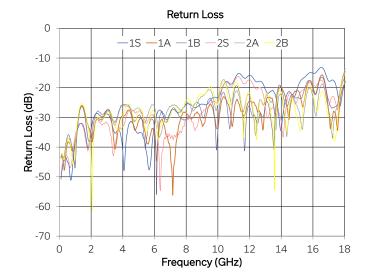



RACK-MOUNTED

Splitter / Combiner Panel

ZT-256

 50Ω DC to 18 GHz 12×2 -Way SMA Female

ABSOLUTE MAXIMUM RATINGS


| Parameter | Conditions | Limits | Units |
|-------------|-------------------|------------|-------|
| Temperature | Operating 0 to +5 | | °C |
| | Storage | -20 to +60 | |

Permanent damage may occur if any of these limits are exceeded. Operating in the range between operating power limits and absolute maximum ratings for extended periods of time may result in reduced life and reliability.

CONNECTIONS

| Port | Connector |
|-------------------------------|------------|
| Splitter 1-12, ports S, A & B | SMA female |

CASE STYLE DRAWING

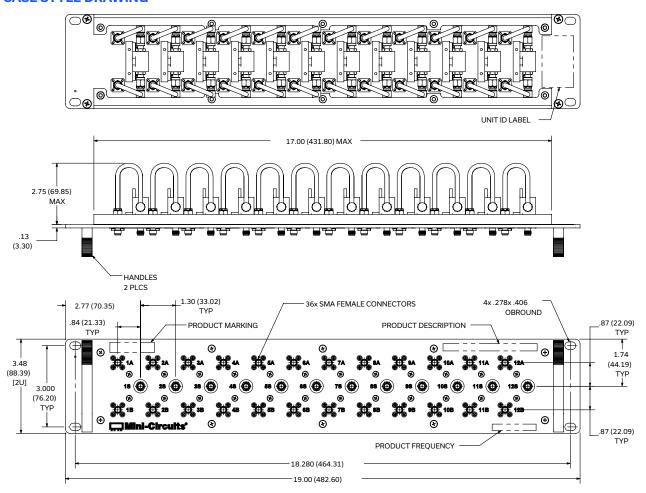

Weight: 1240 grams.

Dimensions are in inches (mm). Tolerances: 2 Pl.±.03 inch; 3 Pl.±.015 inch.

PRODUCT MARKING*

Product Marking: ZT-256

Product Description: 12 x 2-Way Resistive Splitter Panel

Product Frequency: DC to 18 GHz

Unit ID Label: Serial number and other identification marks

*Marking may contain other features or characters for internal lot control



Splitter / Combiner Panel

ZT-256

 50Ω DC to 18 GHz 12×2 -Way SMA Female

DETAILED MODEL INFORMATION IS AVAILABLE ON OUR WEBSITE CLICK HERE

| Case Style | AAR2582 | |
|-----------------------|--|--|
| Environmental Rating | ENV55 | |
| Regulatory Compliance | Refer to our website for compliance methodologies and qualifications | www.minicircuits.com/quality/environmental_introduction.html |

Contact Us: testsolutions@minicircuits.com

| Included Accessories | Part Number | Description |
|----------------------|-------------|----------------------------------|
| | HT-4-SMA | SMA connector wrench (4" length) |


NOTES


- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html




Outline Dimensions

AAR2582

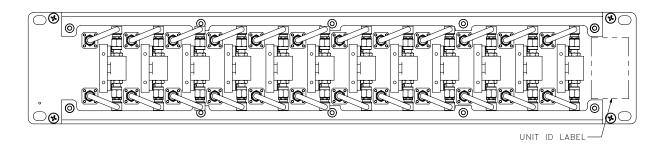

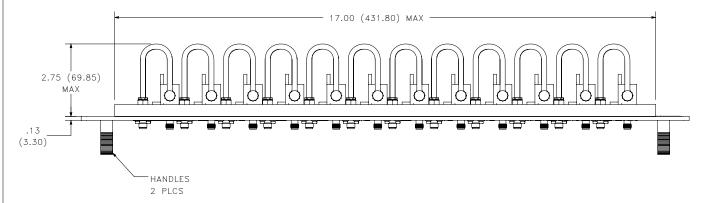

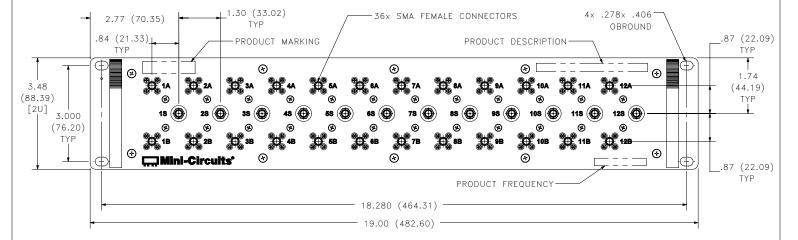

Notes:

- 1. Case material: Aluminum (with protective coating to prevent corrosion).
- 2. Dimensions are in inches (mm). Tolerances: 2 Pl. ±.03 inch; 3 Pl. ±.015 inch.
- 3. Weight: 1240 grams.
- 4. Marking may contain other features or characters for internal lot control.





P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site





Environmental Specifications

ENV55

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

| Specification | Test/Inspection Condition | Reference/Spec |
|--------------------------------------|--------------------------------------|-----------------------------|
| Operating Temperature | -0° to 50° C Ambient Environment | Individual Model Data Sheet |
| Storage Temperature | -20° to 60° C Ambient Environment | Individual Model Data Sheet |
| Operating and Storage Humidity | 5% to 85% RH (non-condensing) | Ambient |
| Bench Handling Test | Bench Top Tip 45° & Drop | MIL-PRF-28800F |
| Transit Drop Test | Free Fall Drop, 20 cm (7.9 inches) | MIL-PRF-28800F Class 3 |
| | | |
| | | |
| | | |
| | | |
| ENV55 Rev: A January 30, 2017 M16012 | 29 File: ENV/55 pdf | |

ENV55 Rev: A January 30, 2017 M160128 File: ENV55.pdf

This document and its contents are the property of Mini-Circuits