



SUPER ULTRA

# Wideband Amplifier

# ZVE-323LN-K+ ZVE-323LNX-K+


50Ω 18 to 32 GHz

## THE BIG DEAL

- Extremely wideband, 18 to 32 GHz
- Flat Gain, 20±1.5 dB typ.
- High OIP3, +23 dBm typ.
- +10 dBm Pout typ.

## APPLICATIONS

- Radar and military
- Test instrumentation
- Satellite repeaters
- Communication

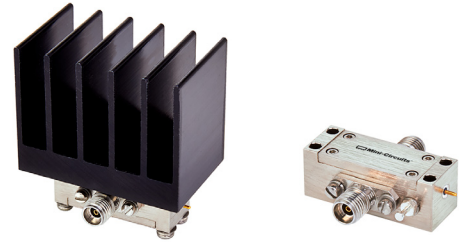

Generic photo used for illustration purposes only

<b>Model No.</b>	ZVE-323LN-K+	ZVE-323LNX-K+ ▲
<b>Option</b>	With heatsink	Without heatsink
<b>Case Style</b>	AV1280-1	
<b>Connectors</b>	2.92mm (K-Type)	

**+RoHS Compliant**  
*The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications*

## PRODUCT OVERVIEW

Mini-Circuits' ZVE-323LN-K+ is a Class-A, three-stage, unconditionally stable amplifier providing flat gain over an extremely wide frequency range from 18 to 32 GHz. This model is capable of delivering up to 10mW output power at P1dB with high output IP3 supporting a wide range of sensitive, high-dynamic range receiver applications and many systems where high performance over wideband is needed. It operates on a +12V supply and features built-in safety features including protection against reverse bias and immunity to accidental open or short loads for 2 minutes. The amplifier comes in a rugged, compact case (1.2 x0.46 x0.45") with K-type (2.92mm) connectors and an optional heat sink for efficient cooling.

## KEY FEATURES

Feature	Advantages
Ultra-wideband, 18 to 32 GHz able to work from 17 to 33 GHz	Enables a single amplifier to be used in a wide range of applications.
Excellent gain flatness, ±1.5 dB across full frequency range	Provides consistent performance across its operating frequency, minimizing the need for external equalizing networks in wideband applications.
High gain, 20 dB typ.	Reduces the number of gain stages, lowering component count and overall system cost.
Class A Amplifier	Provides good linearity with low signal distortion.
Low Noise and High OIP3: • NF, 3 dB typ. • OIP3, +23 dBm typ.	The combination of low noise and high OIP3 makes the ZVE-323LN-K+ ideal for use in low noise receiver front end (RFE) as it gives the user the advantages of sensitivity and two-tone IM performance at both ends of the dynamic range.
Rugged design	Built-in protection against reverse bias and accidental open and short loads provides added reliability for demanding operating conditions.





SUPER ULTRA

# Wideband Amplifier

# ZVE-323LN-K+ ZVE-323LNX-K+

## ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Condition (GHz)	ZVE-323LN-K+ ZVE-323LNX-K+▲			Units
		Min.	Typ.	Max.	
Frequency range		18		32	GHz
Gain	18-32	17	20	24	dB
Gain Flatness	18-32		±1.5	±2.5	dB
Output Power at 1dB compression	18-32		10		dBm
Noise Figure	18-32		3	4	dB
Output third order intercept point	18-32		23		dBm
Input VSWR	18-32		1.9	3.0	:1
Output VSWR	18-32		1.8	3.0	:1
DC Supply Voltage			12*		V
Supply Current			50	75	mA

\* Recommended operating voltage

▲ Heat sink not included. Alternative heat sinking and heat removal must be provided by the user to limit maximum base-plate temperature to 85°C, in order to ensure proper performance. For reference, this requires thermal resistance of user's external heat sink to be 20°C/W max.

## MAXIMUM RATINGS

Parameter	Ratings
Operating temperature	ZVE-323LN-K+ -40°C to 60°C ambient ZVE-323LNX-K+ -40°C to 85°C base plate temp.
Storage temperature	-65°C to 150°C
DC Voltage	14V
CW Input RF Power (no damage)	+15 dBm

Permanent damage may occur if any of these limits are exceeded.






SUPER ULTRA


# Wideband Amplifier

**ZVE-323LN-K+**  
**ZVE-323LNK-K+**

## OUTLINE DRAWING FOR MODELS WITH HEATSINK (ZVE-323LN-K+)

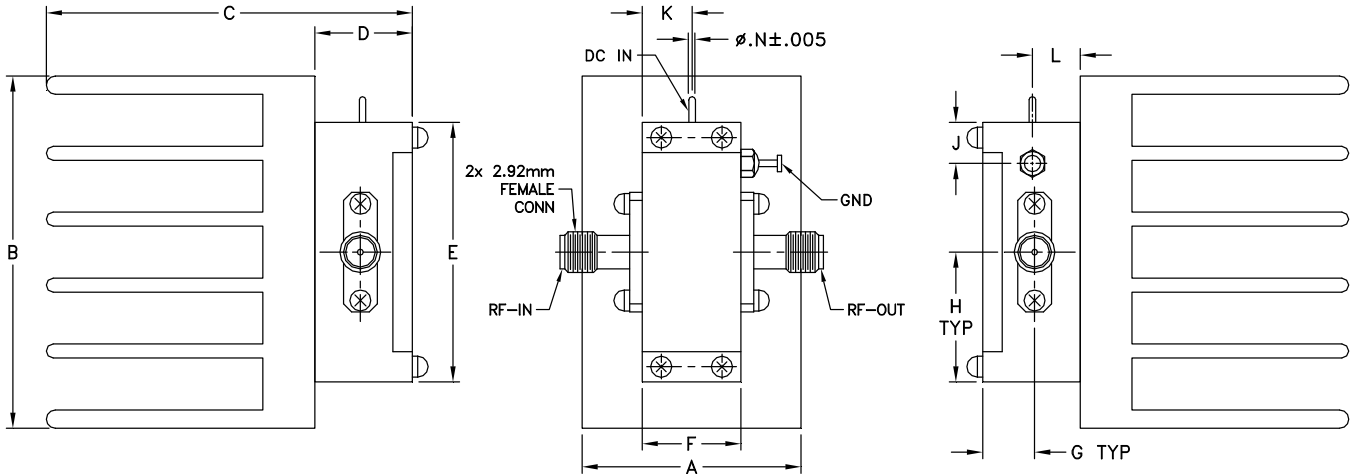

## MOUNTING INFORMATION FOR MODELS WITHOUT HEATSINK (ZVE-323LNK-K+)

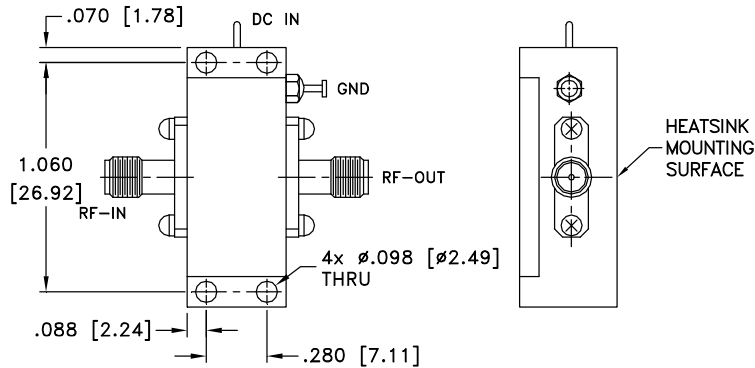

## OUTLINE DIMENSIONS (MM/INCH)

A	B	C	D	E	F	G	H	J	K	L	M	N	wt
1.01	1.63	1.74	.45	1.20	.46	.24	.60	.19	.23	.27	-	.03	grams*
25.65	41.40	44.20	11.43	30.48	11.68	6.10	15.24	4.83	5.84	6.86	-	0.76	58

\*17 grams without heatsink











SUPER ULTRA

# Wideband Amplifier

## ZVE-323LN-K+ ZVE-323LNX-K+

### TYPICAL PERFORMANCE DATA/CURVES

Frequency (MHz)	Gain (dB)	Directivity (dB)	VSWR (:1)		Pout at 1 dB Compr. (dBm)	Noise Figure (dB)	OIP3 (dBm)
	12V	12V	IN	OUT	12V	12V	12V
18000	23.05	24.97	1.48	1.44	10.60	2.65	20.09
18500	22.71	26.90	1.45	1.48	11.14	2.55	20.97
19000	22.38	27.57	1.44	1.51	11.45	2.33	21.41
19500	22.11	29.08	1.45	1.52	11.67	2.43	21.65
20000	21.89	27.59	1.46	1.52	12.12	2.64	22.29
20500	21.76	27.70	1.48	1.51	12.07	2.54	23.03
21000	21.64	27.00	1.48	1.51	12.33	2.33	23.60
21500	21.63	25.79	1.46	1.51	12.61	2.44	24.18
22000	21.69	24.94	1.44	1.54	12.34	2.59	24.16
22500	21.85	24.18	1.40	1.58	12.64	2.71	24.71
23000	22.07	23.13	1.37	1.65	13.10	2.66	24.38
24000	22.57	23.02	1.39	1.80	13.00	2.59	24.97
25000	22.75	24.15	1.46	1.84	12.74	2.55	25.83
26000	22.69	25.32	1.48	1.75	12.85	2.43	26.12
27000	22.57	26.17	1.45	1.60	12.72	2.54	25.61
28000	22.58	26.36	1.40	1.45	13.19	2.38	25.42
29000	22.57	24.92	1.31	1.33	13.14	2.57	25.55
30000	22.51	24.83	1.15	1.27	12.46	2.54	25.80
31000	22.26	25.45	1.10	1.25	14.04	2.50	25.88
32000	21.72	24.13	1.55	1.24	15.18	3.05	26.12

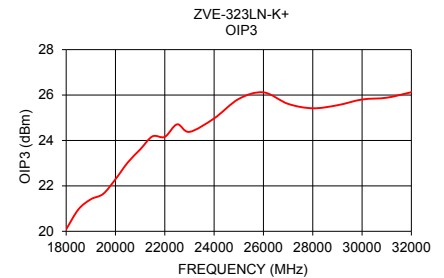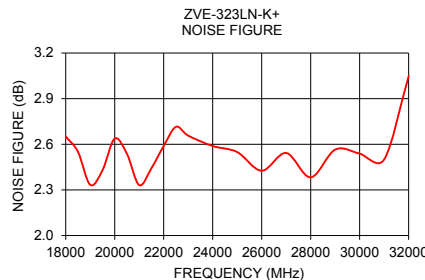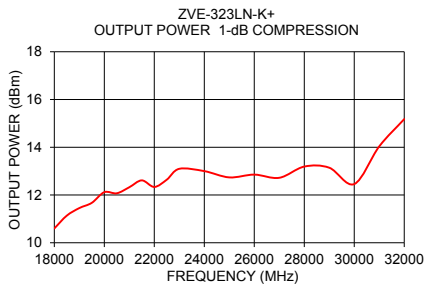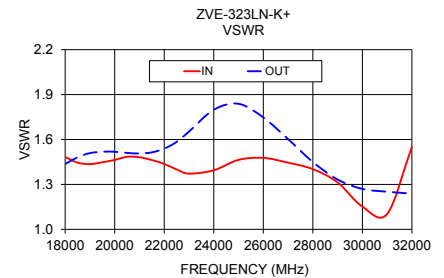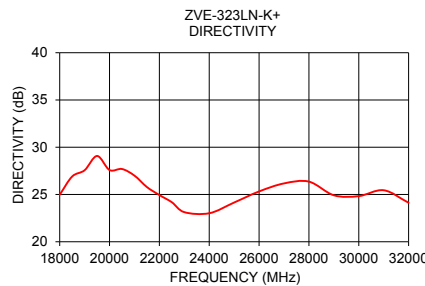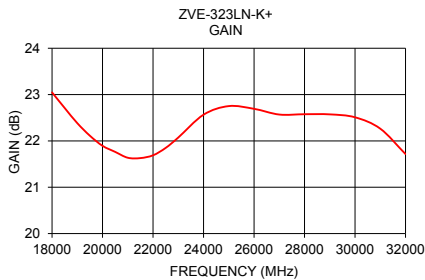

- NOTES**
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
  - B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
  - C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Low Noise Wideband Amplifier

# ZVE-323LN-K+

## Typical Performance Data

FREQUENCY (MHz)	GAIN (dB) 12V	DIRECTIVITY (dB) 12V	VSWR (:1)		NOISE FIGURE (dB) 12V	Pout at 1 dB COMPRESSION (dBm) 12V	OUTPUT IP3 (dBm) 12V
			IN 12V	OUT 12V			
18000	23.05	24.97	1.48	1.44	2.65	10.60	20.09
18500	22.71	26.90	1.45	1.48	2.55	11.14	20.97
19000	22.38	27.57	1.44	1.51	2.33	11.45	21.41
19500	22.11	29.08	1.45	1.52	2.43	11.67	21.65
20000	21.89	27.59	1.46	1.52	2.64	12.12	22.29
20500	21.76	27.70	1.48	1.51	2.54	12.07	23.03
21000	21.64	27.00	1.48	1.51	2.33	12.33	23.60
21500	21.63	25.79	1.46	1.51	2.44	12.61	24.18
22000	21.69	24.94	1.44	1.54	2.59	12.34	24.16
22500	21.85	24.18	1.40	1.58	2.71	12.64	24.71
23000	22.07	23.13	1.37	1.65	2.66	13.10	24.38
23500	22.33	22.90	1.37	1.73	2.54	12.82	24.97
24000	22.57	23.02	1.39	1.80	2.59	13.00	24.97
24500	22.71	24.34	1.43	1.83	2.65	13.00	25.14
25000	22.75	24.15	1.46	1.84	2.55	12.74	25.83
25500	22.74	25.17	1.48	1.81	2.37	13.07	25.51
26000	22.69	25.32	1.48	1.75	2.43	12.85	26.12
26500	22.64	25.15	1.47	1.68	2.47	12.78	25.96
27000	22.57	26.17	1.45	1.60	2.54	12.72	25.61
27500	22.58	25.75	1.43	1.53	2.38	12.91	25.50
28000	22.58	26.36	1.40	1.45	2.38	13.19	25.42
28500	22.58	25.50	1.37	1.38	2.50	13.21	25.50
29000	22.57	24.92	1.31	1.33	2.57	13.14	25.55
29500	22.56	24.81	1.24	1.29	2.52	13.08	25.71
30000	22.51	24.83	1.15	1.27	2.54	12.46	25.80
30500	22.42	25.30	1.04	1.26	2.52	16.00	25.97
31000	22.26	25.45	1.10	1.25	2.50	14.04	25.88
31500	22.03	23.92	1.29	1.25	2.79	14.49	25.92
32000	21.72	24.13	1.55	1.24	3.05	15.18	26.12









P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site  
 The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)



IF/RF MICROWAVE COMPONENTS


REV. OR  
 ZVE-323LN-K+  
 4/3/2019  
 Page 1 of 1

## Typical Performance Curves

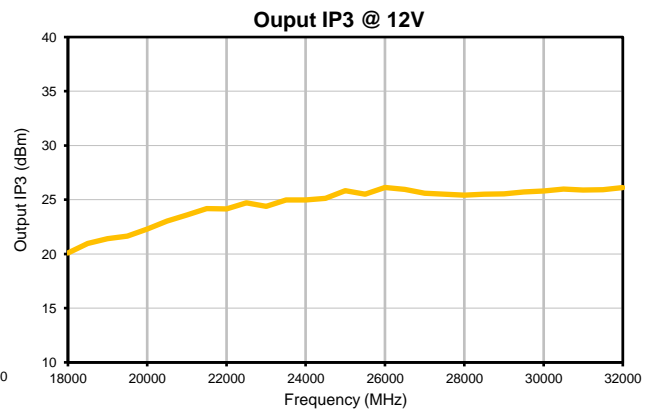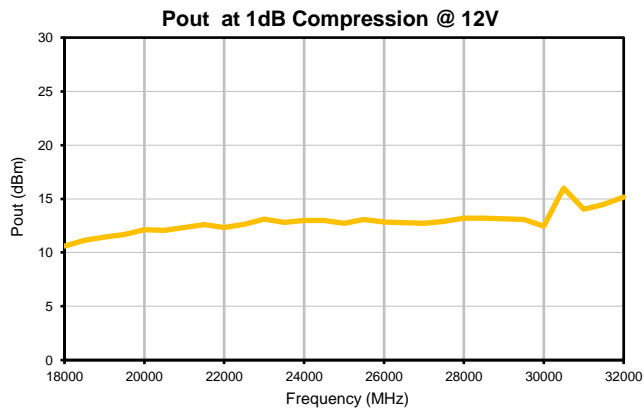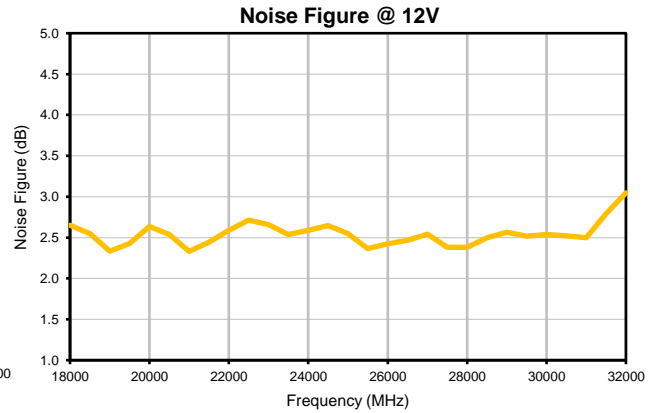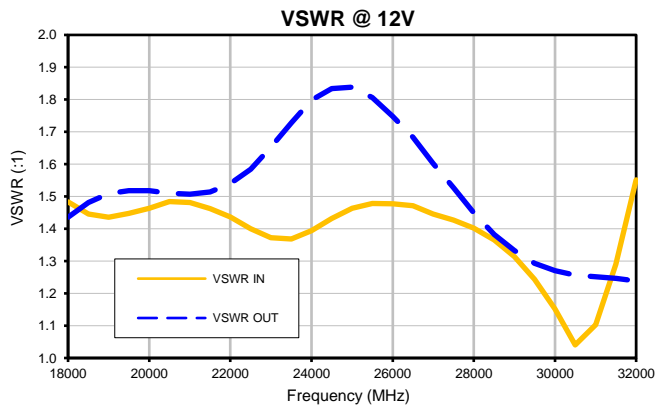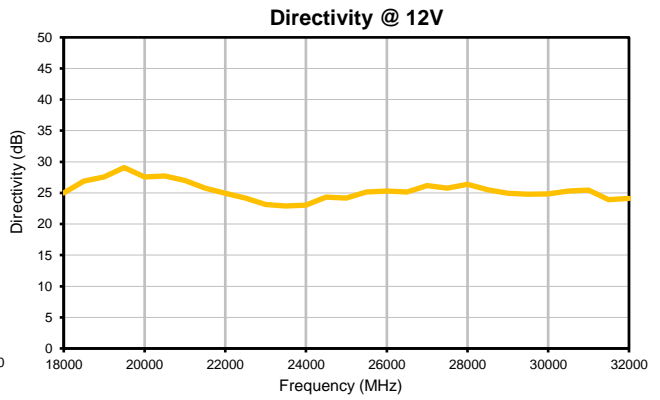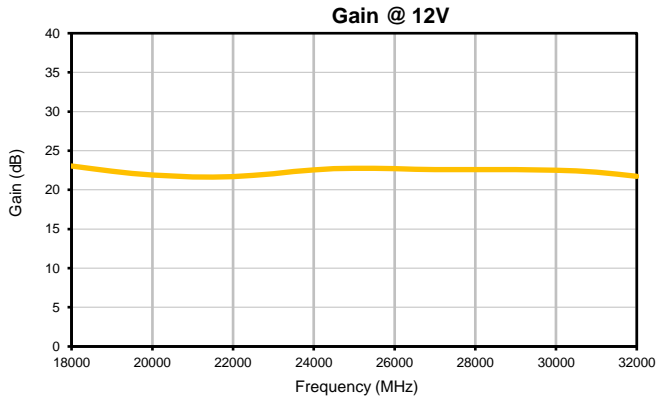


## Outline Dimensions

AV1280-1

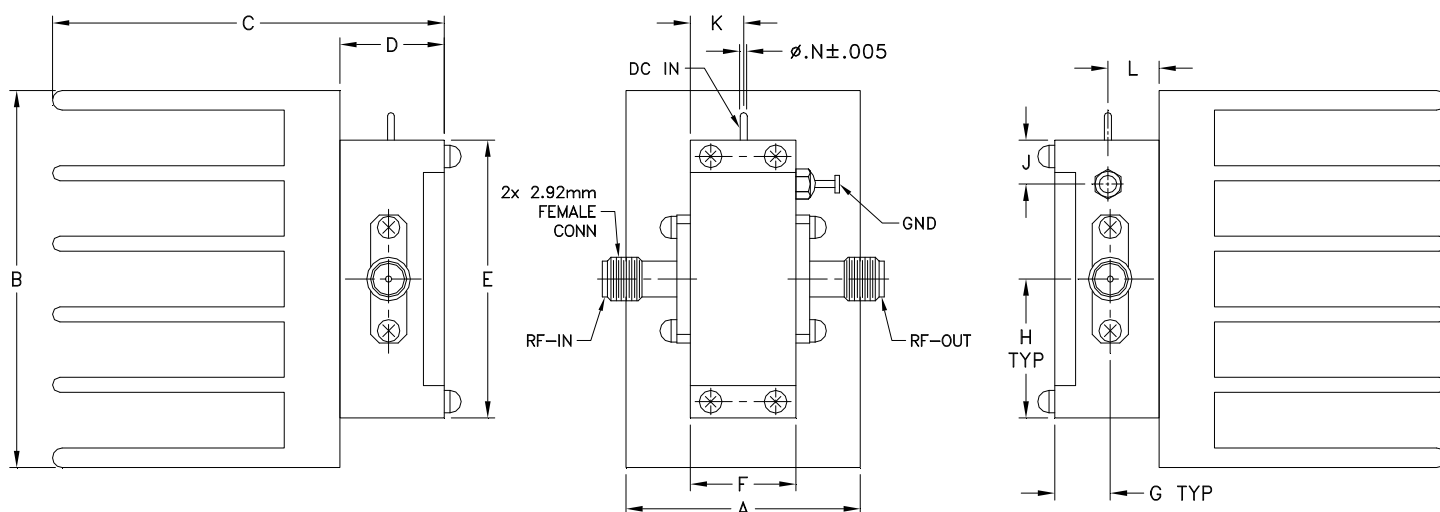

### MOUNTING INFORMATION FOR MODELS WITHOUT HEATSINK

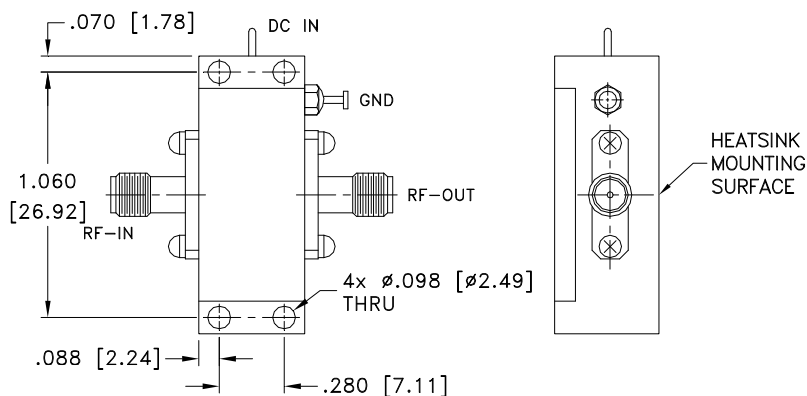

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N	WT. GRAM
AV1280-1	1.01 (25.65)	1.63 (41.40)	1.74 (44.20)	.45 (11.43)	1.20 (30.48)	.46 (11.58)	.24 (6.10)	.60 (15.24)	.19 (4.83)	.23 (5.84)	.22 (5.59)	--	.03 (.76)	58

CASE#	WT. WITHOUT HEATSINK GRAM
AV1280-1	17

Dimensions are in inches (mm). Tolerances: 2Pl.  $\pm .03$ ; 3Pl.  $\pm .015$

### Notes:

1. Case material: Aluminum alloy.
2. Case finish: Nickel plate.
3. Heat sink finish: Black anodize.

**Mini-Circuits®**  
ISO 9001 ISO 14001 CERTIFIED

ALL NEW  
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 54° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Stabilization Bake	(non-operating) 125°C, 24 hours	- - -
Burn-in at Elevated Temp.	(DC on) 160 hours at 85° C	MIL-STD-202, Method 108
Thermal Shock	-55° to 100°C, 5 cycles	MIL-STD-202, Method 107, Condition A, except 100°C