

Power Detector

50Ω, -50dBm to +15dBm, 10 to 8000 MHz

ZX47-50+ ZX47-50LN+



CASE STYLE: HN1173

Connectors	Model
SMA	ZX47-50-S+
SMA	ZX47-50LN-S+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
DC Power:	
Max. voltage	5.7V
Max. current	120mA
Internal Power Dissipation	0.73W
Input Power	+22dBm

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

RF IN	1
DC OUT	5
Vcc (+5V)	2
TEMPERATURE SENSOR	4
GROUND	3

Features

- Low Noise (Output Ripple) for ZX47-50LN+, 20mVp-p Typ. @ 10MHz
- High Dynamic Range
- Wide Bandwidth
- Single Supply Voltage: +5V
- Stability Over Temperature
- Built-in Temperature Sensor
- Protected by US patent 6,790,049

Applications

- RF/IF Power Measurements
- Low Cost Power Monitoring System
- RF Leakage Monitors
- Fast feedback Levelling Circuits
- RF Power Control
- Receiver RF/IF Gain Control
- RSSI measurements


Electrical Specifications (T_{AMB} = 25°C)

FREQ. (MHz)	DYNAMIC RANGE AT ±1dB ERROR (dBm)	OUTPUT VOLT. RANGE (V)	SLOPE (mV/dB) (Note 1)	VSWR (:1)	PULSE RESPONSE TIME (nSec) Typ.		TEMP. SENSOR OUTPUT SLOPE (mV/°C) (Note 2)	DC OPERATING POWER				
					ZX47-50+ Rise	ZX47-50LN+ Fall		Vcc (Volts)		Note 3 Current (mA)		
Min. Max.	Typ.	Typ.	Typ.	Typ.			Typ.	Min. Typ. Max. Typ.				
10 1000	-45 to +10			1.05				4.5 5.0 5.5 100				
1000 5000	-50 to +5	0.50 - 2.10	-25	1.20	400 10	800 400	2.00					
5000 6000	-45 to +10			1.30								
6000 8000	-40 to +15			1.20								

Notes:

1. The negative slope indicates that Output Voltage decreases as Input Power increases. See "Output Voltage vs Input Power" graph below.
2. Temperature sensor output provides a DC Output Voltage which increases linearly with temperature rise. Recommended minimum load for this port is 2 kΩ.
3. Recommended minimum load at DC out port is 100 Ω. See maximum ratings for no damage.

Outline Drawing

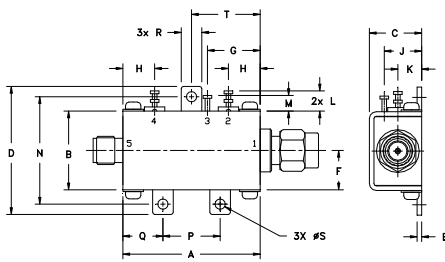


NOTE: When soldering the DC connections, caution must be used to avoid overheating the DC terminals. See Application Note AN-40-10.

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K
1.20	.69	.46	1.12	.04	.34	.46	.28	.33	.21
30.48	17.53	11.68	28.45	1.02	8.64	11.68	7.11	8.38	5.33
L	M	N	P	Q	R	S	T	wt.	
.18	.14	.94	.50	.35	.18	.106	.60	grams	
4.57	3.56	23.88	12.70	8.89	4.57	2.69	15.24	31.8	


Simplified Functional Diagram

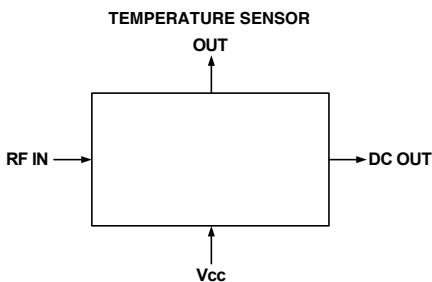

Notes


- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Output Voltage Vs Input Power @ +25°C

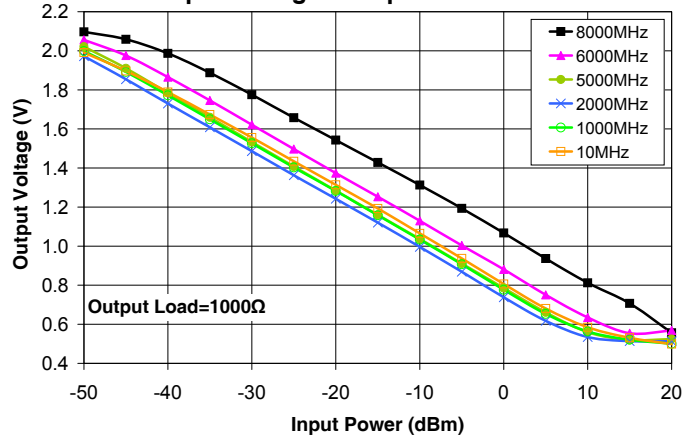


Performance Curves


Power Input Deviation from Ideal Vs Output Voltage @ Freq 10MHz

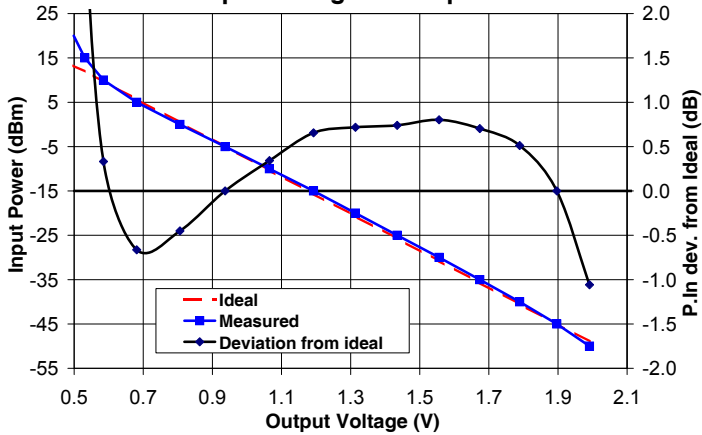


Power Input Deviation from Ideal Vs Output Voltage @ Freq 2000MHz

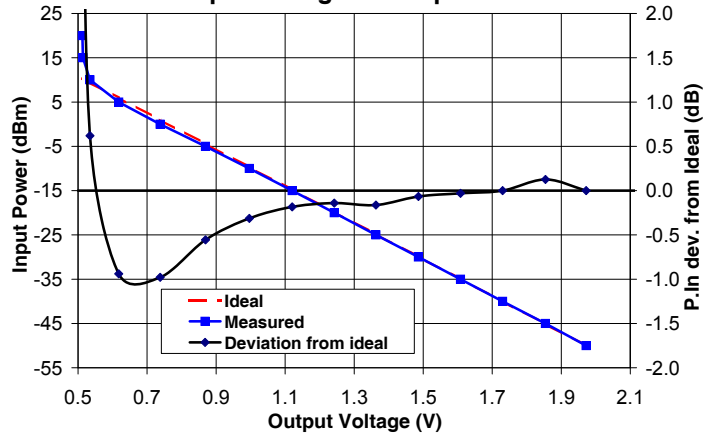


Power Input Deviation from Ideal Vs Output Voltage @ Freq 6000MHz

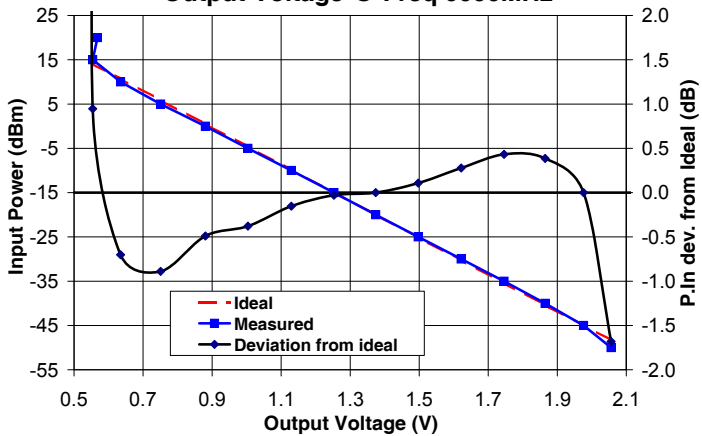


Power Input Deviation from Ideal Vs Output Voltage @ Freq 8000MHz

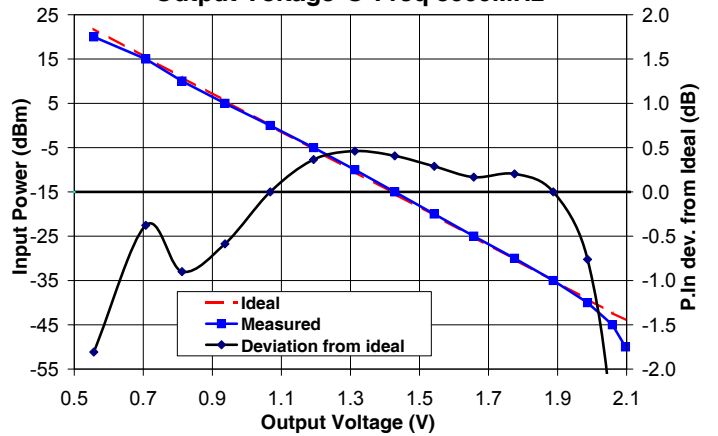

Output Voltage Change Vs Freq Over Temperature Range

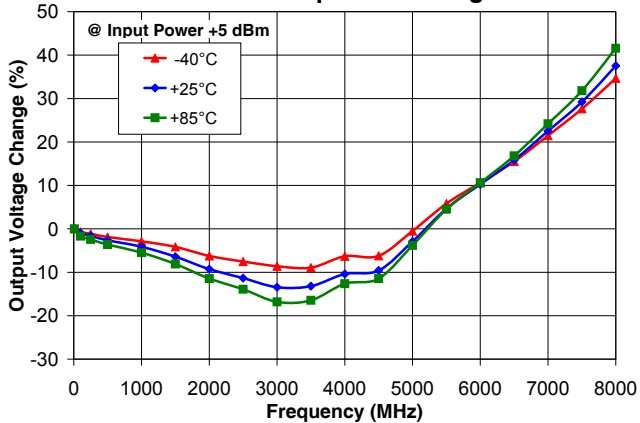

Output Voltage Change Vs Freq Over Temperature Range

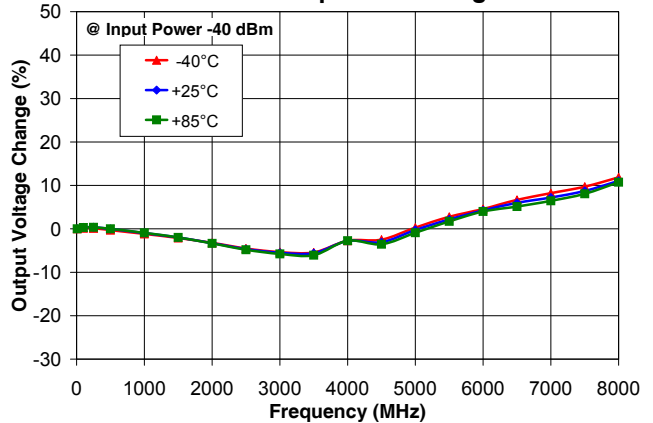


Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




Performance Curves


Slope Vs Input Power Over Temperature Range @ Freq 10MHz

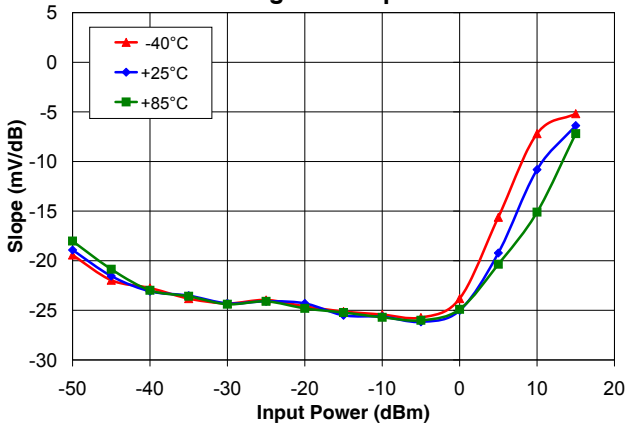


Slope Vs Freq Over Temperature Range @ Input Power -45dBm

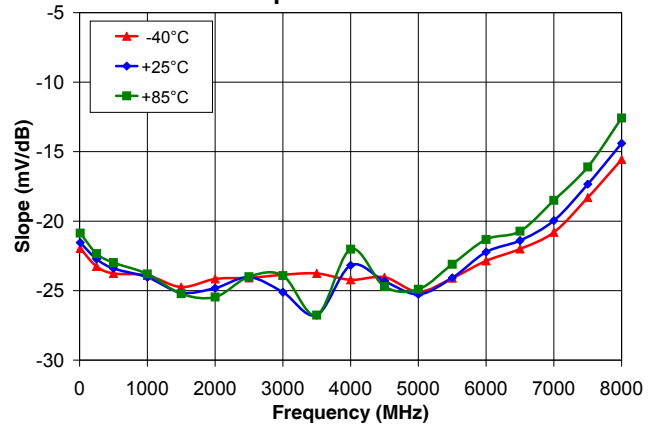


Slope Vs Input Power Over Temperature Range @ Freq 5000MHz

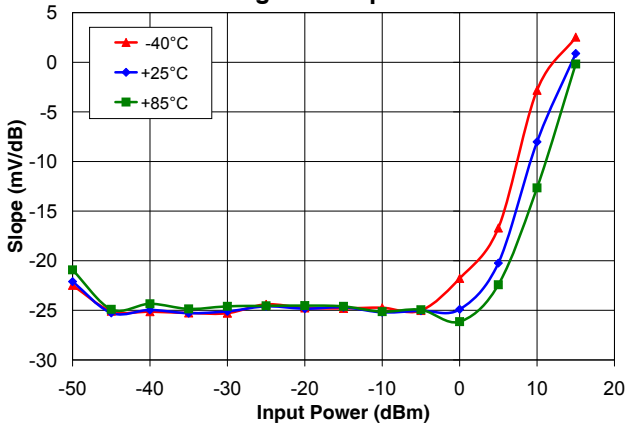


Slope Vs Freq Over Temperature Range @ Input Power -25dBm

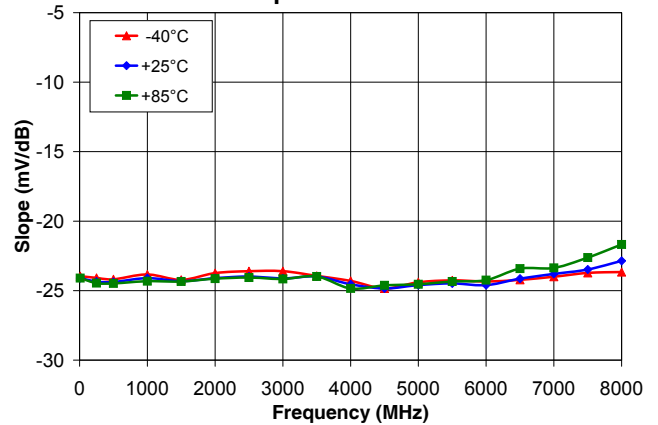

Slope Vs Input Power Over Temperature Range @ Freq 8000MHz

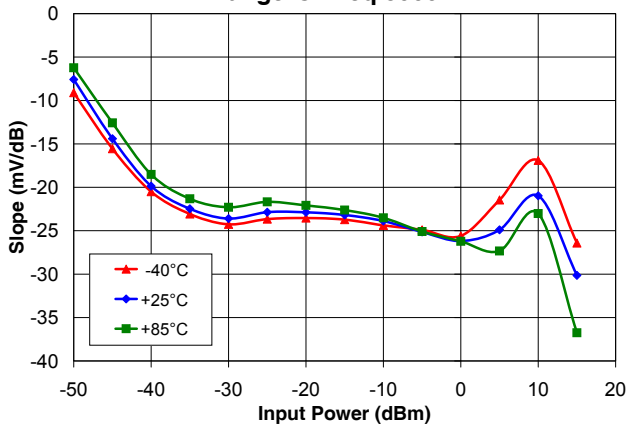




Slope Vs Freq Over Temperature Range @ Input Power 0dBm

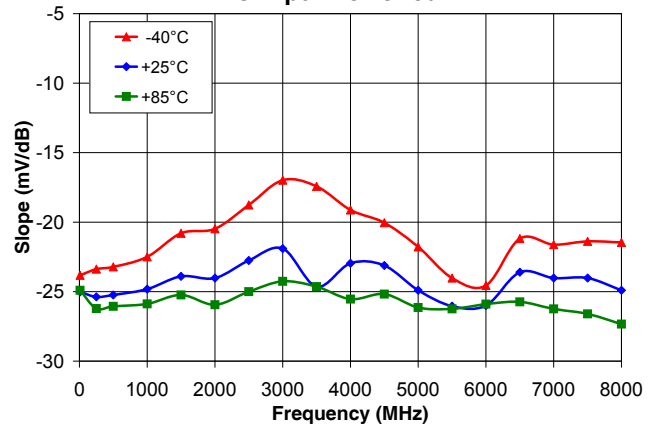

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



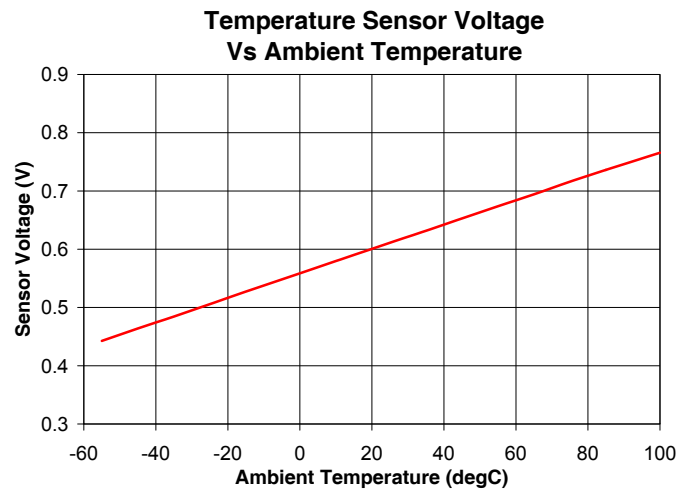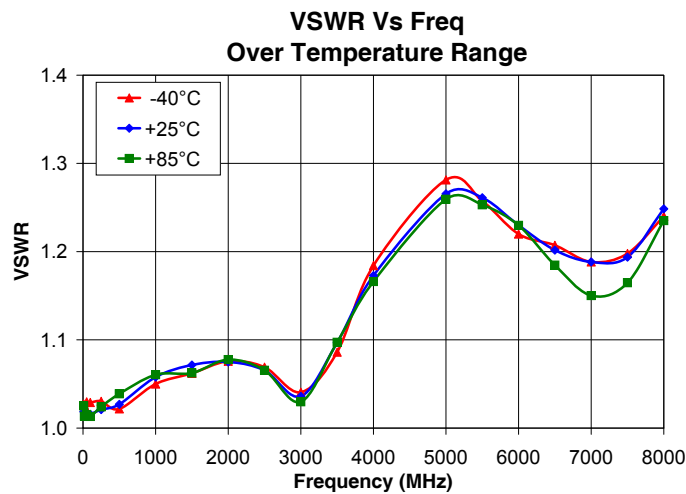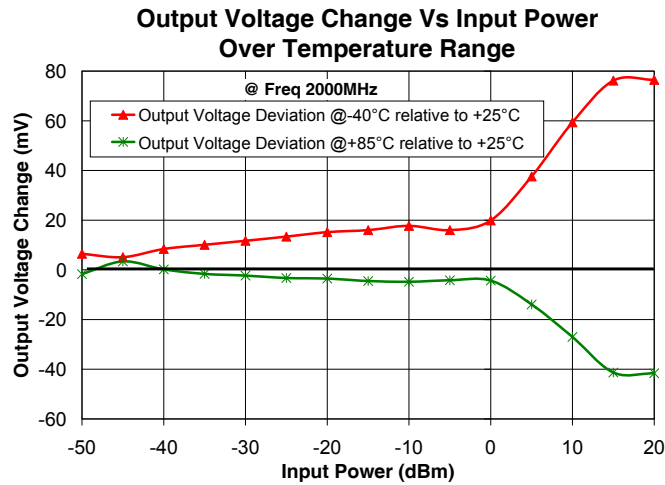

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Power Detector

ZX47-50LN+

Typical Performance Data

Output Voltage vs. Input Power @+25°C						
POWER IN (dBm)	@10MHz (V)	@1000MHz (V)	@2000MHz (V)	@5000MHz (V)	@6000MHz (V)	@8000MHz (V)
-50	1.98	1.99	1.97	2.00	2.04	2.08
-45	1.89	1.89	1.86	1.90	1.97	2.05
-40	1.79	1.77	1.73	1.77	1.86	1.98
-35	1.68	1.65	1.61	1.65	1.74	1.89
-30	1.56	1.53	1.48	1.53	1.62	1.78
-25	1.44	1.40	1.36	1.41	1.49	1.67
-20	1.32	1.28	1.24	1.28	1.37	1.56
-15	1.19	1.16	1.12	1.16	1.25	1.45
-10	1.07	1.03	0.99	1.04	1.13	1.34
-5	0.94	0.90	0.87	0.91	1.01	1.22
0	0.81	0.77	0.73	0.79	0.88	1.10
5	0.68	0.64	0.60	0.66	0.75	0.97
10	0.58	0.54	0.51	0.54	0.63	0.83
15	0.50	0.49	0.47	0.48	0.53	0.71
20	0.47	0.46	0.47	0.48	0.52	0.53

Output Voltage Change Vs Freq						
FREQ (MHz)	@ Input Power -40 dBm			@ Input Power +5dBm		
	-40°C	+25°C	+85°C	-40°C	+25°C	+85°C
10	0.00	0.00	0.00	0.00	0.00	0.00
100	0.16	0.34	0.31	-0.72	-0.98	-1.69
250	0.14	0.37	0.35	-1.14	-1.62	-2.43
500	-0.28	-0.03	0.01	-1.87	-2.63	-3.62
1000	-1.17	-0.97	-0.92	-2.88	-4.14	-5.47
1500	-2.10	-1.99	-1.97	-4.15	-6.40	-8.11
2000	-3.23	-3.30	-3.36	-6.24	-9.28	-11.45
2500	-4.53	-4.66	-4.83	-7.54	-11.34	-13.91
3000	-5.35	-5.51	-5.78	-8.63	-13.44	-16.82
3500	-5.42	-5.61	-6.07	-8.93	-13.20	-16.45
4000	-2.74	-2.78	-2.73	-6.31	-10.40	-12.62
4500	-2.48	-3.07	-3.55	-6.22	-9.59	-11.45
5000	0.27	-0.27	-0.89	-0.52	-2.91	-3.81
5500	2.78	2.17	1.71	5.82	4.63	4.50
6000	4.56	4.24	3.99	10.60	10.23	10.62
6500	6.67	5.99	5.13	15.52	15.83	16.82
7000	8.22	7.22	6.45	21.46	22.53	24.18
7500	9.70	8.72	8.07	27.64	29.22	31.80
8000	11.86	11.06	10.72	34.66	37.53	41.57



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 *The Design Engineers Search Engine* Provides ACTUAL Data Instantly at minicircuits.com

For detailed performance specs & shopping online see web site

ISO 9001 ISO 14001 AS 9100 CERTIFIED
IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchase of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MC/Store/terms.jsp.

Power Detector

ZX47-50LN+

Typical Performance Data

Sensitivity vs. Input Power @+25°C						
Measured	@10MHz(mV/dB)			@2000MHz(mV/dB)		
	Output Voltage (V)	Ideal	Deviation from idea	Output Voltage (V)	Ideal	Deviation from idea
-50	1.99	-48.94	-1.06	1.97	-50.00	0.00
-45	1.90	-45.00	0.00	1.85	-45.13	0.13
-40	1.79	-40.51	0.51	1.73	-40.00	0.00
-35	1.67	-35.70	0.70	1.61	-34.97	-0.03
-30	1.56	-30.80	0.80	1.49	-29.93	-0.07
-25	1.43	-25.74	0.74	1.36	-24.84	-0.16
-20	1.31	-20.72	0.72	1.24	-19.86	-0.14
-15	1.19	-15.66	0.66	1.12	-14.82	-0.18
-10	1.07	-10.34	0.34	1.00	-9.69	-0.31
-5	0.94	-5.00	0.00	0.87	-4.44	-0.56
0	0.81	0.45	-0.45	0.74	0.98	-0.98
5	0.68	5.66	-0.66	0.62	5.94	-0.94
10	0.58	9.67	0.33	0.53	9.38	0.62
15	0.53	11.92	3.08	0.51	10.22	4.78
20	0.50	13.25	6.75	0.51	10.28	9.72

Sensitivity vs. Input Power @+25°C						
Measured	@6000MHz(mV/dB)			@8000MHz(mV/dB)		
	Output Voltage (V)	Ideal	Deviation from idea	Output Voltage (V)	Ideal	Deviation from idea
-50	2.06	-48.32	-1.68	2.10	-43.93	-6.07
-45	1.98	-45.00	0.00	2.06	-42.31	-2.69
-40	1.87	-40.39	0.39	1.99	-39.24	-0.76
-35	1.75	-35.43	0.43	1.89	-35.00	0.00
-30	1.62	-30.28	0.28	1.78	-30.20	0.20
-25	1.50	-25.11	0.11	1.66	-25.17	0.17
-20	1.37	-20.00	0.00	1.54	-20.29	0.29
-15	1.25	-14.97	-0.03	1.43	-15.41	0.41
-10	1.13	-9.85	-0.15	1.31	-10.46	0.46
-5	1.00	-4.62	-0.38	1.19	-5.36	0.36
0	0.88	0.49	-0.49	1.07	0.00	0.00
5	0.75	5.89	-0.89	0.94	5.59	-0.59
10	0.63	10.70	-0.70	0.81	10.90	-0.90
15	0.55	14.05	0.95	0.71	15.38	-0.38
20	0.57	13.48	6.52	0.56	21.81	-1.81



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp.

Power Detector

ZX47-50LN+

Typical Performance Data

POWER IN (dBm)	Slope Vs Input Power Over Temperature								
	Range @ Freq 10MHz			Range @ Freq 5000MHz			Range @ Freq 8000MHz		
	-40°C	+25°C	+85°C	-40°C	+25°C	+85°C	-40°C	+25°C	+85°C
-50	-19.42	-18.92	-18.02	-22.48	-22.10	-20.92	-9.10	-7.58	-6.24
-45	-21.96	-21.54	-20.86	-25.08	-25.26	-24.90	-15.56	-14.40	-12.58
-40	-22.74	-23.08	-22.98	-25.14	-24.96	-24.34	-20.50	-19.86	-18.52
-35	-23.82	-23.52	-23.58	-25.26	-25.28	-24.86	-23.08	-22.48	-21.32
-30	-24.30	-24.30	-24.38	-25.28	-25.10	-24.60	-24.26	-23.60	-22.30
-25	-23.96	-24.10	-24.10	-24.40	-24.60	-24.54	-23.66	-22.86	-21.68
-20	-24.60	-24.30	-24.80	-24.76	-24.84	-24.52	-23.54	-22.88	-22.08
-15	-25.12	-25.50	-25.22	-24.80	-24.70	-24.60	-23.72	-23.18	-22.62
-10	-25.42	-25.64	-25.70	-24.74	-25.20	-25.14	-24.38	-23.88	-23.52
-5	-25.72	-26.16	-26.00	-25.02	-25.04	-24.94	-24.90	-25.14	-25.10
0	-23.82	-25.02	-24.90	-21.78	-24.90	-26.14	-25.60	-26.18	-26.22
5	-15.62	-19.22	-20.36	-16.70	-20.24	-22.42	-21.46	-24.90	-27.34
10	-7.20	-10.82	-15.10	-2.82	-8.02	-12.66	-16.90	-20.98	-23.02
15	-5.18	-6.38	-7.20	2.54	0.88	-0.18	-26.42	-30.14	-36.76

FREQ (MHz)	Slope Vs Freq Over Temperature Range								
	@ Input Power -45dBm			@ Input Power -25dBm			@ Input Power 0dBm		
	-40°C	+25°C	+85°C	-40°C	+25°C	+85°C	-40°C	+25°C	+85°C
10	-21.96	-21.54	-20.86	-23.96	-24.10	-24.1	-23.82	-25.02	-24.90
250	-23.26	-22.72	-22.34	-24.08	-24.34	-24.46	-23.38	-25.38	-26.22
500	-23.76	-23.40	-22.98	-24.18	-24.38	-24.48	-23.22	-25.24	-26.06
1000	-23.90	-24.04	-23.80	-23.84	-24.10	-24.32	-22.50	-24.82	-25.88
1500	-24.74	-25.14	-25.22	-24.22	-24.32	-24.34	-20.80	-23.90	-25.24
2000	-24.16	-24.82	-25.46	-23.74	-24.10	-24.14	-20.48	-24.02	-25.94
2500	-24.08	-24.04	-24.00	-23.60	-23.98	-24.06	-18.76	-22.76	-25.00
3000	-23.86	-25.12	-23.92	-23.60	-24.12	-24.16	-16.98	-21.90	-24.26
3500	-23.76	-26.76	-26.76	-23.94	-23.98	-23.98	-17.42	-24.64	-24.64
4000	-24.22	-23.18	-22.02	-24.30	-24.54	-24.84	-19.12	-22.96	-25.54
4500	-24.04	-24.32	-24.70	-24.84	-24.84	-24.62	-20.04	-23.12	-25.18
5000	-25.08	-25.26	-24.90	-24.40	-24.60	-24.54	-21.78	-24.90	-26.14
5500	-24.10	-24.08	-23.10	-24.26	-24.48	-24.34	-24.02	-26.04	-26.24
6000	-22.86	-22.22	-21.32	-24.34	-24.60	-24.24	-24.56	-26.00	-25.90
6500	-22.00	-21.40	-20.72	-24.22	-24.14	-23.42	-21.18	-23.60	-25.74
7000	-20.80	-19.96	-18.50	-24.00	-23.80	-23.36	-21.62	-24.02	-26.24
7500	-18.30	-17.34	-16.10	-23.72	-23.48	-22.62	-21.38	-24.02	-26.60
8000	-15.56	-14.40	-12.58	-23.66	-22.86	-21.68	-21.46	-24.90	-27.34



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 www.minicircuits.com Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchase of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCIStore/terms.jsp.

Power Detector

ZX47-50LN+

Typical Performance Data

Output Voltage Change Vs Input Power		
POWER IN (dBm)	Output Voltage Deviation @-40°C relative to +25°C	Output Voltage Deviation @+80°C relative to +25°C
-50	6.50	-1.70
-45	5.10	3.40
-40	8.40	0.20
-35	10.10	-1.60
-30	11.70	-2.30
-25	13.40	-3.30
-20	15.20	-3.50
-15	16.00	-4.50
-10	17.70	-4.80
-5	16.00	-4.20
0	19.90	-4.30
5	37.60	-13.90
10	59.40	-27.00
15	76.20	-41.30
20	76.50	-41.60

VSWR Vs Freq			
FREQ (MHz)	-40dBm	+25dBm	+85dBm
10	1.03	1.02	1.03
20	1.03	1.02	1.01
50	1.03	1.02	1.02
100	1.03	1.02	1.01
250	1.03	1.02	1.02
500	1.02	1.03	1.04
1000	1.05	1.06	1.06
1500	1.06	1.07	1.06
2000	1.08	1.07	1.08
2500	1.07	1.07	1.07
3000	1.04	1.04	1.03
3500	1.09	1.10	1.10
4000	1.18	1.17	1.17
5000	1.28	1.27	1.26
5500	1.26	1.26	1.25
6000	1.22	1.23	1.23
6500	1.21	1.20	1.18
7000	1.19	1.19	1.15
7500	1.20	1.19	1.16
8000	1.24	1.25	1.24

Temperature Sensor Voltage Vs Ambient	
Temp (°C)	Voltage @ 8000MHz
-55	0.44
-45	0.46
-35	0.48
-25	0.51
-15	0.53
0	0.56
10	0.58
20	0.60
27	0.62
35	0.63
45	0.65
55	0.67
65	0.69
75	0.72
85	0.74
100	0.77



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 www.minicircuits.com Provides ACTUAL Data Instantly at minicircuits.com

For detailed performance specs & shopping online see web site








ISO 9001 ISO 14001 AS 9100 CERTIFIED
IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchase of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCStore/terms.jsp.

Power Detector

ZX47-50LN+

Typical Performance Curves

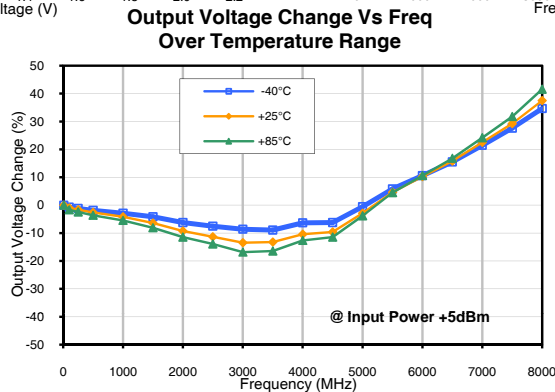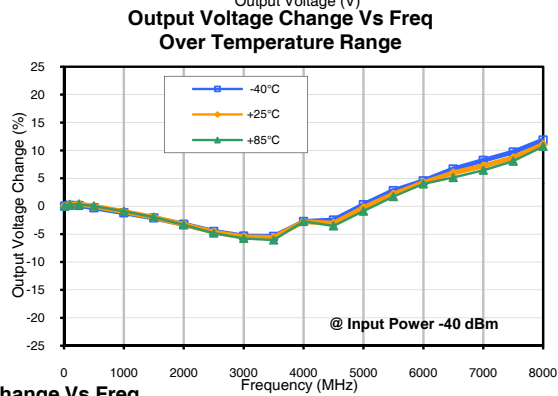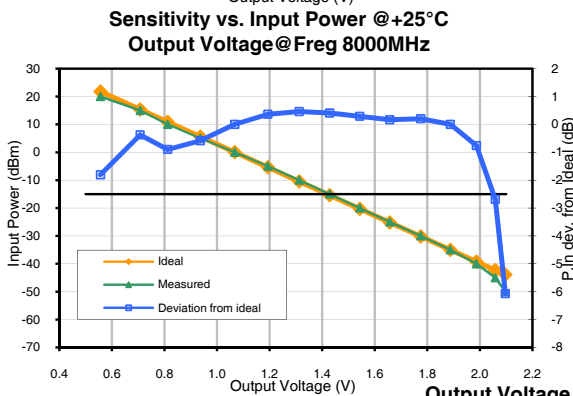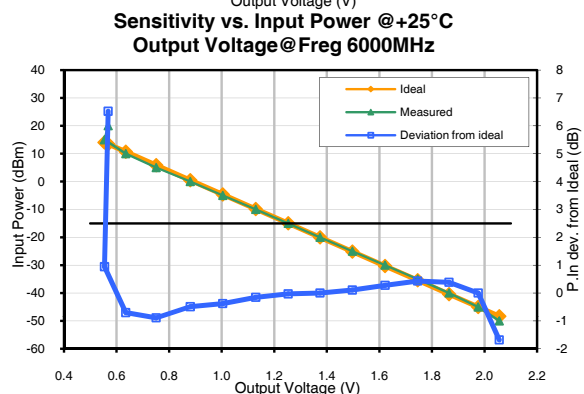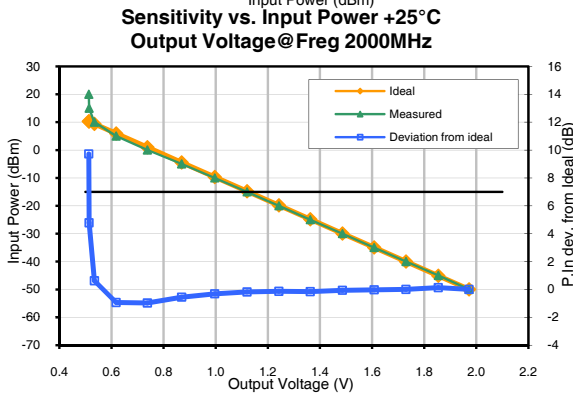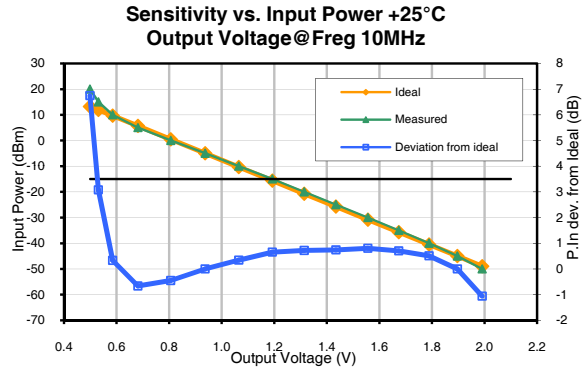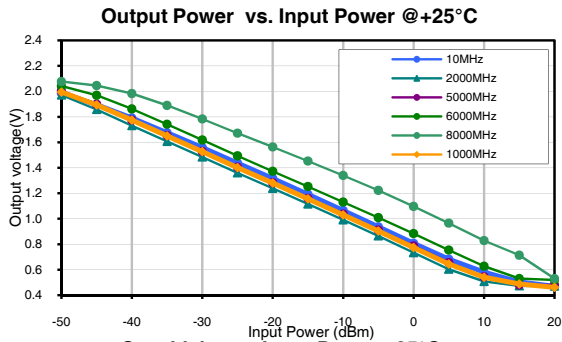

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

For detailed performance specs & shopping online see web site


Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits' applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCIStore/terms.jsp.

Power Detector


ZX47-50LN+

Typical Performance Curves


Slope Vs Input Power Over Temperature Range @ Freq 10MHz

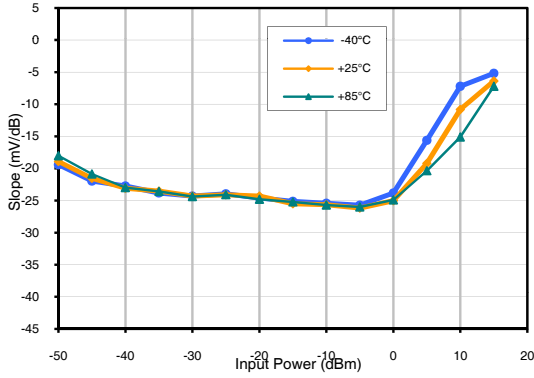


Slope Vs Freq Over Temperature Range @ Input Power -45dBm

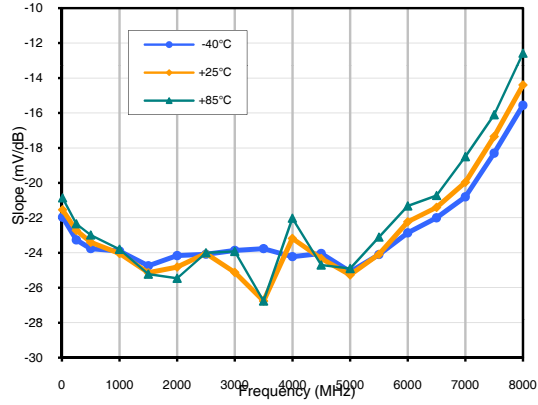


Slope Vs Input Power Over Temperature Range @ Freq 5000MHz

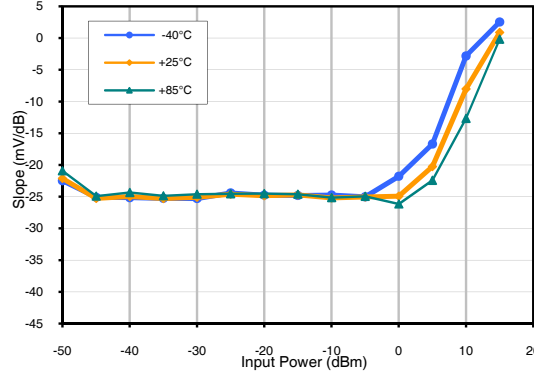


Slope Vs Freq Over Temperature Range @ Input Power -25dBm

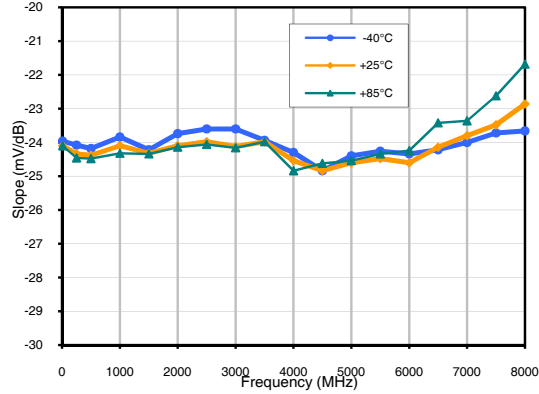

Slope Vs Input Power Over Temperature Range @ Freq 8000MHz

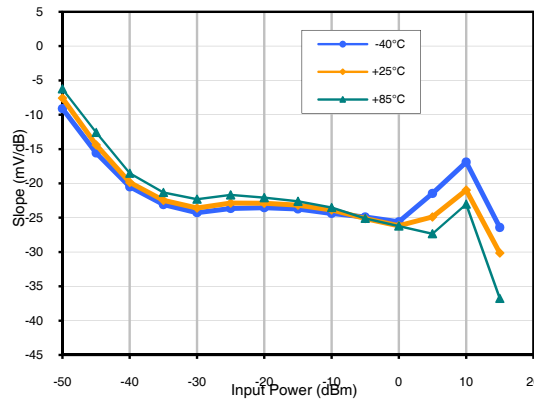


Slope Vs Freq Over Temperature Range @ Input Power 0dBm

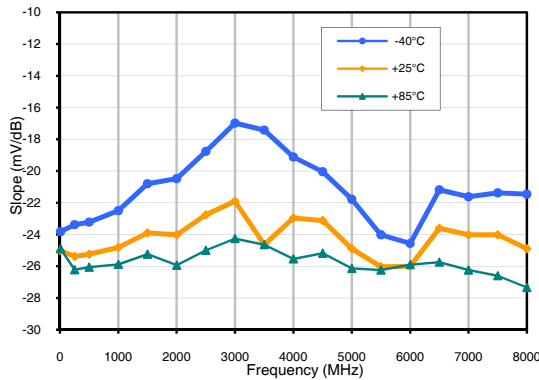


Typical Performance Curves


Output Voltage Change Vs Input Power Over Temperature Range

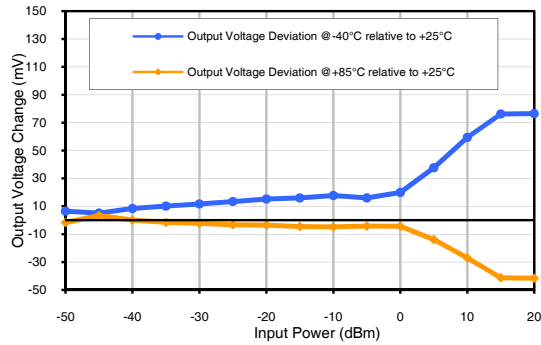

VSWR Vs Freq Over Temperature Range

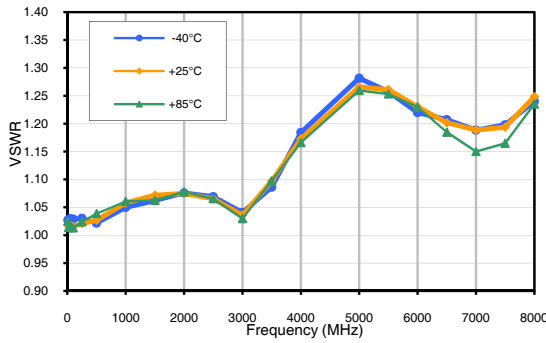

Temperature Sensor Voltage Vs Ambient Temperature

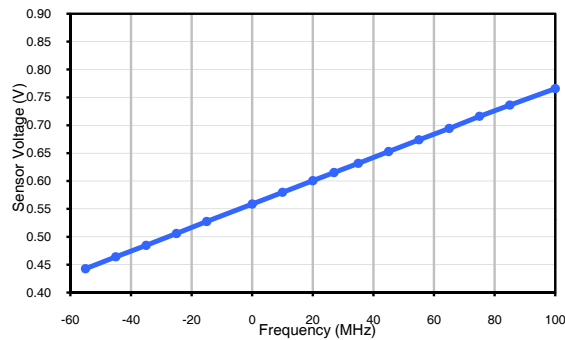

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 www.minicircuits.com Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site


Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchase of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MC/Store/terms.jsp.

Case Style

HN

Outline Dimensions

HN1173

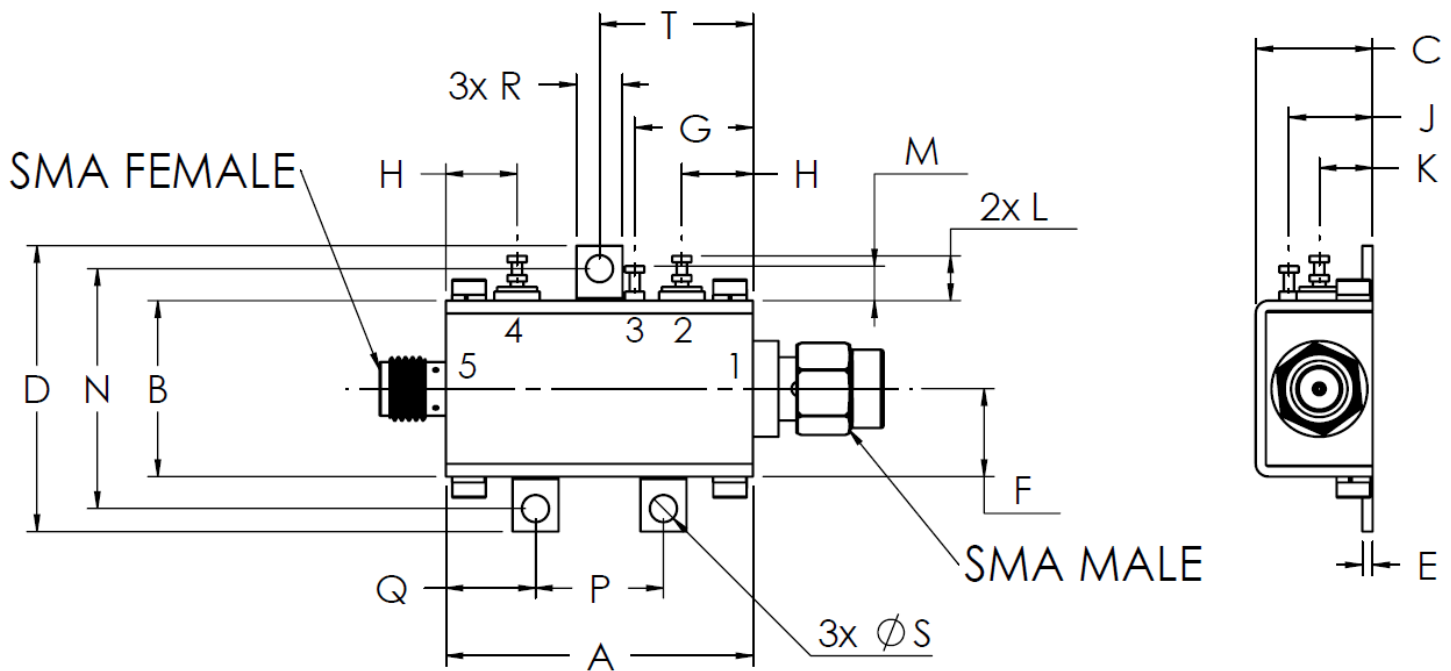

CASE #.	A	B	C	D	E	F	G	H	J	K	L	M	N
HN1173	1.20 (30.48)	.69 (17.53)	.46 (11.68)	1.12 (28.45)	.04 (1.02)	.34 (8.64)	.46 (11.68)	.28 (7.11)	.35 (8.89)	.21 (5.28)	.18 (4.57)	.14 (3.56)	.94 (23.88)

CASE #.	P	Q	R	S	T	WT GRAMS
HN1173	.50 (12.70)	.35 (8.89)	.18 (4.57)	.106 (2.69)	.60 (15.24)	31.8

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .03$; 3Pl. $\pm .015$
Tolerance on hole size and interaxes dimensions to be $\pm .005$.

Note:

1. Case material: Brass
2. Case finish: Nickel plate

Mini-Circuits[®]

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I