

Power Detector

ZX47-60+ ZX47-60LN+

50Ω, -60dBm to +5dBm, 10 to 8000 MHz

Maximum Ratings


| | |
|----------------------------|----------------|
| Operating Temperature | -40°C to 85°C |
| Storage Temperature | -55°C to 100°C |
| DC Power: | |
| Max. voltage | 5.7V |
| Max. current | 120mA |
| Internal Power Dissipation | 0.73W |
| Input Power | +15dBm |

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

| | |
|--------------------|---|
| RF IN | 1 |
| DC OUT | 5 |
| Vcc (+5V) | 2 |
| TEMPERATURE SENSOR | 4 |
| GROUND | 3 |

Outline Drawing

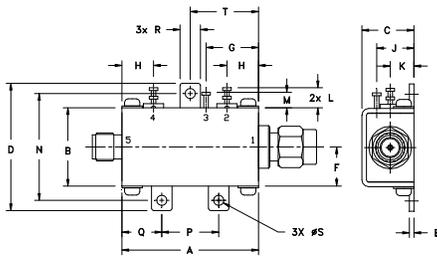


NOTE: When soldering the DC connections, caution must be used to avoid overheating the DC terminals. See Application Note [AN-40-10](#).

Outline Dimensions (inch/mm)

| | | | | | | | | | |
|-------|-------|-------|-------|------|------|-------|-------|-------|------|
| A | B | C | D | E | F | G | H | J | K |
| 1.20 | .69 | .46 | 1.12 | .04 | .34 | .46 | .28 | .33 | .21 |
| 30.48 | 17.53 | 11.68 | 28.45 | 1.02 | 8.64 | 11.68 | 7.11 | 8.38 | 5.33 |
| L | M | N | P | Q | R | S | T | wt. | |
| .18 | .14 | .94 | .50 | .35 | .18 | .106 | .60 | grams | |
| 4.57 | 3.56 | 23.88 | 12.70 | 8.89 | 4.57 | 2.69 | 15.24 | 31.8 | |

Simplified Functional Diagram

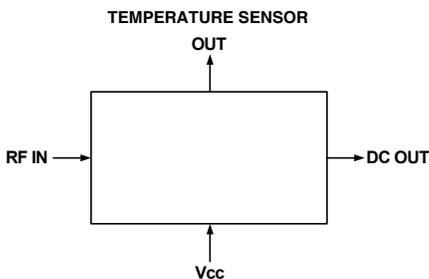

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- Low Noise (Output Ripple) for ZX47-60LN+, 20mVp-p Typ. @ 10MHz
- High Dynamic Range
- Wide Bandwidth
- Single Supply Voltage: +5V
- Stability Over Temperature
- Built-in Temperature Sensor
- Protected by US patent 6,790,049

Applications

- RF/IF Power Measurements
- Low Cost Power Monitoring System
- RF Leakage Monitors
- Fast feedback Levelling Circuits
- RF Power Control
- Receiver RF/IF Gain Control
- RSSI measurements



CASE STYLE: HN1173

| Connectors | Model |
|------------|--------------|
| SMA | ZX47-60-S+ |
| SMA | ZX47-60LN-S+ |

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Electrical Specifications (T_{AMB} = 25°C)

| FREQ. (MHz) | DYNAMIC RANGE AT ±1dB ERROR (dBm) | OUTPUT VOLT. RANGE (V) | SLOPE (mV/dB) (Note 1) | VSWR (:1) | PULSE RESPONSE TIME (nSec) Typ. | | TEMP. SENSOR OUTPUT SLOPE (mV/°C) (Note 2) | DC OPERATING POWER | | | |
|-------------|-----------------------------------|------------------------|------------------------|-----------|---------------------------------|-----------------|--|--------------------|------|---------------------|------|
| | | | | | ZX47-60+ Rise | ZX47-60LN+ Fall | | Vcc (Volts) | | Note 3 Current (mA) | |
| Min. | Max. | Typ. | Typ. | Typ. | | | Typ. | Min. | Typ. | Max. | Typ. |
| 10 | 1000 | -55 to 0 | | 1.1 | | | | 4.5 | 5.0 | 5.5 | 100 |
| 1000 | 5000 | -60 to -5 | 0.50 - 2.10 | 1.8 | | | | | | | |
| 5000 | 6000 | -55 to +5 | | 1.7 | | | | | | | |
| 6000 | 8000 | -50 to +5 | | 1.4 | | | | | | | |

Notes:


- The negative slope indicates that Output Voltage decreases as Input Power increases. See "Output Voltage vs Input Power" graph below.
- Temperature sensor output provides a DC Output Voltage which increases linearly with temperature rise. Recommended minimum load for this port is 2 kΩ.
- Recommended minimum load at DC out port is 100 Ω. See maximum ratings for no damage.

Output Voltage Vs Input Power @ +25°C

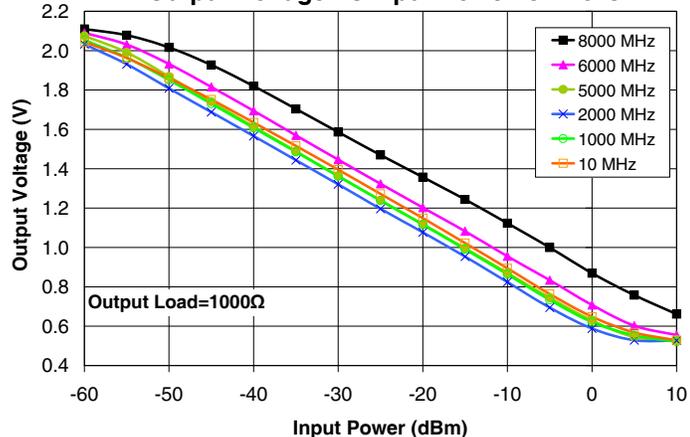


Performance Curves


Power Input Deviation from Ideal Vs Output Voltage @ Freq 10MHz

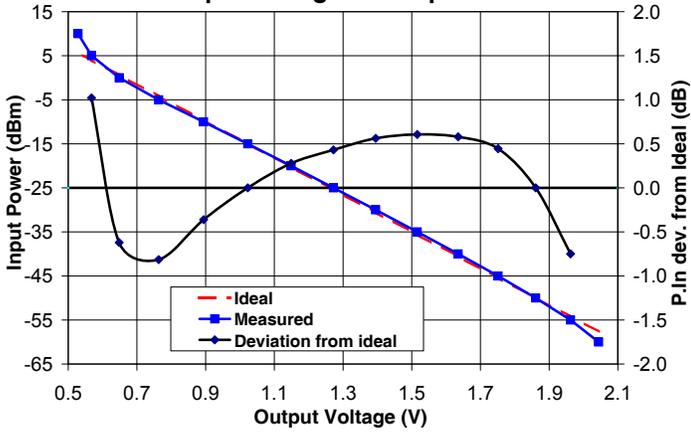


Power Input Deviation from Ideal Vs Output Voltage @ Freq 2000MHz

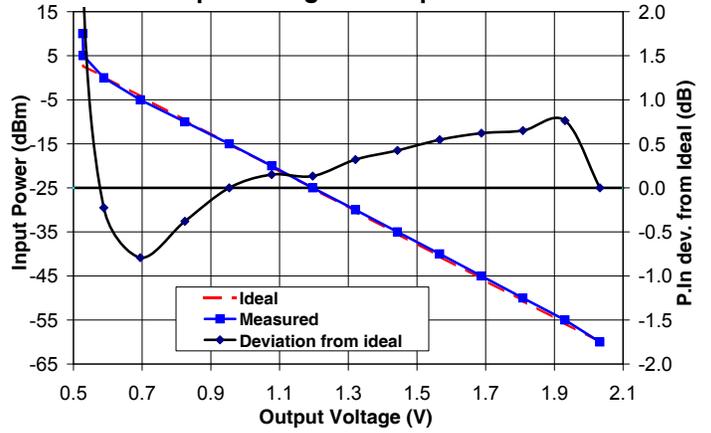


Power Input Deviation from Ideal Vs Output Voltage @ Freq 6000MHz

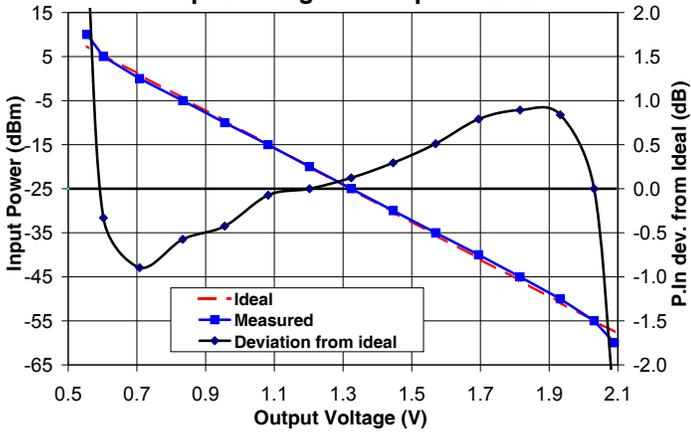


Power Input Deviation from Ideal Vs Output Voltage @ Freq 8000MHz

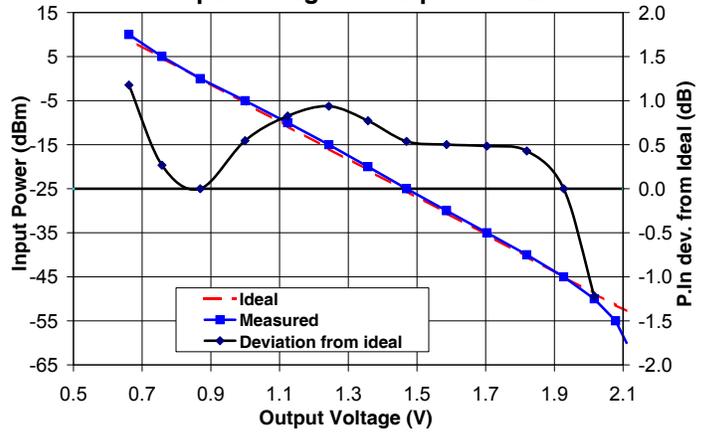

Output Voltage Change Vs Freq Over Temperature Range

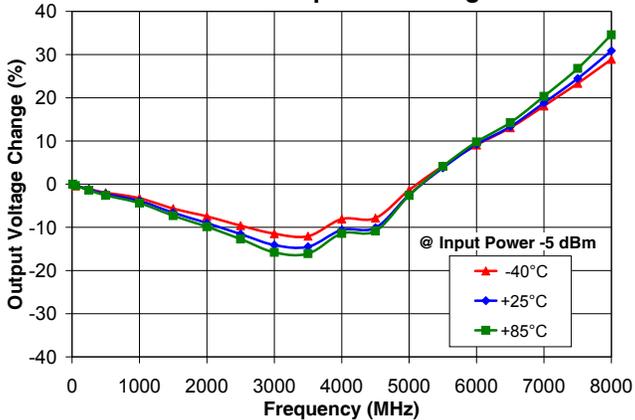

Output Voltage Change Vs Freq Over Temperature Range

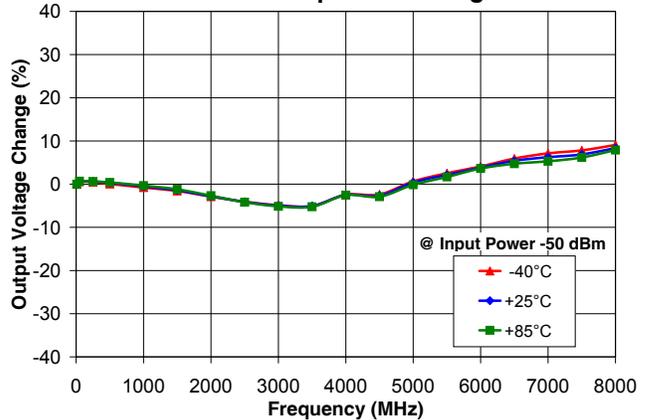


Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




Performance Curves


Slope Vs Input Power Over Temperature Range @ Freq 10MHz

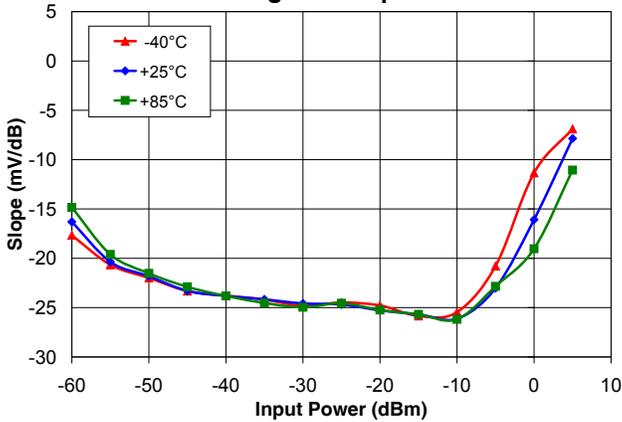


Slope Vs Freq Over Temperature Range @ Input Power -50dBm

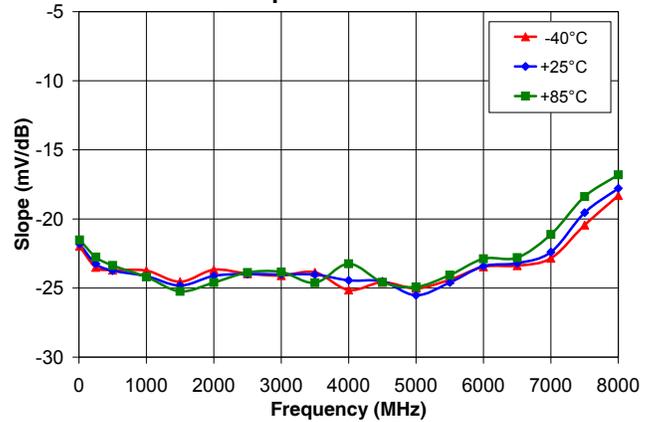


Slope Vs Input Power Over Temperature Range @ Freq 5000MHz

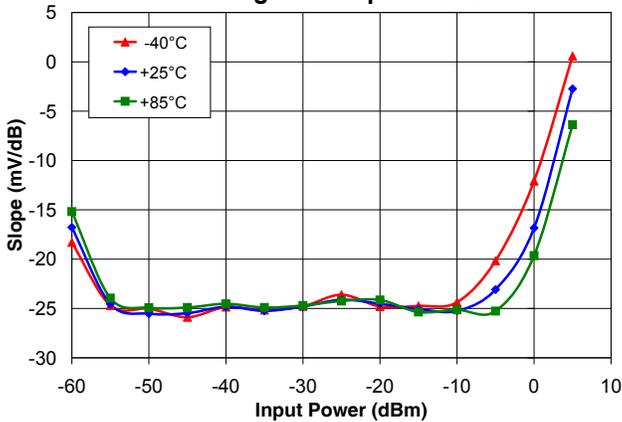


Slope Vs Freq Over Temperature Range @ Input Power -25dBm

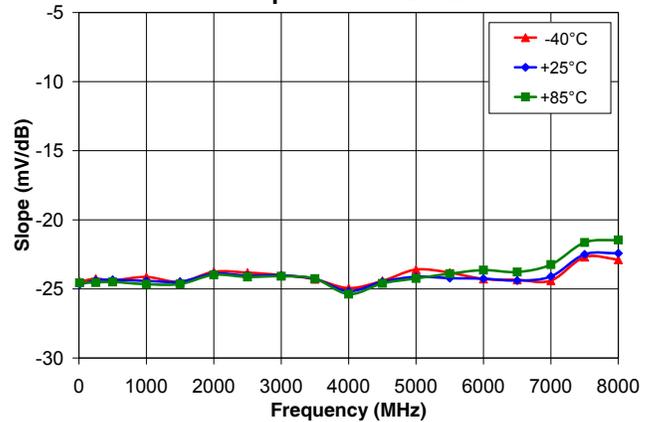

Slope Vs Input Power Over Temperature Range @ Freq 8000MHz

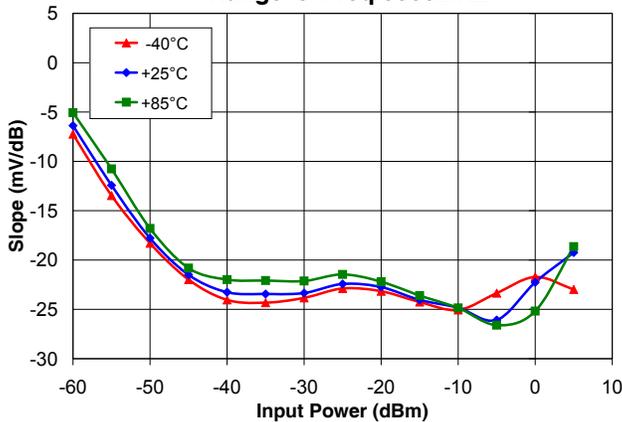




Slope Vs Freq Over Temperature Range @ Input Power -5dBm

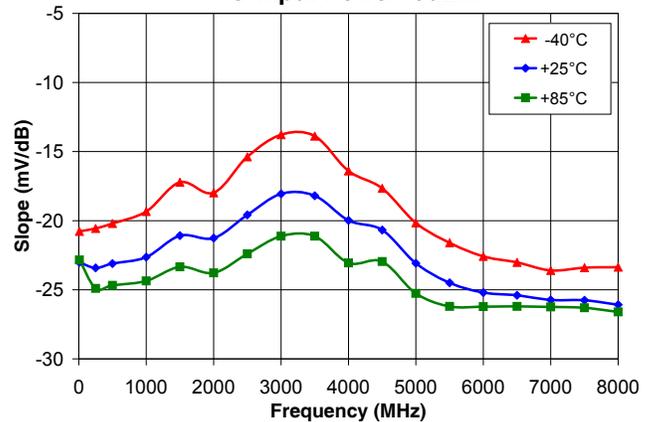

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



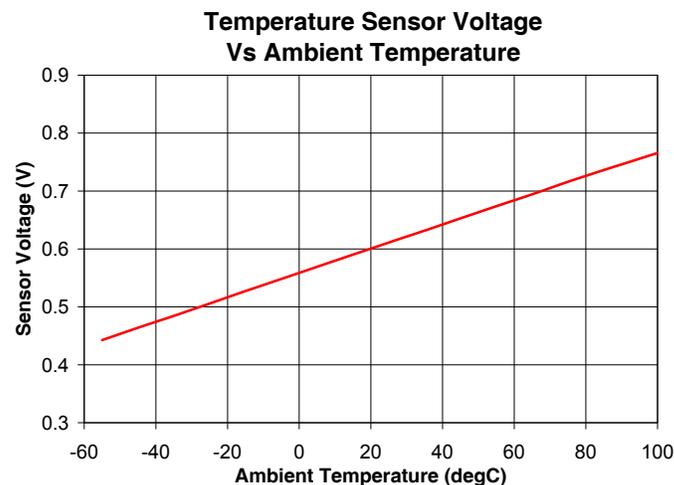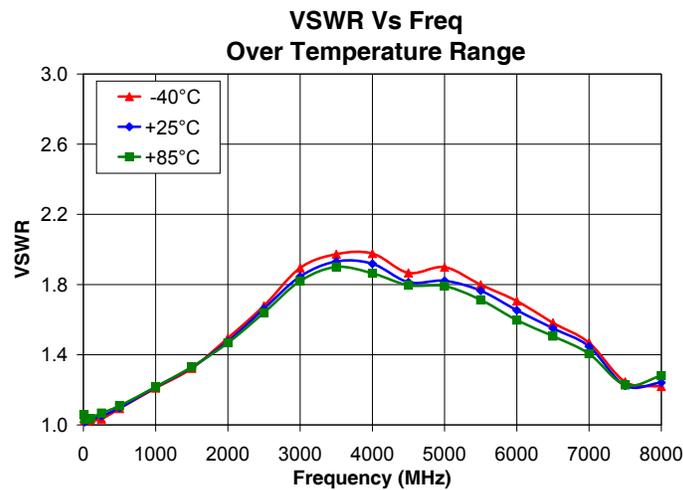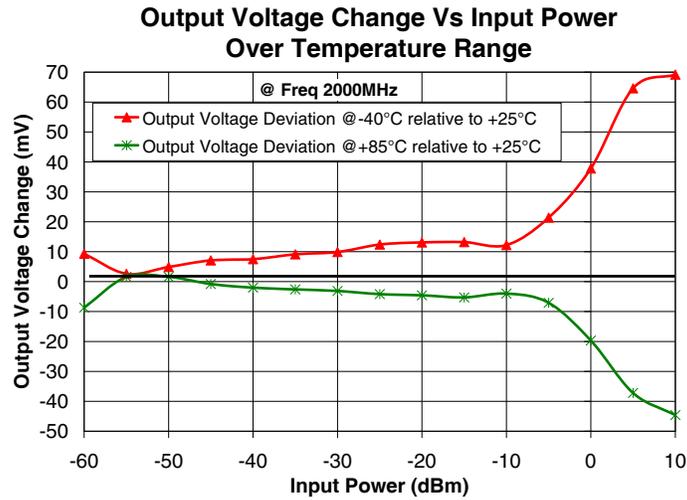

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Power Detector

ZX47-60+

Typical Performance Data

| Output Voltage vs. Input Power @+25°C | | | | | | |
|---------------------------------------|------------|--------------|--------------|--------------|--------------|--------------|
| POWER IN (dBm) | @10MHz (V) | @1000MHz (V) | @2000MHz (V) | @5000MHz (V) | @6000MHz (V) | @8000MHz (V) |
| -60 | 2.04 | 2.05 | 2.03 | 2.08 | 2.09 | 2.11 |
| -55 | 1.96 | 1.96 | 1.93 | 1.99 | 2.03 | 2.08 |
| -50 | 1.86 | 1.85 | 1.81 | 1.87 | 1.93 | 2.02 |
| -45 | 1.75 | 1.73 | 1.69 | 1.74 | 1.82 | 1.93 |
| -40 | 1.64 | 1.61 | 1.57 | 1.61 | 1.69 | 1.82 |
| -35 | 1.52 | 1.49 | 1.44 | 1.49 | 1.57 | 1.70 |
| -30 | 1.40 | 1.36 | 1.32 | 1.36 | 1.45 | 1.59 |
| -25 | 1.27 | 1.24 | 1.20 | 1.24 | 1.32 | 1.47 |
| -20 | 1.15 | 1.12 | 1.08 | 1.12 | 1.20 | 1.36 |
| -15 | 1.02 | 0.99 | 0.95 | 1.00 | 1.08 | 1.24 |
| -10 | 0.89 | 0.86 | 0.82 | 0.87 | 0.96 | 1.12 |
| -5 | 0.76 | 0.73 | 0.69 | 0.74 | 0.83 | 1.00 |
| 0 | 0.65 | 0.62 | 0.59 | 0.63 | 0.71 | 0.87 |
| 5 | 0.57 | 0.55 | 0.53 | 0.54 | 0.60 | 0.76 |
| 10 | 0.53 | 0.52 | 0.53 | 0.53 | 0.56 | 0.66 |

| Output Voltage Change Vs Freq | | | | | | |
|-------------------------------|----------------------|--------|--------|----------------------|-------|-------|
| FREQ (MHz) | @ Input Power -5 dBm | | | @ Input Power -50dBm | | |
| | -40°C | +25°C | +85°C | -40°C | +25°C | +85°C |
| 10 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 50 | -0.39 | -0.29 | -0.34 | 0.55 | 0.67 | 0.68 |
| 250 | -1.14 | -1.19 | -1.39 | 0.50 | 0.62 | 0.61 |
| 500 | -1.99 | -2.25 | -2.60 | 0.05 | 0.31 | 0.39 |
| 1000 | -3.26 | -3.86 | -4.38 | -0.78 | -0.52 | -0.35 |
| 1500 | -5.65 | -6.61 | -7.30 | -1.56 | -1.42 | -1.21 |
| 2000 | -7.48 | -9.02 | -9.87 | -2.89 | -2.82 | -2.68 |
| 2500 | -9.61 | -11.57 | -12.72 | -4.08 | -4.12 | -4.19 |
| 3000 | -11.46 | -14.11 | -15.81 | -4.86 | -4.96 | -5.15 |
| 3500 | -12.06 | -14.51 | -16.10 | -5.08 | -5.08 | -5.24 |
| 4000 | -8.09 | -10.61 | -11.41 | -2.45 | -2.50 | -2.55 |
| 4500 | -7.86 | -10.10 | -10.85 | -2.37 | -2.67 | -2.91 |
| 5000 | -1.38 | -2.49 | -2.62 | 0.65 | 0.42 | -0.15 |
| 5500 | 4.19 | 3.77 | 4.10 | 2.51 | 2.13 | 1.67 |
| 6000 | 9.07 | 9.18 | 9.77 | 4.09 | 3.85 | 3.63 |
| 6500 | 13.05 | 13.29 | 14.22 | 5.93 | 5.41 | 4.73 |
| 7000 | 18.10 | 18.81 | 20.33 | 7.13 | 6.26 | 5.29 |
| 7500 | 23.34 | 24.47 | 26.81 | 7.80 | 6.88 | 6.18 |
| 8000 | 28.91 | 30.88 | 34.58 | 9.09 | 8.35 | 7.88 |



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCStore/terms.jsp.

Power Detector

ZX47-60+

Typical Performance Data

| Sensitivity vs. Input Power @+25°C | | | | | | |
|------------------------------------|--------------------|--------|---------------------|--------------------|--------|---------------------|
| Measured | @10MHz(mV/dB) | | | @2000MHz(mV/dB) | | |
| | Output Voltage (V) | Ideal | Deviation from idea | Output Voltage (V) | Ideal | Deviation from idea |
| -60 | 2.04 | -57.65 | -2.35 | 2.03 | -60.00 | 0.00 |
| -55 | 1.96 | -54.25 | -0.75 | 1.93 | -55.76 | 0.76 |
| -50 | 1.86 | -50.00 | 0.00 | 1.81 | -50.65 | 0.65 |
| -45 | 1.75 | -45.44 | 0.44 | 1.69 | -45.62 | 0.62 |
| -40 | 1.64 | -40.58 | 0.58 | 1.57 | -40.55 | 0.55 |
| -35 | 1.52 | -35.61 | 0.61 | 1.44 | -35.43 | 0.43 |
| -30 | 1.40 | -30.56 | 0.56 | 1.32 | -30.32 | 0.32 |
| -25 | 1.27 | -25.43 | 0.43 | 1.20 | -25.13 | 0.13 |
| -20 | 1.15 | -20.28 | 0.28 | 1.08 | -20.15 | 0.15 |
| -15 | 1.02 | -15.00 | 0.00 | 0.95 | -15.00 | 0.00 |
| -10 | 0.89 | -9.64 | -0.36 | 0.82 | -9.62 | -0.38 |
| -5 | 0.76 | -4.19 | -0.81 | 0.69 | -4.21 | -0.79 |
| 0 | 0.65 | 0.62 | -0.62 | 0.59 | 0.23 | -0.23 |
| 5 | 0.57 | 3.98 | 1.02 | 0.53 | 2.71 | 2.29 |
| 10 | 0.53 | 5.62 | 4.38 | 0.53 | 2.78 | 7.22 |

| Sensitivity vs. Input Power @+25°C | | | | | | |
|------------------------------------|--------------------|--------|---------------------|--------------------|--------|---------------------|
| Measured | @6000MHz(mV/dB) | | | @8000MHz(mV/dB) | | |
| | Output Voltage (V) | Ideal | Deviation from idea | Output Voltage (V) | Ideal | Deviation from idea |
| -60 | 2.09 | -57.50 | -2.50 | 2.11 | -52.78 | -7.22 |
| -55 | 2.03 | -55.00 | 0.00 | 2.08 | -51.42 | -3.58 |
| -50 | 1.93 | -50.84 | 0.84 | 2.02 | -48.78 | -1.22 |
| -45 | 1.82 | -45.89 | 0.89 | 1.93 | -45.00 | 0.00 |
| -40 | 1.69 | -40.79 | 0.79 | 1.82 | -40.43 | 0.43 |
| -35 | 1.57 | -35.51 | 0.51 | 1.70 | -35.48 | 0.48 |
| -30 | 1.45 | -30.29 | 0.29 | 1.59 | -30.50 | 0.50 |
| -25 | 1.32 | -25.12 | 0.12 | 1.47 | -25.54 | 0.54 |
| -20 | 1.20 | -20.00 | 0.00 | 1.36 | -20.77 | 0.77 |
| -15 | 1.08 | -14.93 | -0.07 | 1.24 | -15.94 | 0.94 |
| -10 | 0.96 | -9.58 | -0.42 | 1.12 | -10.83 | 0.83 |
| -5 | 0.83 | -4.43 | -0.57 | 1.00 | -5.54 | 0.54 |
| 0 | 0.71 | 0.90 | -0.90 | 0.87 | 0.00 | 0.00 |
| 5 | 0.60 | 5.33 | -0.33 | 0.76 | 4.73 | 0.27 |
| 10 | 0.56 | 7.34 | 2.66 | 0.66 | 8.82 | 1.18 |



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp.

Power Detector

ZX47-60+

Typical Performance Data

| POWER IN (dBm) | Slope Vs Input Power Over Temperature | | | | | | | | |
|-------------------|---------------------------------------|--------|--------|----------------------|--------|--------|----------------------|--------|--------|
| | Range @ Freq 10MHz | | | Range @ Freq 5000MHz | | | Range @ Freq 8000MHz | | |
| | -40°C | +25°C | +85°C | -40°C | +25°C | +85°C | -40°C | +25°C | +85°C |
| -60 | -17.66 | -16.30 | -14.84 | -18.30 | -16.78 | -15.18 | -7.24 | -6.38 | -5.06 |
| -55 | -20.66 | -20.36 | -19.60 | -24.70 | -24.54 | -23.94 | -13.46 | -12.42 | -10.76 |
| -50 | -21.98 | -21.82 | -21.52 | -25.02 | -25.52 | -24.92 | -18.30 | -17.78 | -16.80 |
| -45 | -23.32 | -23.30 | -22.90 | -25.88 | -25.48 | -24.90 | -21.98 | -21.50 | -20.82 |
| -40 | -23.78 | -23.82 | -23.82 | -24.86 | -24.82 | -24.52 | -24.04 | -23.26 | -21.98 |
| -35 | -24.18 | -24.16 | -24.52 | -25.16 | -25.24 | -24.90 | -24.32 | -23.44 | -22.08 |
| -30 | -24.82 | -24.58 | -24.96 | -24.78 | -24.80 | -24.70 | -23.84 | -23.34 | -22.12 |
| -25 | -24.48 | -24.68 | -24.56 | -23.60 | -24.12 | -24.24 | -22.88 | -22.42 | -21.46 |
| -20 | -24.78 | -25.28 | -25.24 | -24.80 | -24.52 | -24.14 | -23.16 | -22.74 | -22.20 |
| -15 | -25.84 | -25.68 | -25.68 | -24.74 | -25.06 | -25.36 | -24.26 | -24.04 | -23.60 |
| -10 | -25.46 | -26.12 | -26.18 | -24.36 | -25.24 | -25.14 | -25.06 | -24.84 | -24.86 |
| -5 | -20.78 | -23.02 | -22.84 | -20.16 | -23.08 | -25.26 | -23.36 | -26.08 | -26.60 |
| 0 | -11.34 | -16.08 | -19.04 | -12.08 | -16.84 | -19.64 | -21.72 | -22.26 | -25.18 |
| 5 | -6.88 | -7.86 | -11.06 | 0.58 | -2.74 | -6.38 | -22.98 | -19.24 | -18.64 |

| FREQ (MHz) | Slope Vs Freq Over Temperature Range | | | | | | | | |
|---------------|--------------------------------------|--------|--------|----------------------|--------|--------|---------------------|--------|--------|
| | @ Input Power -50dBm | | | @ Input Power -25dBm | | | @ Input Power -5dBm | | |
| | -40°C | +25°C | +85°C | -40°C | +25°C | +85°C | -40°C | +25°C | +85°C |
| 10 | -21.98 | -21.82 | -21.52 | -24.48 | -24.68 | -24.56 | -20.78 | -23.02 | -22.84 |
| 250 | -23.50 | -23.24 | -22.76 | -24.26 | -24.38 | -24.54 | -20.56 | -23.42 | -24.90 |
| 500 | -23.70 | -23.74 | -23.36 | -24.38 | -24.34 | -24.50 | -20.20 | -23.10 | -24.68 |
| 1000 | -23.74 | -24.14 | -24.20 | -24.14 | -24.42 | -24.66 | -19.34 | -22.64 | -24.36 |
| 1500 | -24.54 | -24.82 | -25.24 | -24.50 | -24.48 | -24.64 | -17.22 | -21.08 | -23.34 |
| 2000 | -23.68 | -24.12 | -24.60 | -23.76 | -23.90 | -23.98 | -17.98 | -21.26 | -23.78 |
| 2500 | -23.96 | -23.98 | -23.88 | -23.82 | -24.04 | -24.14 | -15.38 | -19.58 | -22.40 |
| 3000 | -24.10 | -24.02 | -23.84 | -24.00 | -24.02 | -24.08 | -13.78 | -18.06 | -21.12 |
| 3500 | -23.86 | -24.02 | -24.62 | -24.30 | -24.28 | -24.26 | -13.88 | -18.20 | -21.12 |
| 4000 | -25.14 | -24.44 | -23.24 | -24.94 | -25.16 | -25.38 | -16.40 | -19.98 | -23.06 |
| 4500 | -24.58 | -24.52 | -24.58 | -24.42 | -24.48 | -24.60 | -17.66 | -20.68 | -22.96 |
| 5000 | -25.02 | -25.52 | -24.92 | -23.60 | -24.12 | -24.24 | -20.16 | -23.08 | -25.26 |
| 5500 | -24.40 | -24.60 | -24.06 | -23.82 | -24.22 | -23.90 | -21.60 | -24.50 | -26.20 |
| 6000 | -23.46 | -23.42 | -22.88 | -24.28 | -24.26 | -23.64 | -22.58 | -25.20 | -26.22 |
| 6500 | -23.38 | -23.20 | -22.80 | -24.34 | -24.40 | -23.78 | -23.02 | -25.40 | -26.20 |
| 7000 | -22.84 | -22.40 | -21.12 | -24.40 | -24.10 | -23.24 | -23.60 | -25.74 | -26.24 |
| 7500 | -20.44 | -19.54 | -18.38 | -22.70 | -22.50 | -21.64 | -23.40 | -25.76 | -26.30 |
| 8000 | -18.30 | -17.78 | -16.80 | -22.88 | -22.42 | -21.46 | -23.36 | -26.08 | -26.60 |



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 *The Design Engineers Search Engine* Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCIStore/terms.jsp.

REV. OR

ZX47-60+

130512

Page 3 of 4

Power Detector

ZX47-60+

Typical Performance Data

| Output Voltage Change Vs Input Power | | |
|--------------------------------------|---|---|
| POWER IN (dBm) | Output Voltage Deviation @-40°C relative to +25°C | Output Voltage Deviation @+85°C relative to +25°C |
| -60 | 9.30 | -8.70 |
| -55 | 2.60 | 1.60 |
| -50 | 4.90 | 1.60 |
| -45 | 7.10 | -0.80 |
| -40 | 7.50 | -2.00 |
| -35 | 9.10 | -2.60 |
| -30 | 9.90 | -3.10 |
| -25 | 12.40 | -4.20 |
| -20 | 13.10 | -4.60 |
| -15 | 13.20 | -5.30 |
| -10 | 12.20 | -4.00 |
| -5 | 21.40 | -7.10 |
| 0 | 37.80 | -19.70 |
| 5 | 64.60 | -37.20 |
| 10 | 69.20 | -44.60 |

| VSWR Vs Freq | | | |
|--------------|--------|--------|--------|
| FREQ (MHz) | -40dBm | +25dBm | +85dBm |
| 10 | 1.04 | 1.05 | 1.06 |
| 20 | 1.02 | 1.02 | 1.03 |
| 50 | 1.02 | 1.02 | 1.03 |
| 100 | 1.03 | 1.03 | 1.04 |
| 250 | 1.03 | 1.05 | 1.07 |
| 500 | 1.09 | 1.10 | 1.11 |
| 1000 | 1.21 | 1.21 | 1.22 |
| 1500 | 1.32 | 1.33 | 1.33 |
| 2000 | 1.49 | 1.48 | 1.47 |
| 2500 | 1.68 | 1.66 | 1.64 |
| 3000 | 1.89 | 1.85 | 1.82 |
| 3500 | 1.97 | 1.93 | 1.90 |
| 4000 | 1.98 | 1.92 | 1.86 |
| 4500 | 1.87 | 1.81 | 1.80 |
| 5000 | 1.90 | 1.82 | 1.79 |
| 5500 | 1.80 | 1.77 | 1.71 |
| 6000 | 1.71 | 1.65 | 1.60 |
| 6500 | 1.58 | 1.55 | 1.51 |
| 7000 | 1.47 | 1.45 | 1.41 |
| 7500 | 1.25 | 1.22 | 1.23 |
| 8000 | 1.22 | 1.24 | 1.28 |

| Temperature Sensor Voltage Vs Ambient | |
|---------------------------------------|-------------------|
| Temp (°C) | Voltage @ 8000MHz |
| -55 | 0.44 |
| -45 | 0.46 |
| -35 | 0.48 |
| -25 | 0.51 |
| -15 | 0.53 |
| 0 | 0.56 |
| 10 | 0.58 |
| 20 | 0.60 |
| 27 | 0.62 |
| 35 | 0.63 |
| 45 | 0.65 |
| 55 | 0.67 |
| 65 | 0.69 |
| 75 | 0.72 |
| 85 | 0.74 |
| 100 | 0.77 |



ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchase of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCIStore/terms.jsp.


REV. OR
ZX47-60+
130512
Page 4 of 4

Power Detector


ZX47-60+

Typical Performance Curves


Output Power vs. Input Power @+25°C

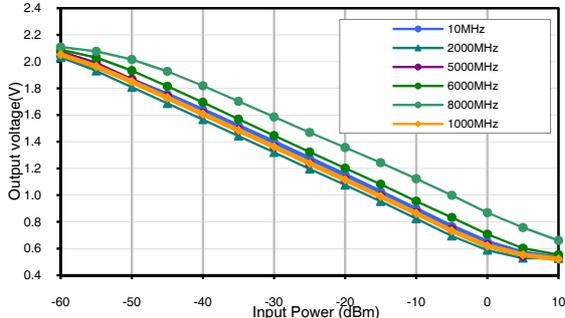


Sensitivity vs. Input Power +25°C
Output Voltage@Freg 10MHz

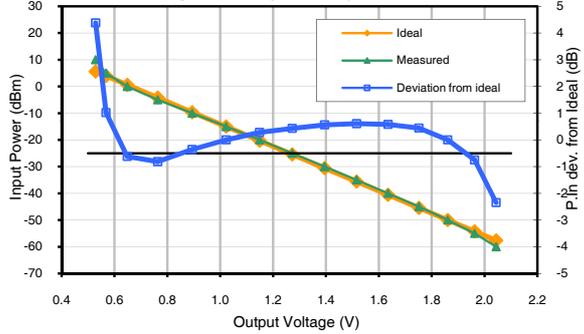


Sensitivity vs. Input Power +25°C
Output Voltage@Freg 2000MHz

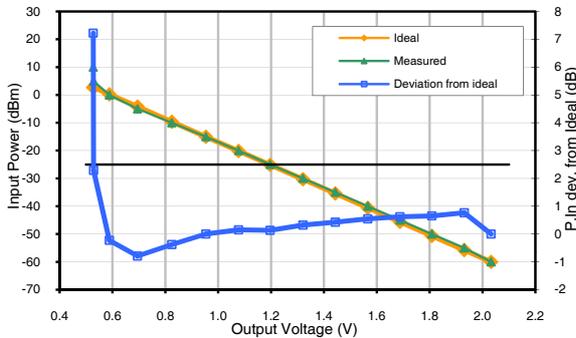


Sensitivity vs. Input Power @+25°C
Output Voltage@Freg 6000MHz

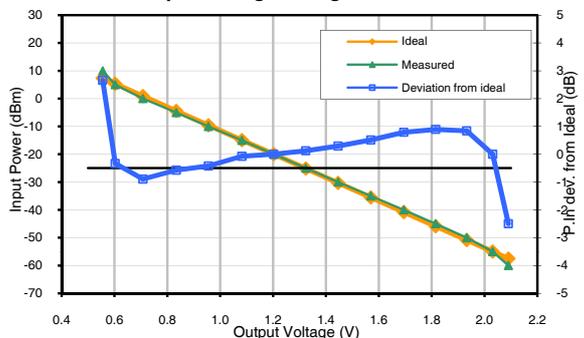


Sensitivity vs. Input Power @+25°C
Output Voltage@Freg 8000MHz

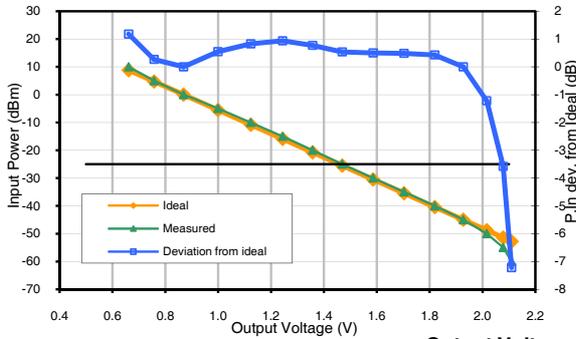

Output Voltage Change Vs Freq
Over Temperature Range

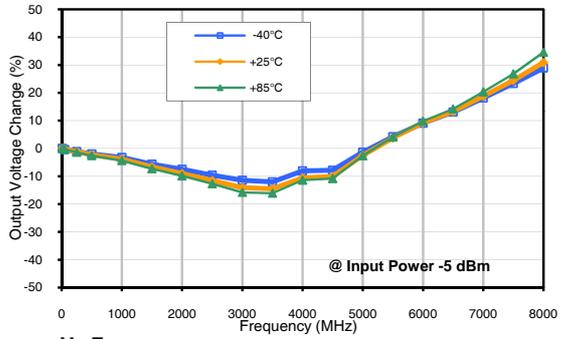

Output Voltage Change Vs Freq
Over Temperature Range

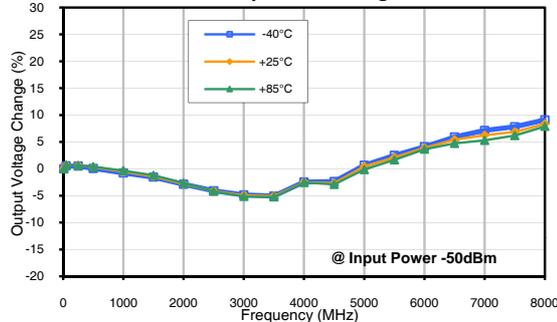

ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits' applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchase of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MC_Store/terms.jsp.

REV. OR

ZX47-60+

130512


Page 1 of 3

Power Detector


ZX47-60+

Typical Performance Curves


Slope Vs Input Power Over Temperature Range @ Freq 10MHz

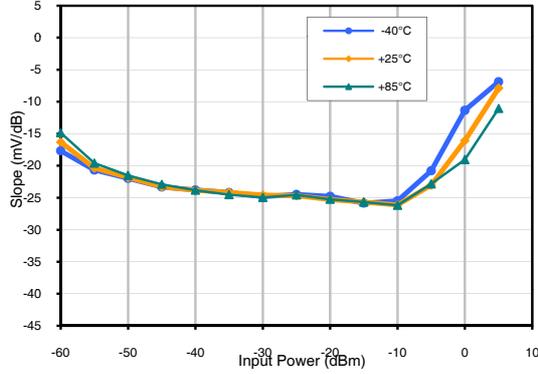


Slope Vs Freq Over Temperature Range @ Input Power -50dBm

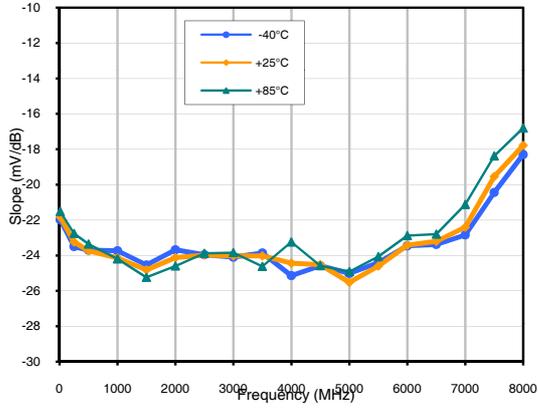


Slope Vs Input Power Over Temperature Range @ Freq 5000MHz

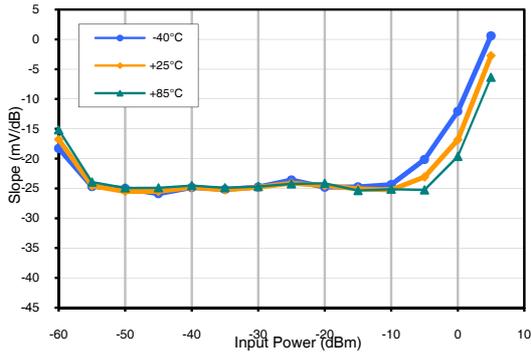


Slope Vs Freq Over Temperature Range @ Input Power -25dBm

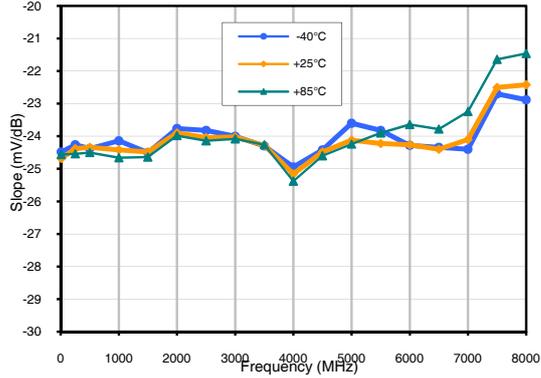

Slope Vs Input Power Over Temperature Range @ Freq 8000MHz

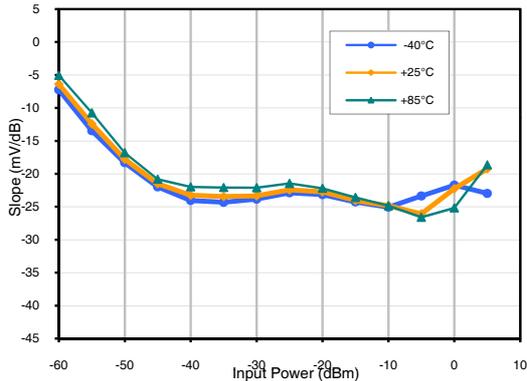

Slope Vs Freq Over Temperature Range @ Input Power -5dBm

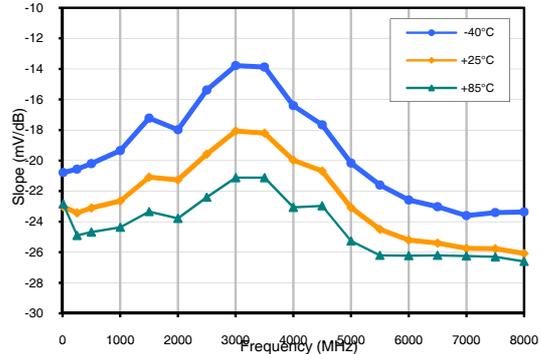

ISO 9001 ISO 14001 AS 9100 CERTIFIED

For detailed performance specs & shopping online see web site


P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS


Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits' applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCIStore/terms.jsp.

Typical Performance Curves


Output Voltage Change Vs Input Power Over Temperature Range

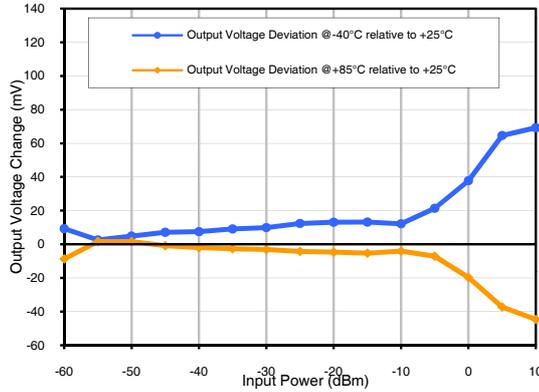

VSWR Vs Freq Over Temperature Range

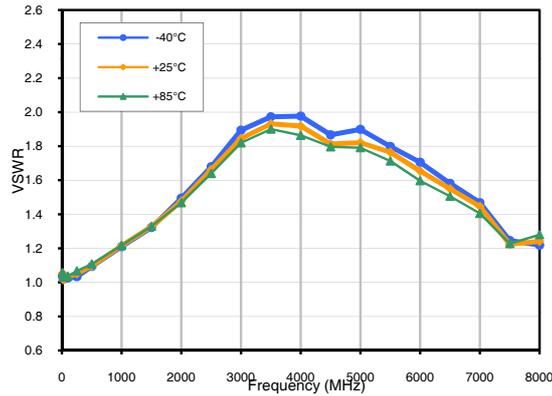

Temperature Sensor Voltage Vs Ambient Temperature

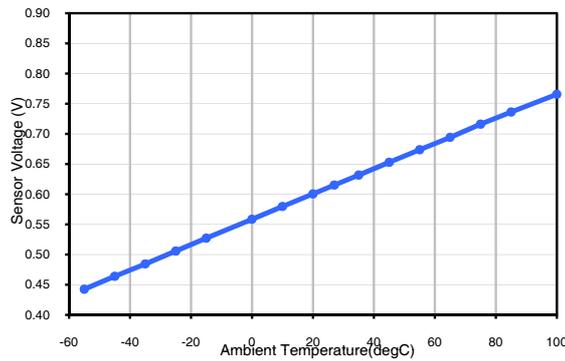

ISO 9001 ISO 14001 AS 9100 CERTIFIED

For detailed performance specs & shipping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS


Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MC_Store/terms.jsp.

Case Style

HN

Outline Dimensions

HN1173

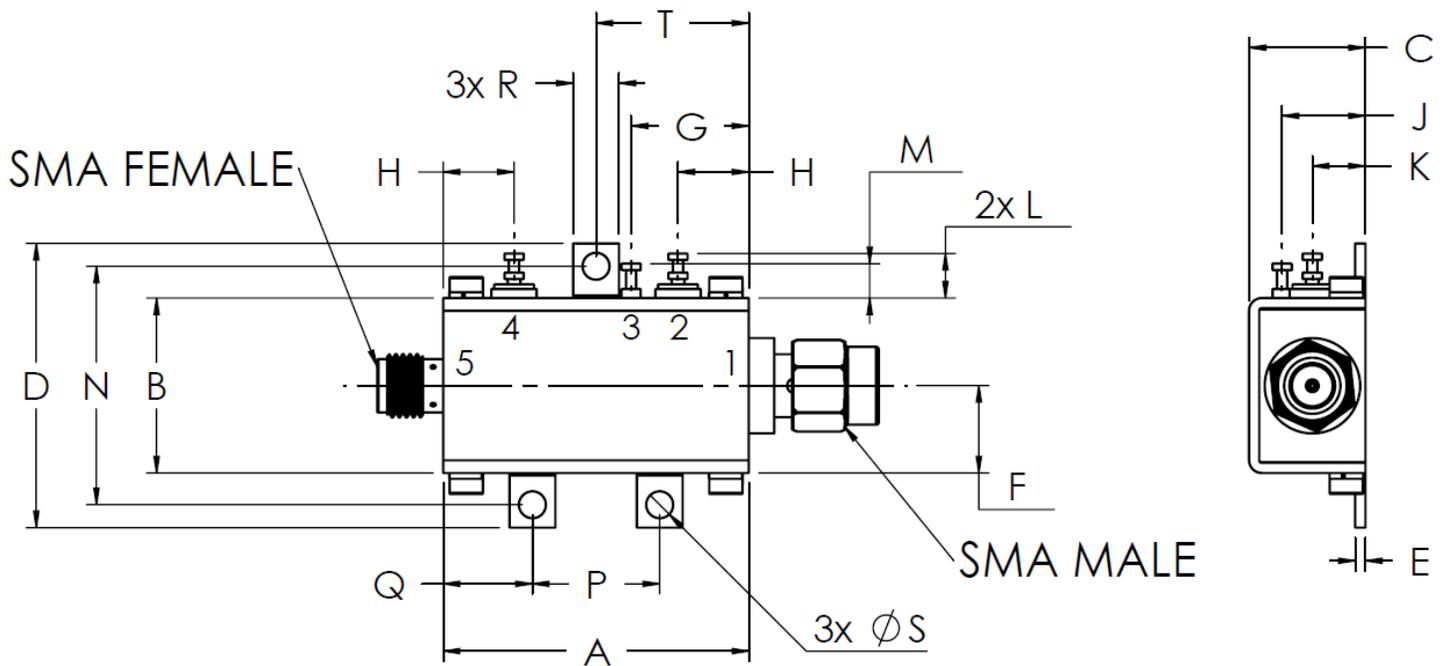

| CASE #. | A | B | C | D | E | F | G | H | J | K | L | M | N |
|---------|-----------------|----------------|----------------|-----------------|---------------|---------------|----------------|---------------|---------------|---------------|---------------|---------------|----------------|
| HN1173 | 1.20 (30.48) | .69 (17.53) | .46 (11.68) | 1.12 (28.45) | .04 (1.02) | .34 (8.64) | .46 (11.68) | .28 (7.11) | .35 (8.89) | .21 (5.28) | .18 (4.57) | .14 (3.56) | .94 (23.88) |

| CASE #. | P | Q | R | S | T | WT GRAMS |
|---------|----------------|---------------|---------------|----------------|----------------|----------|
| HN1173 | .50 (12.70) | .35 (8.89) | .18 (4.57) | .106 (2.69) | .60 (15.24) | 31.8 |

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .03$; 3Pl. $\pm .015$
Tolerance on hole size and interaxes dimensions to be $\pm .005$.

Note:

1. Case material: Brass
2. Case finish: Nickel plate

Mini-Circuits[®]

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

| Specification | Test/Inspection Condition | Reference/Spec |
|----------------------------|--|--------------------------------------|
| Operating Temperature | -40° to 85°C | Individual Model Data Sheet |
| Storage Temperature | -55° to 100° C Ambient Environment | Individual Model Data Sheet |
| Barometric Pressure | 100,000 Feet | MIL-STD-202, Method 105, Condition D |
| Humidity | 90% RH, 65°C Units may require bake-out after humidity to restore full performance. | MIL-STD-202, Method 103 |
| Thermal Shock | -65° to 125°C, 5 cycles | MIL-STD-202, Method 107, Condition B |
| Vibration (High Frequency) | 20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36) | MIL-STD-202, Method 204, Condition D |
| Mechanical Shock | 100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18) | MIL-STD-202, Method 213, Condition I |