

Coaxial

Low Noise Amplifier

ZX60-542LN+

50Ω 4400 to 5400 MHz

Features

- low noise figure, 1.9 dB typ.
- output power, up to 10 dBm typ.
- reverse polarity protection

Applications

- front-end amplifier
- Satellite TV
- public safety
- astronomy
- weather
- defense & radar
- instrumentation
- test equipment



CASE STYLE: GA955

Connectors	Model
SMA	ZX60-542LN-S+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications $T_{AMB}=25^{\circ}C$


MODEL NO.	FREQUENCY (MHz)	DC VOLTS (V)	NOISE FIGURE (dB)		GAIN (dB)				MAXIMUM POWER (dBm)			3rd ORDER INTERCEPT POINT AT OUTPUT (dBm)	VSWR (:1) Typ.		DC OPERATING CURRENT @ Pin V+ (mA)	
			Typ.	Max.	Typ.	Min.	Flatness		Output (1 dB Compr.)		Input (no damage)		In	Out	Typ.	Max.
							Typ.	Max.	Typ.	Min.						
ZX60-542LN+	4400-5400	12.0	1.9	3.0	24	22	±0.3	±0.8	10	8	+13	23	1.5	1.5	60	80

Maximum Ratings

Operating Temperature	-40°C to 85°C case
Storage Temperature	-55°C to 100°C
DC Voltage	+13V
Power	0.96W

Permanent damage may occur if any of these limits are exceeded.

Outline Drawing

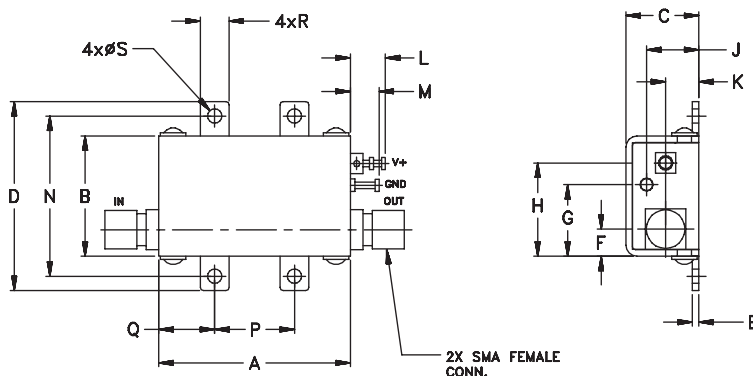

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	wt
1.20	.75	.46	1.18	.04	.17	.45	.59	.33	.21	.22	.18	1.00	.50	.35	.18	.09	grams
30.48	19.05	11.68	29.97	1.02	4.32	11.43	14.99	8.38	5.33	5.59	4.57	25.40	12.70	8.89	4.57	2.29	35.00

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp










www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M151107
ZX60-542LN+
ED-13494/4
MR/MM/CP
161031
Page 1 of 2

Typical Performance Data/Curves

ZX60-542LN+

FREQUENCY (MHz)	GAIN (dB)	DIRECTIVITY (dB)	VSWR IN (:1)	VSWR OUT (:1)	NOISE FIGURE (dB)	POUT at 1dB COMPR. (dBm)	IP3 (dBm)
4400.0	24.83	34.58	1.68	1.57	1.81	9.80	22.57
4500.0	24.80	35.55	1.56	1.52	1.80	9.72	23.78
4600.0	24.78	31.78	1.44	1.46	1.79	9.68	23.55
4700.0	24.75	32.27	1.34	1.39	1.79	10.02	23.62
4800.0	24.68	40.43	1.24	1.33	1.83	9.99	23.45
4900.0	24.57	37.39	1.14	1.27	1.81	9.76	23.61
5000.0	24.43	35.91	1.06	1.25	1.86	9.73	23.48
5100.0	24.35	31.03	1.05	1.30	1.91	9.98	23.61
5200.0	24.35	41.27	1.15	1.37	1.96	10.43	23.73
5300.0	24.30	33.52	1.26	1.42	2.02	10.70	24.21
5400.0	24.20	34.70	1.40	1.48	2.08	10.66	23.93

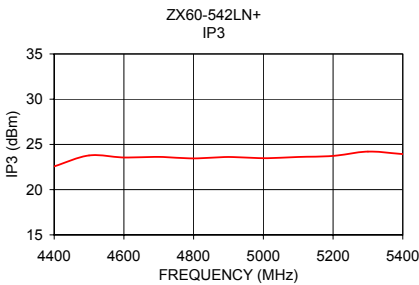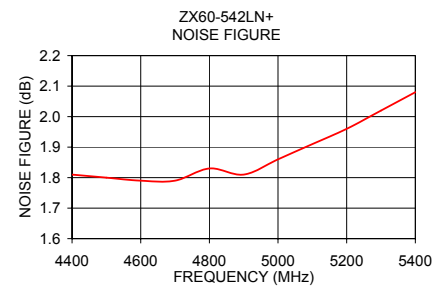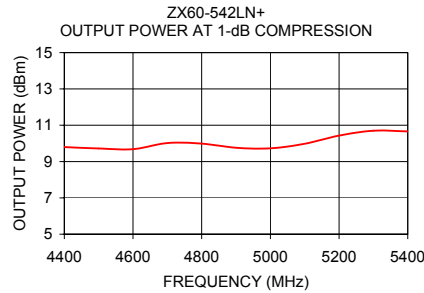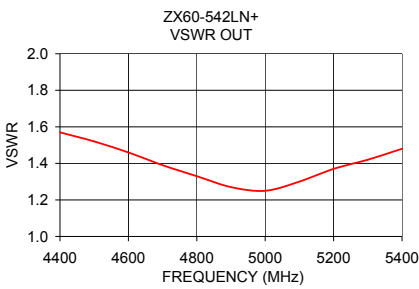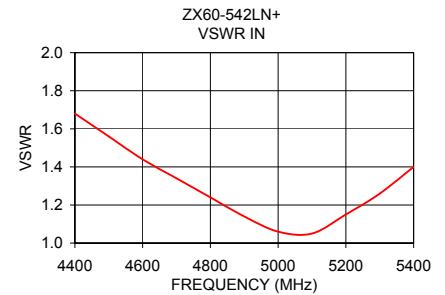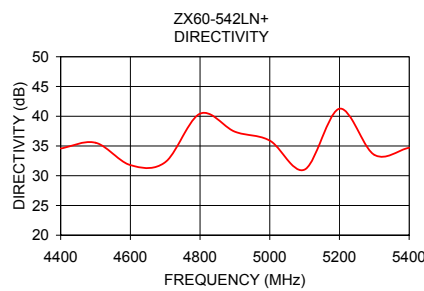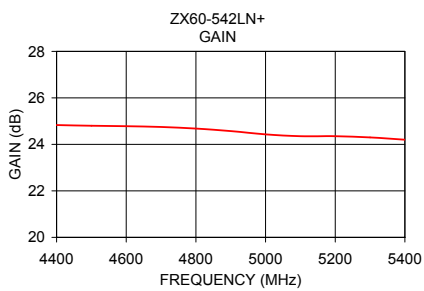

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Coaxial

Low Noise Amplifier

ZX60-542LN-S+

Typical Performance Data

FREQUENCY (MHz)	Gain (dB) 12V	Directivity (dB) 12V	VSWR IN (:1) 12V	VSWR OUT (:1) 12V	Noise Figure (dB) 12V	Pout @ 1dB Compression (dBm) 12V	Output IP3 (dBm) 12V
4000	24.96	39.46	2.29	1.70	1.93	9.43	22.51
4100	24.92	34.62	2.12	1.68	1.87	9.50	22.60
4200	24.86	34.98	1.96	1.65	1.84	9.61	23.15
4300	24.84	31.14	1.82	1.61	1.81	9.66	23.15
4400	24.83	34.58	1.68	1.57	1.81	9.80	22.57
4500	24.80	35.55	1.56	1.52	1.80	9.72	23.78
4600	24.78	31.78	1.44	1.46	1.79	9.68	23.55
4700	24.75	32.27	1.34	1.39	1.79	10.02	23.62
4800	24.68	40.43	1.24	1.33	1.83	9.99	23.45
4900	24.57	37.39	1.14	1.27	1.81	9.76	23.61
5000	24.43	35.91	1.06	1.25	1.86	9.73	23.48
5100	24.35	31.03	1.05	1.30	1.91	9.98	23.61
5200	24.35	41.27	1.15	1.37	1.96	10.43	23.73
5300	24.30	33.52	1.26	1.42	2.02	10.70	24.21
5400	24.20	34.70	1.40	1.48	2.08	10.66	23.93
5500	24.04	34.54	1.57	1.54	2.19	10.78	24.05
5600	23.85	30.86	1.75	1.59	2.26	10.80	23.97
5700	23.59	30.84	1.96	1.62	2.32	10.85	23.90
5800	23.31	32.98	2.19	1.65	2.36	10.79	23.86



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com









IF/RF MICROWAVE COMPONENTS

REV. OR
ZX60-542LN-S+
12/13/2018
Page 1 of 1

Coaxial Low Noise Amplifier

ZX60-542LN-S+

Typical Performance Curves

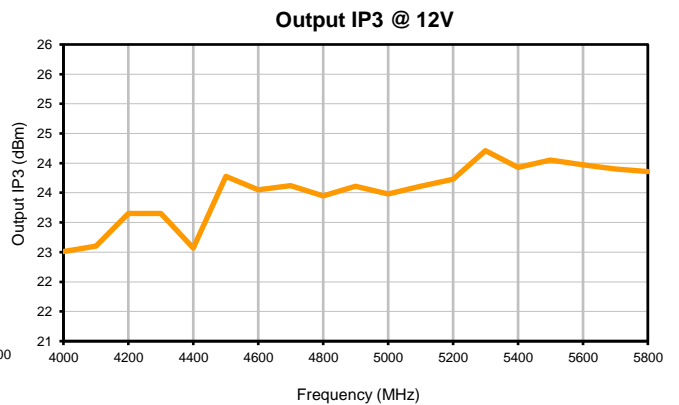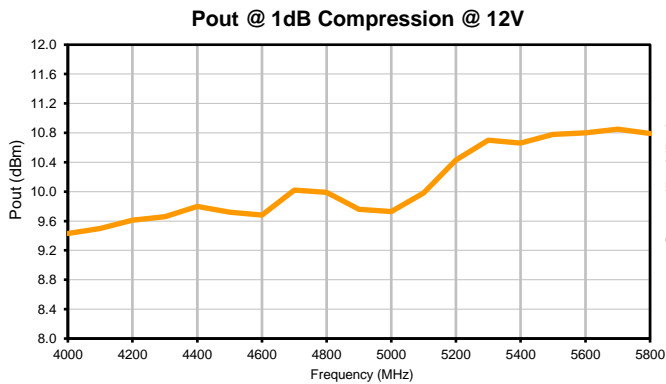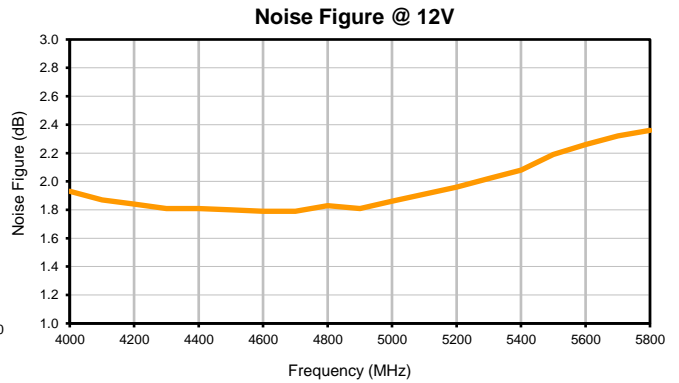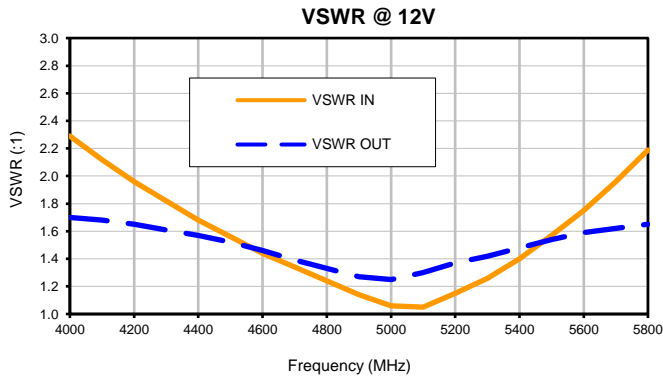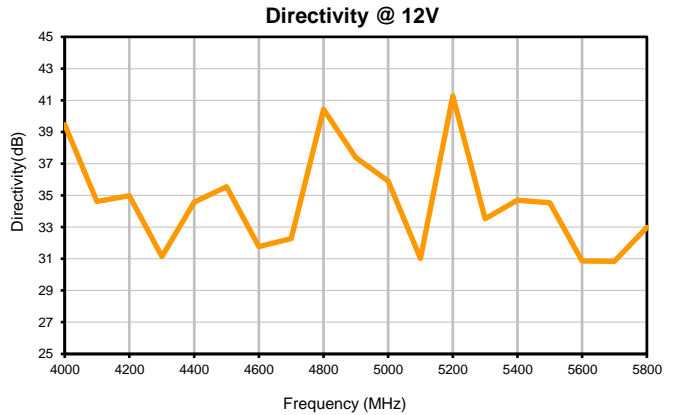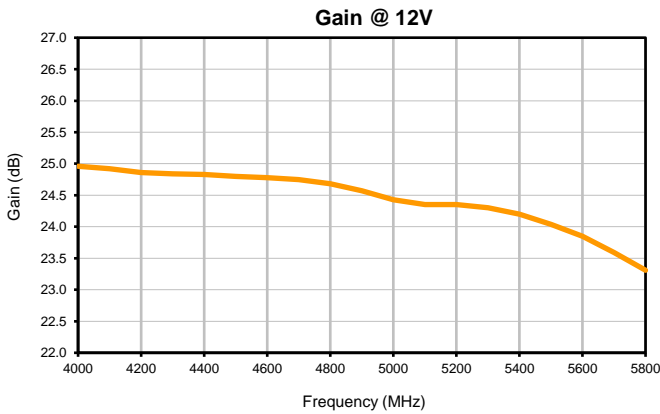

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
 The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com



IF/RF MICROWAVE COMPONENTS


REV. OR
 ZX60-542LN-S+
 12/13/2018
 Page 1 of 1

Case Style

GA

Outline Dimensions

GA955

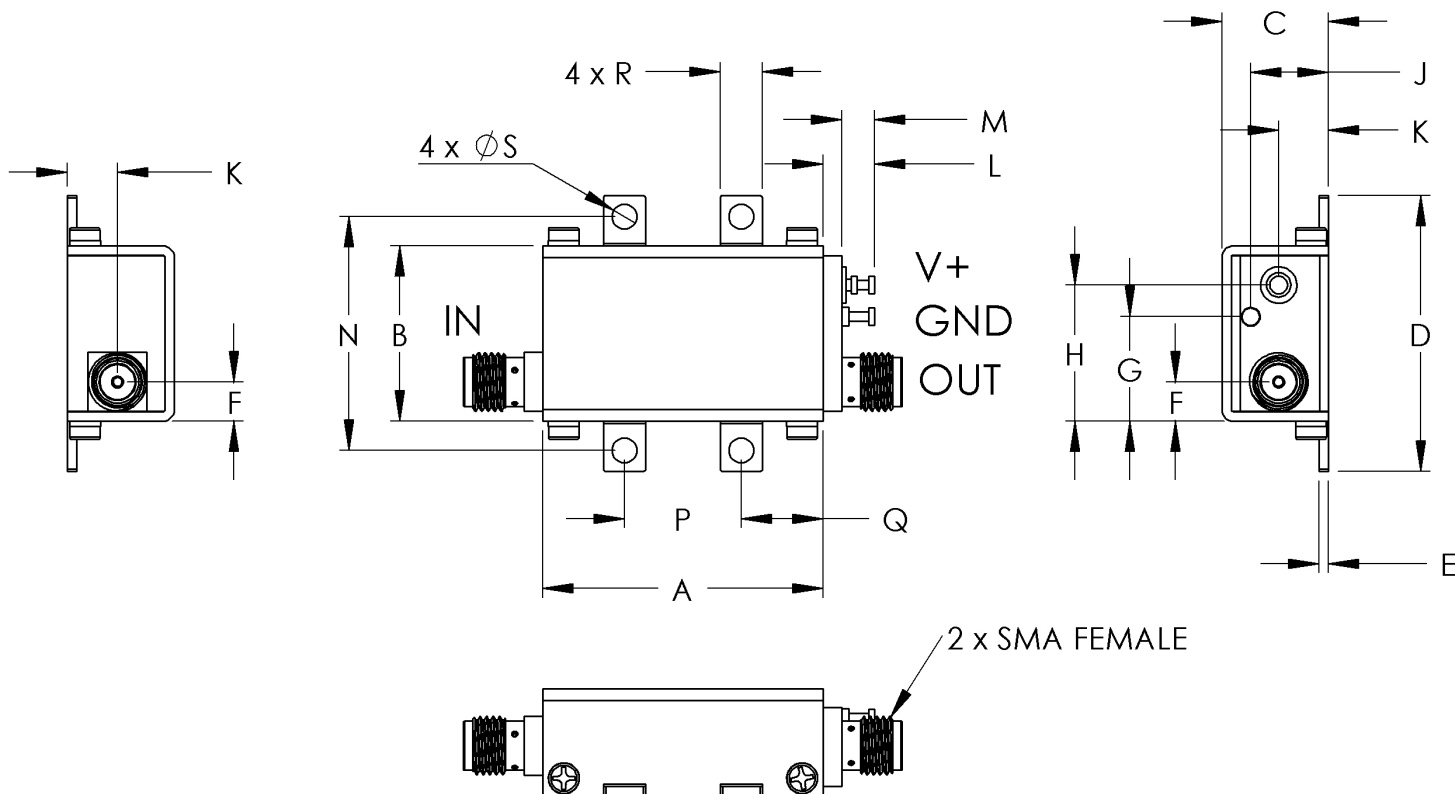

CASE #.	A	B	C	D	E	F	G	H	J	K	L	M	N
GA955	1.20 (30.48)	.75 (19.05)	.46 (11.61)	1.18 (29.97)	.04 (1.02)	.17 (4.27)	.45 (11.35)	.58 (14.81)	.33 (8.46)	.21 (5.44)	.22 (5.59)	.14 (3.56)	1.000 (25.4)

CASE #.	P	Q	R	S	WT GRAMS
GA955	.500 (12.70)	.35 (8.89)	.18 (4.57)	.106 (2.69)	35.0

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .03$; 3Pl. $\pm .015$
Tolerance on hole size and interaxes dimensions to be $\pm .005$.

Note:

1. Case material: Brass
2. Case finish: Nickel plate

Mini-Circuits[®]

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85° C Case Temperature	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Stabilization Bake	(non-operating) 125°C, 24 hours	- - -
Burn-in at Elevated Temp.	(DC on) 160 hours at 85° C	MIL-STD-202, Method 108
Thermal Shock	-55° to 100°C, 5 cycles	MIL-STD-202, Method 107, Condition A, except 100°C