Coaxial

Diplexer

ZX75-2R15-S+

50Ω DC to 2150 MHz (DC-20, 950-2150 MHz)

Generic photo used for illustration purposes only
CASE STYLE: FL905

The Big Deal

- Low insertion loss
- High Rejection
- Connectorized package

Product Overview

ZX75-2R15-S+ is a low-pass + high-pass combination device. Low pass port is designed for DC to 20 MHz and high pass port is designed for 950 to 2150 MHz. This diplexer is used to pass IF, pilot carrier or clock synchronizing signal. This diplexer can also be used in automotive electronics, satellite systems, point-to-point radios, and multiband radio systems.

Key Features

Feature	Advantages
Low passband insertion loss	Suitable for high performance application.
Extended stopband rejection	Spurious rejection and avoids using additional filters.
Connectorized package	The connectorized package is easy to interface with other devices and well suited for test setups.

Coaxial

Diplexer

ZX75-2R15-S+

50Ω DC to 2150 MHz (DC-20, 950-2150 MHz)

Generic photo used for illustration purposes only

CASE STYLE: FL905

Connectors	Model
SMA	ZX75-2R15-S+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	1W at 25°C

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

HIGH PASS PORT	1
LOW PASS PORT	2
COMMON PORT	3

Features

- Low insertion loss
- 50Ω Impedance
- Combination of Low pass and High pass filters
- Connectorized package

Applications

- Satellite systems
- Automotive electronics
- Ponit-to-point radios

Outline Drawing

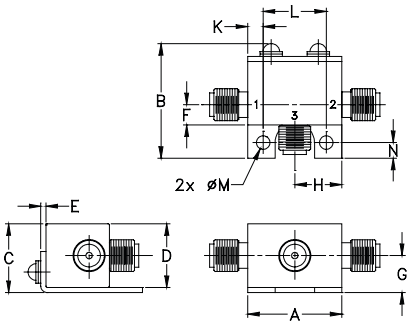

Outline Dimensions (inch / mm)

A	B	C	D	E	F	G
.74	.90	.54	.50	.04	.16	.29
18.80	22.86	13.72	12.70	1.02	4.06	7.37

H	J	K	L	M	N	wt
.37	--	.122	.496	.106	.122	grams
9.40	--	3.10	12.60	2.69	3.10	20.0

Note: Please refer to case style drawing for details

Electrical Specifications at 25°C

Parameter		Port	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Insertion Loss	Low Pass	DC-20	-	0.4	1.0	dB
		High Pass	950-2150	-	0.5	1.0	
	Return Loss	Low Pass	DC-20	18	26	-	dB
		High Pass	950-2150		26	-	
		Common	DC-20	18	26	-	
			950-2150		24	-	
Stop Band Isolation		Low Pass	70-2500	20	30	-	dB
			950-2150	-	49	-	
		High Pass	DC-320	20	30	-	dB
			DC-20	-	91	-	

Typical Performance Data at 25°C

FREQUENCY (MHz)	INSERTION LOSS (dB)		RETURN LOSS (dB)		
	Low Pass Port	High Pass Port	Common Port	Low Pass Port	High Pass Port
0.5	0.23	100.08	31.94	32.19	0.00
20.0	0.39	97.64	29.34	32.49	0.00
30.0	0.72	97.31	15.97	17.45	0.00
40.0	4.11	92.55	3.53	3.74	0.00
50.0	13.60	86.89	0.74	0.87	0.00
70.0	30.49	82.31	0.27	0.36	0.01
110.0	66.66	77.18	0.14	0.18	0.01
200.0	54.57	53.30	0.08	0.08	0.05
320.0	55.29	31.09	0.10	0.05	0.16
450.0	56.26	14.56	0.36	0.04	0.54
500.0	57.34	9.60	0.81	0.04	1.05
550.0	59.16	5.64	1.88	0.04	2.17
600.0	61.76	2.95	3.95	0.05	4.27
650.0	63.92	1.48	7.01	0.05	7.32
700.0	63.58	0.79	10.71	0.05	10.96
950.0	60.10	0.23	30.09	0.06	30.96
1250.0	58.01	0.19	25.95	0.08	27.60
1500.0	55.59	0.18	25.49	0.09	26.46
2000.0	58.34	0.19	31.74	0.11	33.20
2150.0	55.86	0.18	31.24	0.13	31.97
2300.0	54.23	0.19	29.08	0.18	29.15
2500.0	56.12	0.21	25.28	0.23	25.02

Functional Schematic

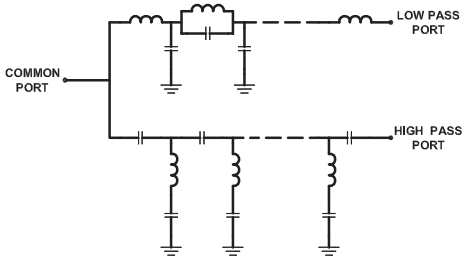

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

ZX75-2R15-S+ LOW PASS PORT
INSERTION LOSS (P_{in}=0dBm)

ZX75-2R15-S+ LOW PASS PORT
RETURN LOSS (P_{in}=0dBm)

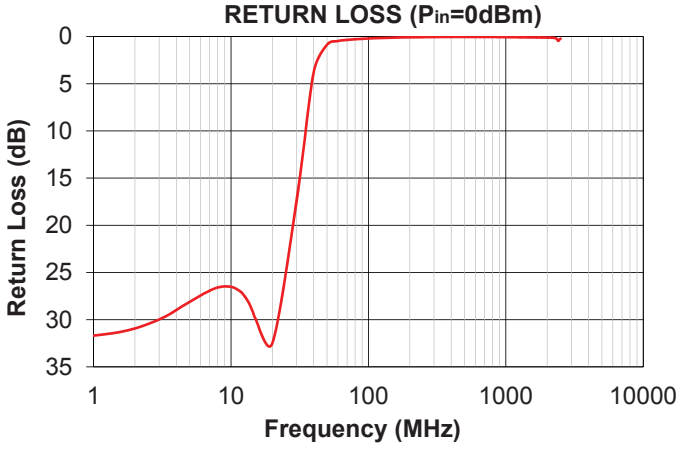

ZX75-2R15-S+ HIGH PASS PORT
INSERTION LOSS (P_{in}=0dBm)

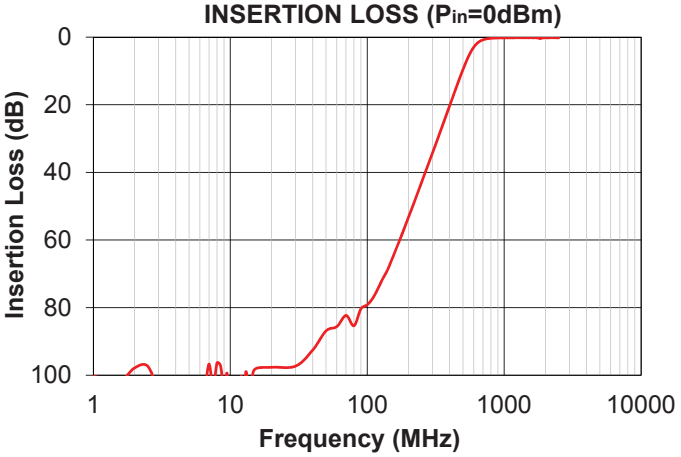

ZX75-2R15-S+ HIGH PASS PORT
RETURN LOSS (P_{in}=0dBm)

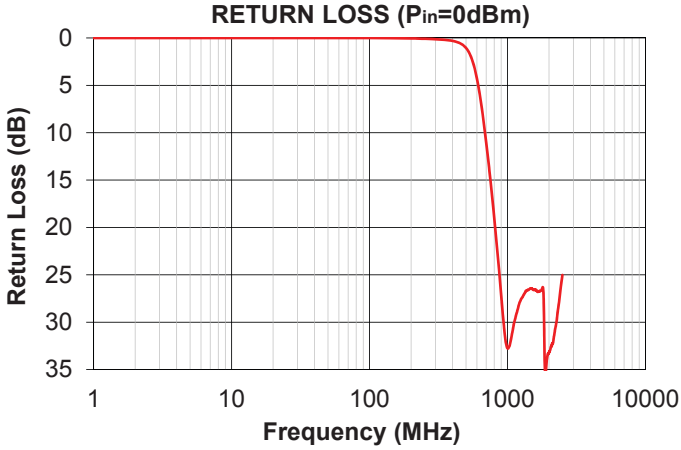

ZX75-2R15-S+ COMMON PORT
RETURN LOSS (P_{in}=0dBm)

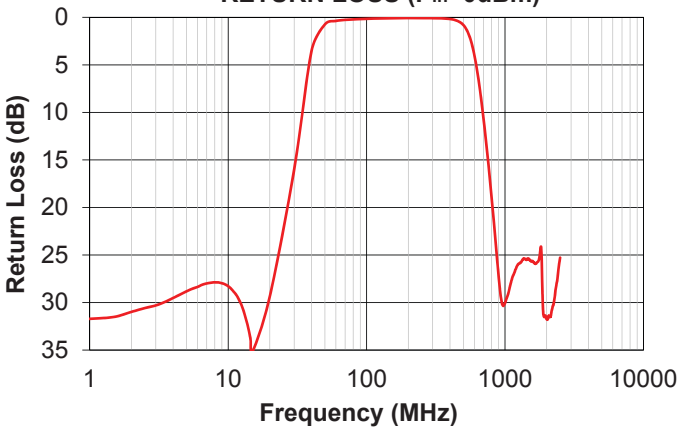

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Coaxial Diplexer ZX75-2R15-S+

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)		Cross over isolation (dB) (Between LPF and HPF)	RETURN LOSS (dB)		
	Lowpass port	Highpass port		Common port	Lowpass port	Highpass port
0.5	0.23	100.08	106.79	31.94	32.19	0.00
1.0	0.22	100.32	107.45	31.71	31.69	0.00
5.0	0.24	106.85	104.16	28.82	28.12	0.00
11.0	0.28	102.26	118.28	28.88	26.76	0.00
12.0	0.29	100.39	107.50	29.74	27.15	0.00
13.0	0.30	99.00	102.01	31.01	27.83	0.00
14.0	0.31	101.56	97.16	32.75	28.73	0.00
15.0	0.32	98.36	100.37	35.17	29.83	0.00
20.0	0.39	97.64	92.92	29.34	32.49	0.00
40.0	4.11	92.55	97.44	3.53	3.74	0.00
50.0	13.60	86.89	98.24	0.74	0.87	0.00
60.0	22.68	85.61	90.59	0.38	0.48	0.00
80.0	37.62	85.36	94.64	0.22	0.29	0.01
100.0	52.89	79.17	92.71	0.16	0.21	0.01
110.0	66.66	77.18	94.56	0.14	0.18	0.01
120.0	64.51	74.30	92.60	0.12	0.16	0.02
140.0	56.72	69.05	94.29	0.10	0.13	0.02
160.0	55.06	63.37	92.24	0.09	0.11	0.03
180.0	54.67	58.21	89.50	0.08	0.09	0.04
200.0	54.57	53.30	90.85	0.08	0.08	0.05
220.0	54.68	48.85	91.99	0.07	0.07	0.06
240.0	54.71	44.78	89.58	0.07	0.07	0.08
260.0	54.90	40.97	89.88	0.08	0.06	0.09
280.0	55.06	37.46	92.52	0.08	0.06	0.11
300.0	55.17	34.18	89.09	0.09	0.06	0.13
320.0	55.29	31.09	90.13	0.10	0.05	0.16
340.0	55.35	28.17	88.50	0.11	0.05	0.18
350.0	55.42	26.77	87.65	0.11	0.05	0.20
360.0	55.47	25.40	83.27	0.12	0.05	0.22
380.0	55.58	22.78	84.48	0.15	0.05	0.26
400.0	55.70	20.28	80.58	0.18	0.05	0.31
420.0	55.84	17.91	78.68	0.23	0.05	0.38
440.0	56.15	15.65	76.36	0.31	0.05	0.48
450.0	56.26	14.56	75.27	0.36	0.04	0.54
460.0	56.38	13.50	74.83	0.42	0.04	0.61
480.0	56.81	11.47	73.11	0.58	0.04	0.79
500.0	57.34	9.60	71.36	0.81	0.04	1.05
550.0	59.16	5.64	67.30	1.88	0.04	2.17
600.0	61.76	2.95	64.64	3.95	0.05	4.27
700.0	63.58	0.79	62.24	10.71	0.05	10.96
800.0	61.98	0.35	61.35	18.96	0.05	18.87
900.0	60.62	0.25	60.62	27.33	0.06	27.17
950.0	60.10	0.23	60.00	30.09	0.06	30.96
1000.0	59.66	0.22	59.78	30.04	0.06	32.75
1200.0	58.16	0.19	58.35	26.41	0.07	28.33
1400.0	56.14	0.19	56.08	25.42	0.08	26.62
1500.0	55.59	0.18	55.58	25.49	0.09	26.46
1600.0	54.65	0.18	54.61	25.73	0.09	26.57
1700.0	53.10	0.19	53.06	25.79	0.10	26.74
1800.0	49.52	0.31	49.31	24.46	0.11	26.30
1900.0	62.63	0.23	60.46	31.36	0.11	35.12
2000.0	58.34	0.19	58.25	31.74	0.11	33.20
2100.0	56.33	0.18	56.31	31.48	0.12	32.36
2150.0	55.86	0.18	55.88	31.24	0.13	31.97
2200.0	55.46	0.18	55.53	30.55	0.13	31.01
2250.0	54.85	0.19	55.07	30.06	0.14	30.21
2300.0	54.23	0.19	54.43	29.08	0.18	29.15
2350.0	53.71	0.19	53.73	28.13	0.26	28.12
2400.0	54.16	0.19	53.89	27.28	0.46	27.07
2500.0	56.12	0.21	56.10	25.28	0.23	25.02

Typical Performance Curves

LOWPASS INSERTION LOSS
INPUT POWER = 0 dBm

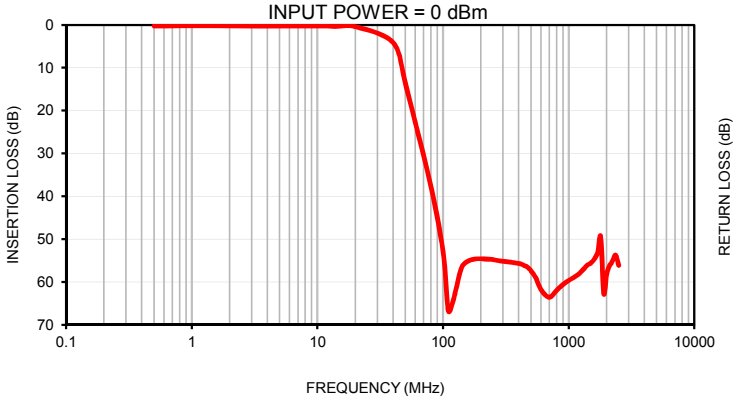

LOWPASS RETURN LOSS
INPUT POWER = 0 dBm

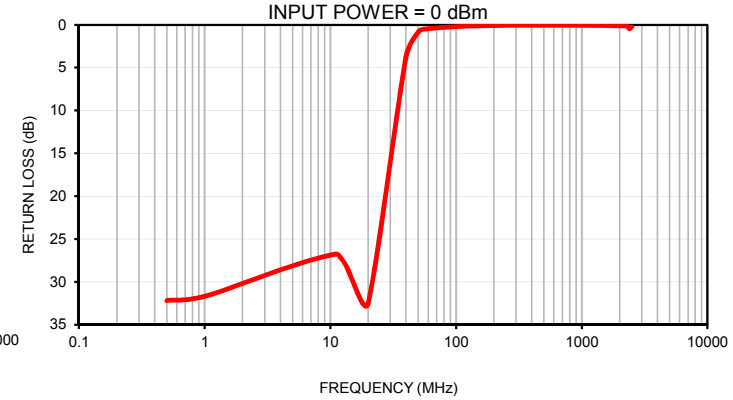

HIGHPASS INSERTION LOSS
INPUT POWER = 0 dBm

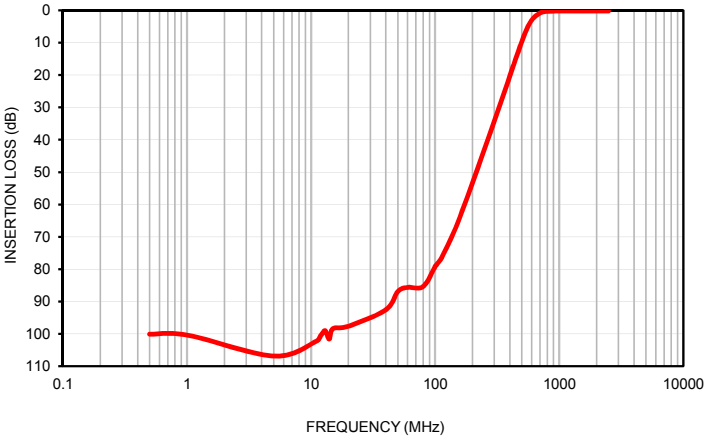

HIGHPASS RETURN LOSS
INPUT POWER = 0 dBm

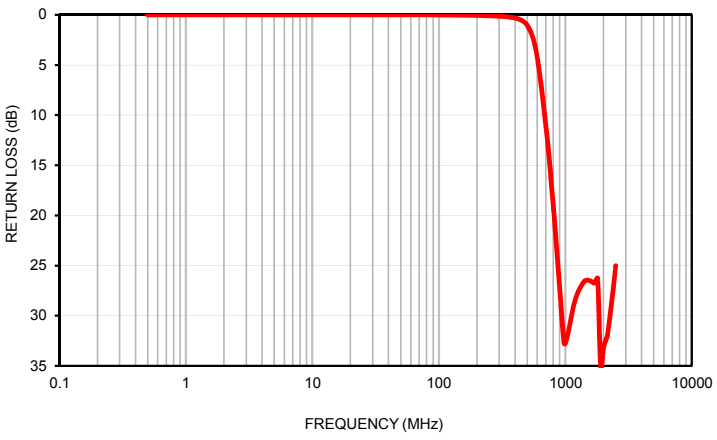

CROSS OVER ISOLATION
INPUT POWER = 0 dBm

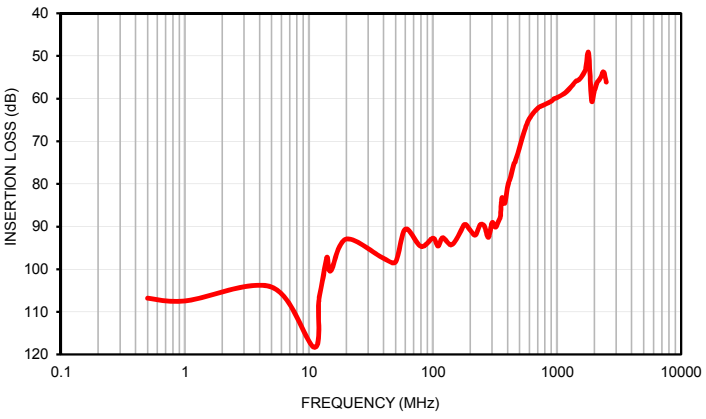

COMMON PORT RETURN LOSS
INPUT POWER = 0 dBm

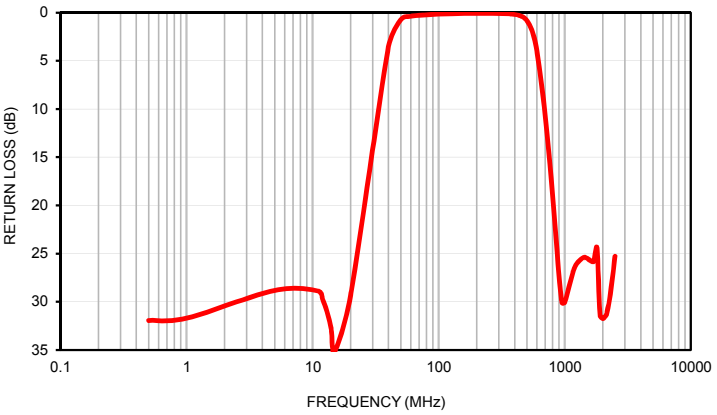

Case Style FL

FL905

Outline Dimensions

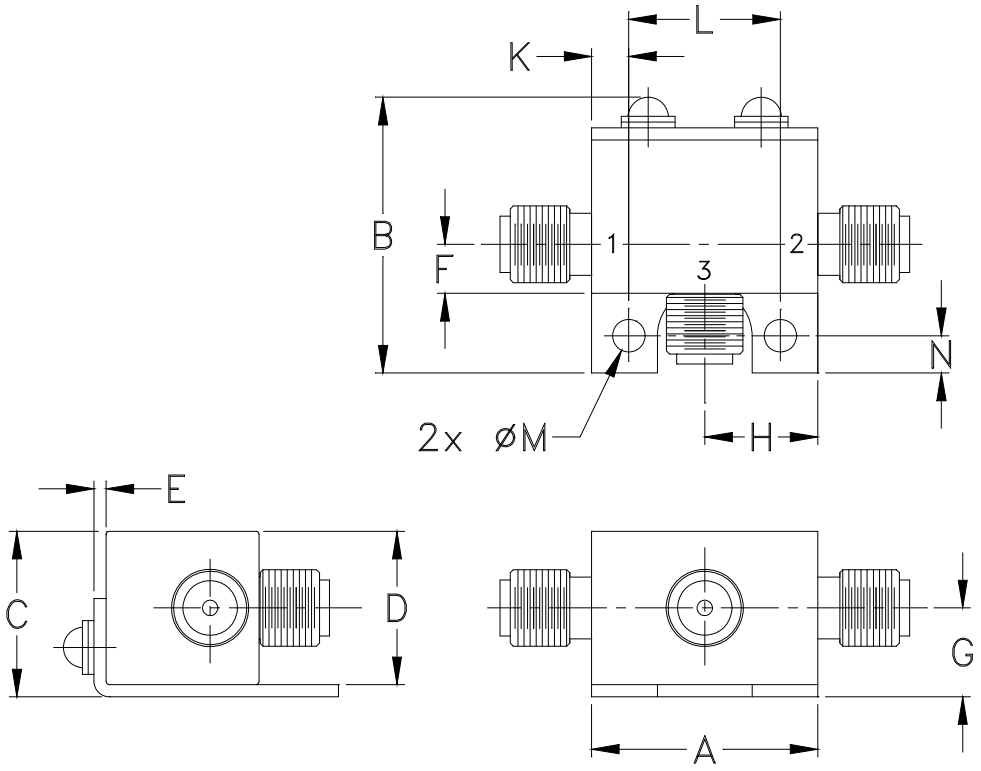

CASE #.	A	B	C	D	E	F	G	H	J	K	L	M	N	WT, GRAM
FL905	.74 (18.80)	.90 (22.86)	.54 (13.72)	.50 (12.70)	.04 (1.02)	.16 (4.06)	.29 (7.37)	.37 (9.40)	- -	.122 (3.10)	.496 (12.60)	.106 (2.69)	.122 (3.10)	20.0

Dimensions are in inches (mm). Tolerances: 2Pl. ± .03; 3Pl. ± .015.
Tolerance on hole size and interaxes dimensions to be ±.005.

Notes:

1. Case material: Brass.
2. Case finish: Nickel plate.

Mini-Circuits®
INTERNET http://www.minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

Mini-Circuits

Environmental Specifications **ENV28T5**

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I