

# Coaxial-Ceramic Resonator Filters and Multiplexers

50Ω

DC to 6 GHz

## The Big Deal

- Low insertion loss with excellent power handling
- Passbands up to 6 GHz
- Fractional bandwidth from <1 to 25%
- Excellent temperature stability
- Rugged construction to handle demanding environmental conditions



## Product Overview

Mini-Circuits' *Coaxial-Ceramic Resonator filters* offer low insertion loss in very small form factors, using ceramic material with high dielectric constant and superior Q factor. Bandpass and bandstop filters, diplexer and multiplexer designs can be constructed using this technology. Low insertion loss combined with excellent power handling makes these filters well suited for transmitter and receiver signal chains. Advanced filter design and construction can achieve stopband width greater than 3x the center frequency.

All our coaxial-ceramic resonator filters are built with rugged construction, qualified to withstand multiple demanding reflow cycles. Custom integrated assembly with LNA greatly simplifying system integration. They can be realized in small form factors with high-quality, precise machining for applications where size is critical. Excellent repeatability across units is achieved through precise tuning and process control.

## Key Features

Feature	Advantages
Low insertion loss	Low signal loss results in better SNR in signal chain
Fast roll-off	Higher selectivity results in better adjacent channel rejection and dynamic range
Wide stop band	Wide spur-free stopband results in better receiver sensitivity
Excellent power handling	Well suited for transmitter applications
Rugged Construction	These filter assemblies have been qualified over a wide range of thermal, mechanical and environmental conditions including withstanding the stress of extensive solder reflow cycles
Small Size	Very well suited for high performance applications where size is a constraint.
Temperature stability	Very minimal change in electrical performance across temperature makes these filters suitable for a wide range of operating conditions.

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Coaxial Bandpass Filter

## ZX75BP-840-S+

50Ω 790 to 890 MHz



Generic photo used for illustration purposes only

CASE STYLE: HY1238  
Connectors Model  
SMA-MF ZX75BP-840-S+

### Features

- Low insertion loss
- High selectivity
- High power handling
- Connectorized package

### Applications

- Traffic collision avoidance system (TCAS)
- Aeronautical radio navigation
- Fixed satellite
- Radio astronomy
- Radar and navigation system

### Electrical Specifications at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Center Frequency	-	-	840	-	MHz
	Insertion Loss	F1-F2	790-890	-	1.0	dB
	VSWR	F1-F2	790-890	-	1.3	:1
Stop Band, Lower	Insertion Loss	DC-F3	DC - 665	20	30	dB
	VSWR	DC-F3	DC - 665	-	20	:1
Stop Band, Upper	Insertion Loss	F4-F5	1070-1650	20	30	dB
	VSWR	F4-F5	1070-1650	-	20	:1

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input*	5 W max.

\* Passband rating, derate linearly to 3.5W at 85°C ambient. Permanent damage may occur if any of these limits are exceeded.

### Functional Schematic

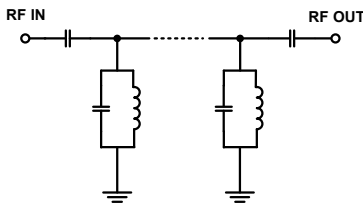

### Typical Frequency Response







### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
1	97.61	4229.18	790	6.64
500	55.57	106.11	795	6.34
665	34.65	72.01	800	6.11
677	30.86	66.79	805	5.92
707	20.78	46.78	810	5.76
732	11.20	18.81	815	5.61
755	3.10	3.48	820	5.48
785	0.83	1.05	825	5.37
790	0.80	1.04	830	5.28
840	0.71	1.20	835	5.21
890	0.68	1.06	840	5.14
900	0.71	1.09	845	5.10
940	3.00	3.85	850	5.08
970	9.89	18.08	855	5.07
990	14.87	34.88	860	5.06
1014	20.34	52.32	865	5.07
1065	30.76	70.19	870	5.09
1070	31.77	70.60	875	5.11
1400	43.17	86.94	880	5.15
1650	45.40	86.82	890	5.29

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

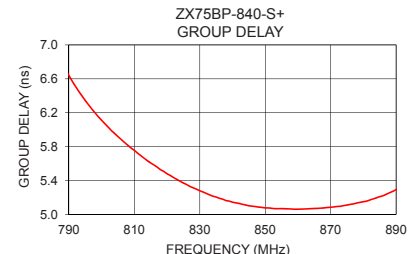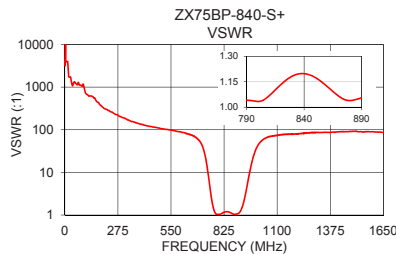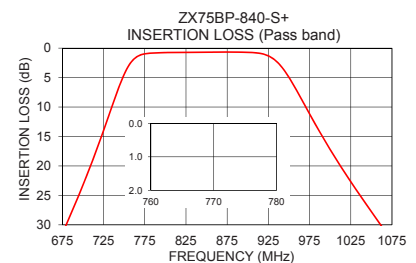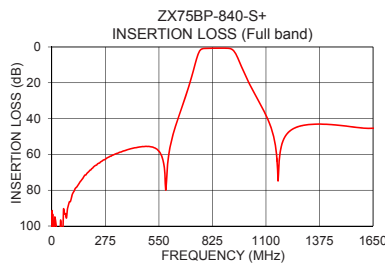

### Notes


- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



## Coaxial Connections

INPUT	SMA-MALE
OUTPUT	SMA-FEMALE

## Outline Drawing

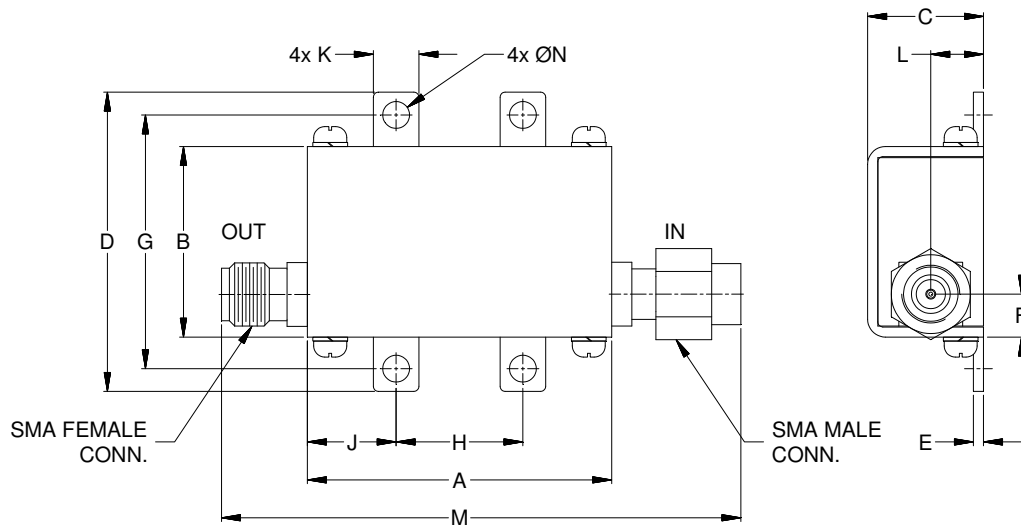

## Outline Dimensions ( $\frac{\text{inch}}{\text{mm}}$ )

A	B	C	D	E	F	G
1.20	.75	.46	1.18	.04	.17	1.00
30.48	19.05	11.68	29.97	1.02	4.32	25.40
H	J	K	L	M	N	Wt.
.50	.35	.18	.21	2.05	.106	grams
12.70	8.89	4.57	5.28	52.07	2.69	35.0

Note: Please refer to case style drawing for details

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



*Typical Performance Data*

FREQ.  (MHz)	INSERTION LOSS			INPUT RETURN LOSS			OUTPUT RETURN LOSS		
	(dB)			(dB)			(dB)		
	@-40°C	@+25°C	@+85°C	@-40°C	@+25°C	@+85°C	@-40°C	@+25°C	@+85°C
1	123.09	97.61	102.00	0.01	0.00	0.01	0.01	0.01	0.01
10	99.62	117.62	100.54	0.00	0.00	0.00	0.00	0.01	0.01
50	106.09	110.49	94.67	0.01	0.01	0.01	0.02	0.03	0.03
100	82.99	84.54	84.31	0.00	0.02	0.02	0.04	0.06	0.07
150	74.29	74.72	74.47	0.01	0.03	0.03	0.08	0.12	0.14
200	68.55	68.66	68.49	0.02	0.05	0.05	0.16	0.20	0.22
225	65.86	66.13	66.08	0.03	0.06	0.06	0.20	0.24	0.27
250	63.86	64.23	64.24	0.04	0.07	0.07	0.24	0.28	0.31
275	62.51	62.69	62.61	0.04	0.08	0.08	0.27	0.32	0.35
300	61.00	61.01	61.36	0.05	0.09	0.09	0.29	0.35	0.38
325	59.74	59.83	60.10	0.06	0.10	0.10	0.32	0.38	0.42
350	58.62	58.75	58.86	0.07	0.11	0.11	0.35	0.42	0.46
375	57.81	57.90	58.00	0.07	0.12	0.13	0.36	0.44	0.48
400	57.06	57.01	57.13	0.08	0.13	0.14	0.38	0.46	0.51
500	55.55	55.57	55.66	0.11	0.16	0.18	0.42	0.51	0.56
600	61.03	60.66	59.21	0.13	0.19	0.21	0.41	0.51	0.57
665	34.79	34.65	34.05	0.17	0.24	0.26	0.39	0.50	0.55
680	30.03	29.90	29.29	0.19	0.27	0.29	0.39	0.50	0.55
708	20.57	20.42	19.75	0.28	0.38	0.42	0.44	0.56	0.63
730	12.14	12.00	11.29	0.67	0.83	0.96	0.80	0.97	1.11
740	8.10	8.01	7.34	1.34	1.56	1.86	1.47	1.69	1.98
750	4.45	4.46	3.96	3.07	3.43	4.12	3.23	3.57	4.21
755	3.03	3.10	2.74	4.70	5.14	6.15	4.91	5.32	6.23
760	2.00	2.12	1.91	7.04	7.58	9.01	7.35	7.83	9.06
790	0.63	0.80	0.86	33.90	34.04	27.79	31.35	30.17	23.68
800	0.59	0.75	0.82	38.05	35.66	26.47	32.25	31.17	25.00
840	0.57	0.71	0.77	20.45	20.92	20.89	21.41	22.14	22.90
860	0.53	0.68	0.74	24.19	24.78	25.00	23.87	24.32	25.03
890	0.53	0.68	0.75	32.93	31.43	31.47	27.92	26.34	25.94
900	0.55	0.71	0.79	27.87	26.88	26.20	24.24	23.04	22.44
915	0.71	0.89	0.98	16.30	15.95	15.51	15.59	15.08	14.64
925	1.10	1.31	1.42	10.32	10.19	10.00	10.28	10.07	9.87
940	2.76	3.00	3.12	4.57	4.62	4.63	4.85	4.89	4.92
970	9.71	9.89	9.90	0.85	0.96	1.02	1.26	1.42	1.53
1015	20.47	20.56	20.45	0.24	0.33	0.36	0.65	0.81	0.90
1070	31.73	31.77	31.62	0.17	0.25	0.27	0.55	0.71	0.80
1100	38.16	38.14	38.02	0.16	0.23	0.26	0.53	0.69	0.77
1125	44.82	44.72	44.59	0.15	0.23	0.25	0.51	0.67	0.75
1150	56.74	56.17	56.13	0.15	0.22	0.25	0.50	0.66	0.74
1175	56.94	57.57	57.34	0.15	0.22	0.24	0.49	0.65	0.73
1200	49.49	49.73	49.61	0.15	0.22	0.24	0.48	0.64	0.71
1225	46.56	46.75	46.65	0.14	0.21	0.24	0.48	0.63	0.70
1250	45.01	45.14	45.06	0.14	0.21	0.23	0.47	0.62	0.69
1275	44.09	44.20	44.14	0.13	0.20	0.23	0.47	0.62	0.69
1300	43.53	43.63	43.56	0.13	0.20	0.22	0.47	0.62	0.68
1325	43.20	43.31	43.27	0.13	0.20	0.22	0.48	0.61	0.67
1350	43.02	43.14	43.11	0.12	0.20	0.22	0.48	0.61	0.67
1375	43.00	43.09	43.08	0.12	0.20	0.22	0.48	0.61	0.67
1400	43.05	43.17	43.16	0.13	0.20	0.22	0.49	0.62	0.67
1425	43.16	43.28	43.32	0.12	0.19	0.22	0.50	0.62	0.67
1450	43.39	43.49	43.52	0.12	0.19	0.22	0.50	0.63	0.68
1475	43.64	43.76	43.81	0.12	0.19	0.22	0.51	0.63	0.68
1500	43.93	44.05	44.10	0.11	0.19	0.22	0.52	0.64	0.69
1525	44.27	44.37	44.42	0.12	0.19	0.22	0.53	0.65	0.70
1550	44.61	44.73	44.74	0.12	0.20	0.23	0.55	0.66	0.71
1575	44.93	45.05	45.07	0.11	0.19	0.22	0.56	0.67	0.73
1600	45.20	45.34	45.30	0.11	0.19	0.23	0.58	0.69	0.74
1625	45.32	45.45	45.42	0.11	0.20	0.23	0.59	0.71	0.76
1640	45.33	45.44	45.37	0.11	0.20	0.23	0.61	0.72	0.78
1650	45.29	45.40	45.36	0.11	0.20	0.24	0.62	0.73	0.79



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)







IF/RF MICROWAVE COMPONENTS

REV.A  
ZX75BP-840-S+  
181221


## Typical Performance Data

FREQ.  (MHz)	GROUP DELAY		
	(nsec)		
	@-40°C	@+25°C	@+85°C
790.00	6.70	6.64	6.48
792.00	6.57	6.51	6.36
794.00	6.45	6.40	6.26
796.00	6.34	6.29	6.17
798.00	6.25	6.20	6.07
800.00	6.16	6.11	5.99
802.00	6.07	6.03	5.92
804.00	6.00	5.96	5.85
806.00	5.93	5.88	5.78
808.00	5.86	5.82	5.72
810.00	5.79	5.76	5.66
812.00	5.73	5.69	5.60
814.00	5.67	5.63	5.55
816.00	5.62	5.58	5.50
818.00	5.56	5.53	5.45
820.00	5.51	5.48	5.41
822.00	5.46	5.44	5.36
824.00	5.42	5.39	5.32
826.00	5.38	5.35	5.29
828.00	5.34	5.31	5.25
830.00	5.30	5.28	5.22
832.00	5.27	5.25	5.19
834.00	5.24	5.22	5.16
836.00	5.22	5.19	5.14
838.00	5.19	5.16	5.11
840.00	5.17	5.14	5.09
842.00	5.15	5.13	5.08
844.00	5.13	5.11	5.06
846.00	5.12	5.10	5.05
848.00	5.11	5.09	5.04
850.00	5.10	5.08	5.04
852.00	5.09	5.07	5.03
854.00	5.09	5.07	5.02
856.00	5.08	5.07	5.02
858.00	5.08	5.06	5.02
860.00	5.08	5.06	5.02
862.00	5.09	5.06	5.02
864.00	5.09	5.07	5.03
866.00	5.09	5.07	5.03
868.00	5.10	5.08	5.04
870.00	5.10	5.09	5.04
872.00	5.11	5.09	5.05
874.00	5.12	5.10	5.06
876.00	5.13	5.12	5.07
878.00	5.15	5.14	5.09
880.00	5.17	5.15	5.11
882.00	5.19	5.17	5.13
884.00	5.21	5.20	5.16
886.00	5.24	5.22	5.18
888.00	5.27	5.26	5.22
890.00	5.30	5.29	5.26

## Typical Performance Curves

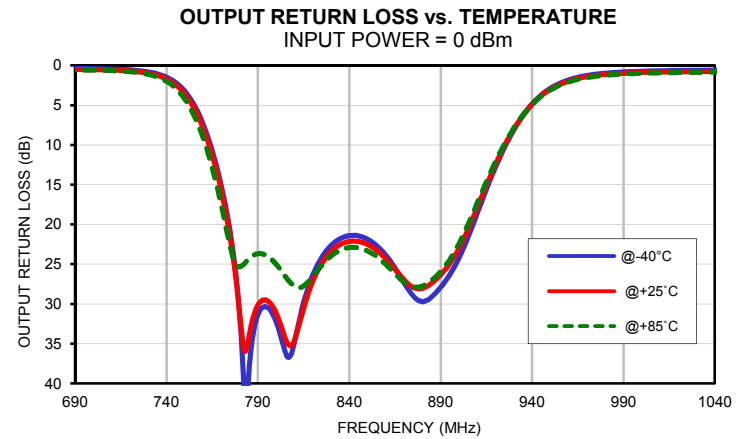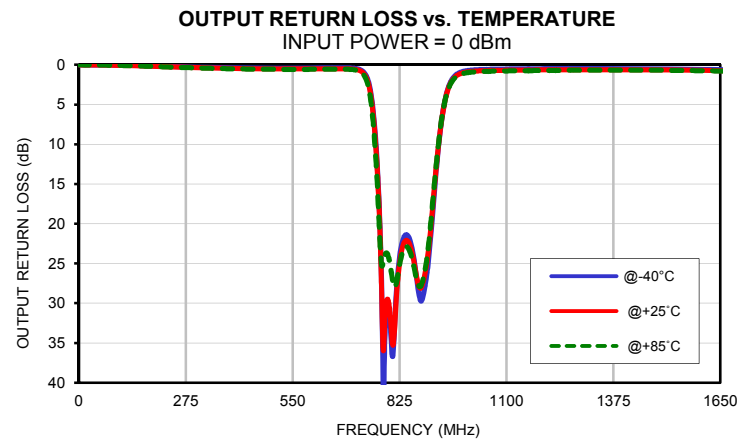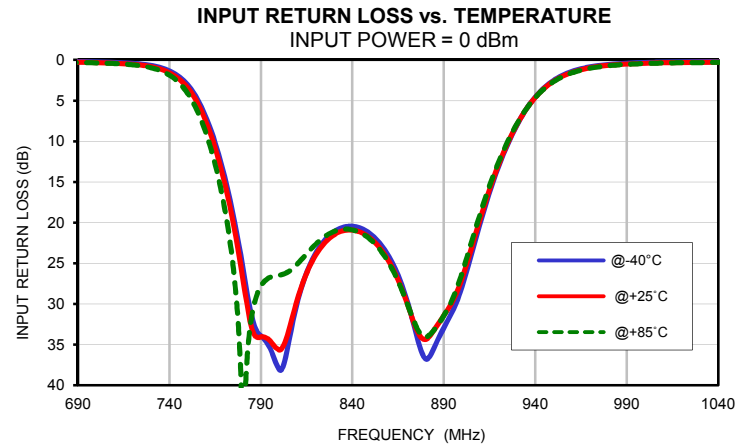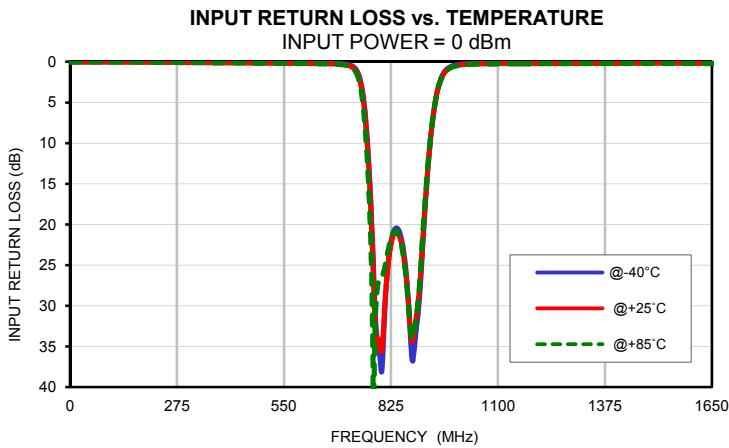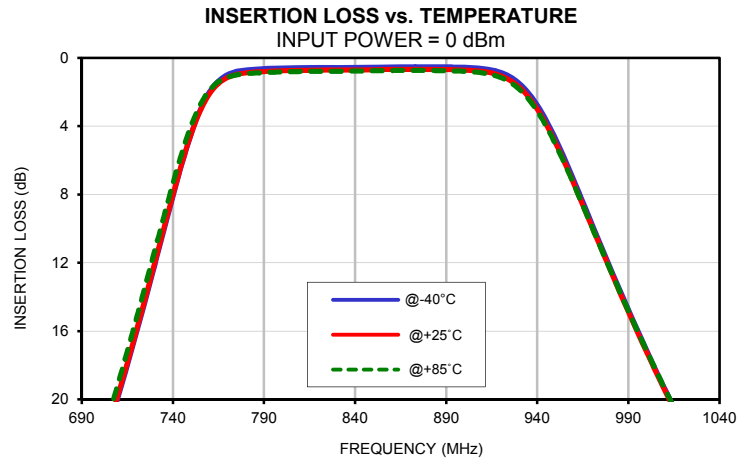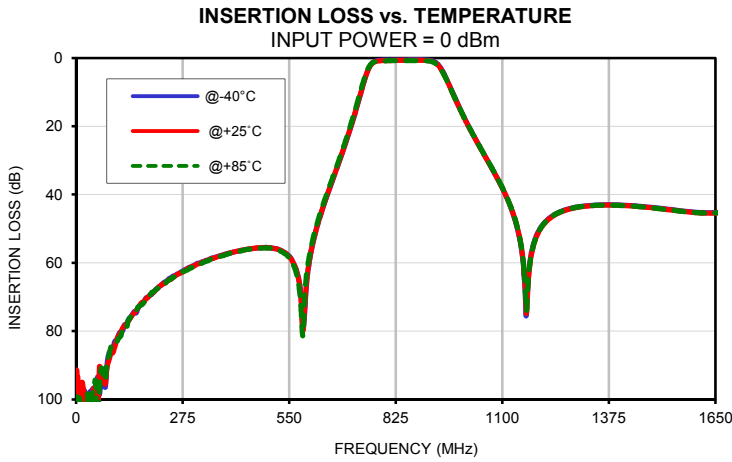

## Typical Performance Curves

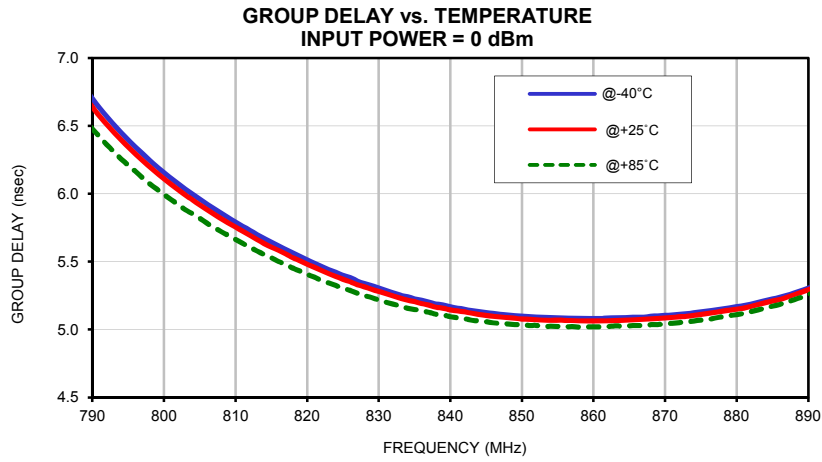


# Case Style

# HY

## Outline Dimensions

## HY1238

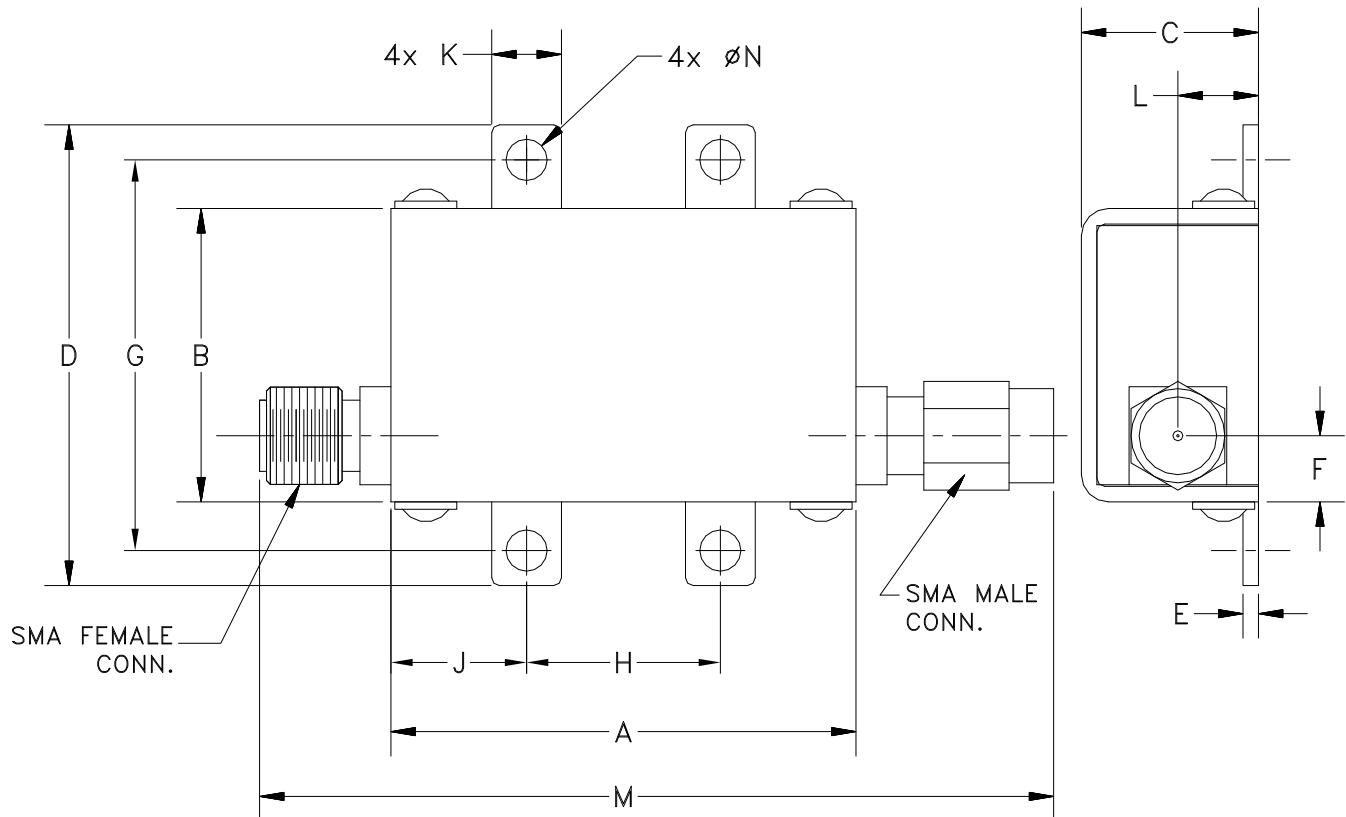

CASE #.	A	B	C	D	E	F	G	H	J	K	L	M	N	WT GRAMS
HY1238	1.20 (30.48)	.75 (19.05)	.46 (11.68)	1.18 (29.97)	.04 (1.02)	.17 (4.32)	1.00 (25.40)	.50 (12.70)	.35 (8.89)	.18 (4.57)	.21 (5.28)	2.05 (52.07)	.106 (2.69)	35.0

Dimensions are in inches (mm). Tolerances: 2Pl.  $\pm .03$ ; 3Pl.  $\pm .015$   
Tolerance on hole size and interaxes dimensions to be  $\pm .005$ .

### Note:

1. Case material: Brass
2. Case finish: Nickel plate

**Mini-Circuits®**

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 40°C, 96 hours; Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103, Condition B
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11ms half-sine, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition A