

Coaxial Bias-Tee

50Ω Wideband 0.2 to 12000 MHz

ZX85-12G-S+



Generic photo used for illustration purposes only

CASE STYLE: GC957

Connectors	Model
SMA	ZX85-12G-S+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	30dBm
Voltage at DC port	25V
DC Current	400mA
DC resistance from DC to RF&DC port	1.8Ω

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

RF	OUT
RF&DC	IN
DC	V+


Features

- wideband, 0.2 to 12000 MHz
- low insertion loss, 0.6 dB typ.
- high current capability, 400 mA
- small size 0.74" x 0.75" x 0.46"
- rugged unibody construction
- protected by US patent 6,790,049

Applications

- biasing amplifiers
- biasing of laser diodes
- biasing of active antennas
- DC return
- DC blocking
- test accessory

Outline Drawing

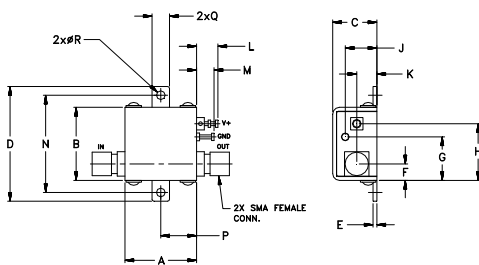

Outline Dimensions (inch)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	wt
.74	.75	.46	1.18	.04	.17	.45	.59	.33	.21	.22	.14	1.00	.37	.16	1.06	grams
18.80	19.1	11.68	30.0	1.02	4.32	11.4	14.99	8.38	5.33	5.59	3.56	25.40	9.40	4.57	2.69	23.0

Bias-Tee Electrical Specifications

FREQ. (MHz)		INSERTION LOSS* (dB)						VSWR* (:1)					
f_L	f_U	L		M		U		L		M		U	
		Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.
0.2	12000	0.1	0.5	0.6	1.5	1.0	2.5	1.1	1.5	1.2	1.5	1.2	1.5

L= low range(f_L to $10 f_L$)

M=mid range($10 f_L$ to $f_U/2$)


U=upper range ($f_U/2$ to f_U)

*Insertion Loss and VSWR are guaranteed up to 20 dBm RF power and 200mA DC current.

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB) with current		VSWR (:1) with current	
	0mA	200mA	0mA	200mA
0.20	0.09	0.25	1.17	1.18
700.00	0.52	0.93	1.10	1.05
1600.00	1.21	0.65	1.24	1.25
2400.00	0.84	1.14	1.14	1.15
3200.00	0.67	0.76	1.05	1.06
4000.00	0.76	0.77	1.07	1.06
4800.00	0.71	0.81	1.11	1.10
5600.00	0.66	0.76	1.10	1.11
6200.00	0.65	0.73	1.08	1.11
7000.00	0.69	0.75	1.07	1.09
7800.00	0.88	0.80	1.11	1.09
8600.00	1.11	1.11	1.11	1.08
9200.00	1.11	1.15	1.07	1.07
10000.00	1.21	1.20	1.02	1.07
12000.00	1.37	1.39	1.15	1.11





Electrical Schematic



Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



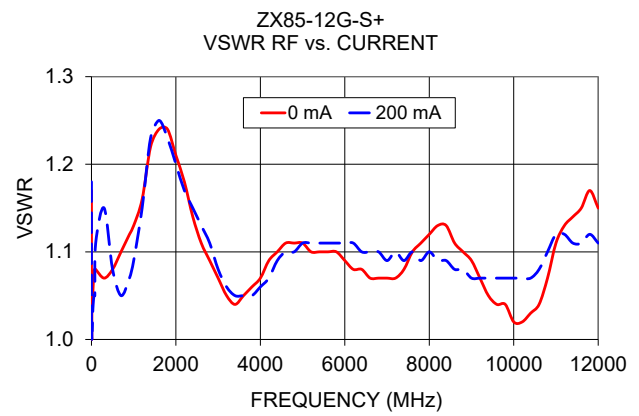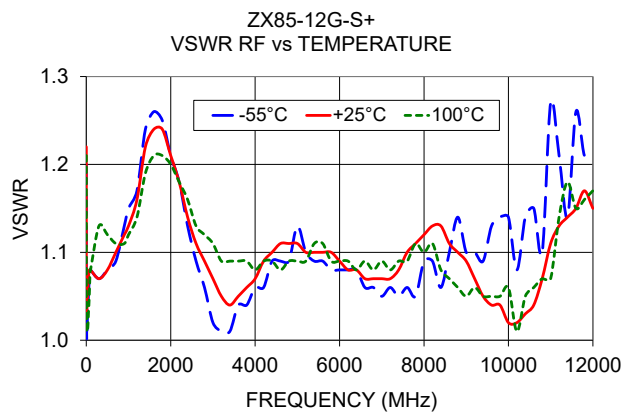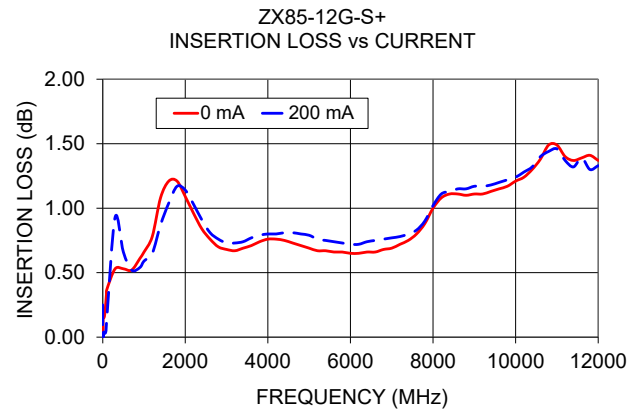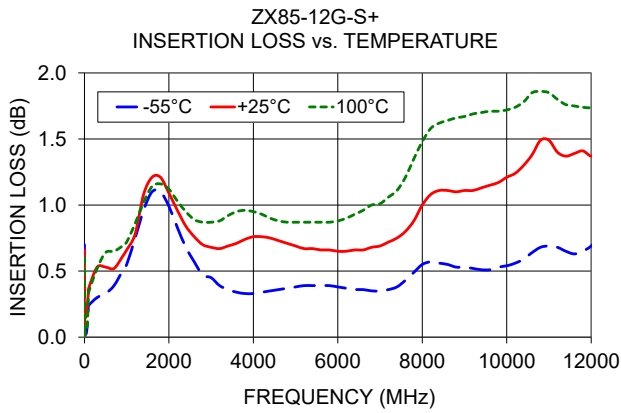

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp









Typical Performance Data

FREQ. (MHz)	INSERTION LOSS (RF Port to RF&DC Port) (dB)				
	+25°		-55°	0mA	
	0mA	200mA		+25°	+100°
0.2	0.09	0.25	0.24	0.09	0.22
0.7	0.02	0.03	0.14	0.02	0.14
2	0.01	0.01	0.08	0.01	0.09
5	0.00	0.01	0.02	0.00	0.01
8	0.00	0.00	0.04	0.00	0.03
30	0.15	0.03	0.02	0.15	0.04
300	0.53	0.93	0.30	0.53	0.52
700	0.52	0.52	0.39	0.52	0.65
1600	1.21	1.04	1.10	1.21	1.14
2400	0.84	0.91	0.68	0.84	0.95
3200	0.67	0.73	0.39	0.67	0.88
4000	0.76	0.80	0.33	0.76	0.95
4800	0.71	0.80	0.37	0.71	0.87
5600	0.66	0.74	0.39	0.66	0.87
6000	0.65	0.72	0.38	0.65	0.88
6200	0.65	0.72	0.37	0.65	0.90
7000	0.69	0.77	0.35	0.69	1.01
7800	0.88	0.90	0.49	0.88	1.35
8600	1.11	1.15	0.55	1.11	1.64
9200	1.11	1.17	0.52	1.11	1.69
10000	1.21	1.24	0.54	1.21	1.72
12000	1.37	1.33	0.69	1.37	1.74

FREQ. (MHz)	VSWR RF Port (:1)					VSWR RF&DC Port (:1)				
	+25°		-55°	0mA		+25°		-55°	0mA	
	0mA	200mA		+25°	+100°	0mA	200mA		+25°	+100°
0.2	1.17	1.18	1.20	1.17	1.21	1.17	1.18	1.20	1.17	1.21
0.7	1.04	1.04	1.05	1.04	1.05	1.04	1.04	1.05	1.04	1.05
2	1.01	1.01	1.03	1.01	1.03	1.01	1.01	1.03	1.01	1.03
5	1.00	1.00	1.02	1.00	1.03	1.00	1.00	1.02	1.00	1.03
8	1.00	1.00	1.02	1.00	1.03	1.00	1.00	1.02	1.00	1.03
30	1.05	1.03	1.03	1.05	1.01	1.02	1.02	1.03	1.02	1.02
300	1.07	1.15	1.07	1.07	1.13	1.11	1.07	1.08	1.11	1.14
700	1.10	1.05	1.09	1.10	1.11	1.10	1.14	1.11	1.10	1.11
1600	1.24	1.25	1.26	1.24	1.21	1.25	1.25	1.31	1.25	1.21
2400	1.14	1.15	1.13	1.14	1.16	1.17	1.17	1.21	1.17	1.16
3200	1.05	1.06	1.01	1.05	1.09	1.10	1.09	1.15	1.10	1.06
4000	1.07	1.06	1.06	1.07	1.08	1.16	1.15	1.16	1.16	1.14
4800	1.11	1.10	1.09	1.11	1.09	1.22	1.23	1.22	1.22	1.19
5600	1.10	1.11	1.09	1.10	1.11	1.22	1.25	1.23	1.22	1.22
6000	1.09	1.11	1.08	1.09	1.09	1.22	1.25	1.23	1.22	1.22
6200	1.08	1.11	1.08	1.08	1.09	1.22	1.24	1.22	1.22	1.22
7000	1.07	1.09	1.05	1.07	1.09	1.22	1.24	1.22	1.22	1.26
7800	1.11	1.09	1.05	1.11	1.11	1.25	1.24	1.19	1.25	1.29
8600	1.11	1.08	1.10	1.11	1.07	1.23	1.18	1.21	1.23	1.28
9200	1.07	1.07	1.10	1.07	1.06	1.25	1.20	1.24	1.25	1.32
10000	1.02	1.07	1.14	1.02	1.06	1.25	1.23	1.25	1.25	1.28
12000	1.15	1.11	1.21	1.15	1.17	1.16	1.20	1.08	1.16	1.15

Typical Performance Curves

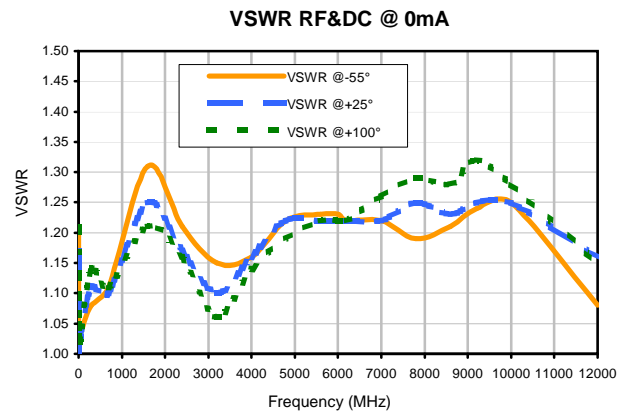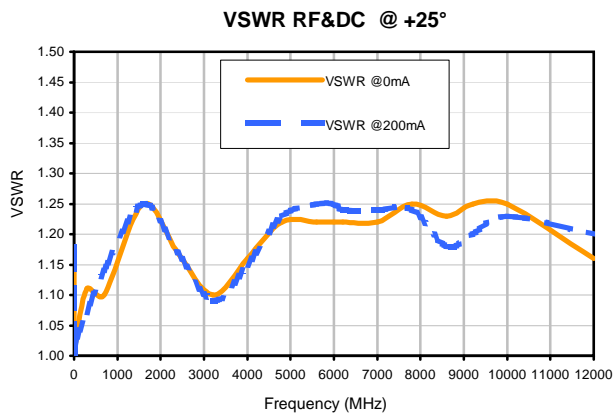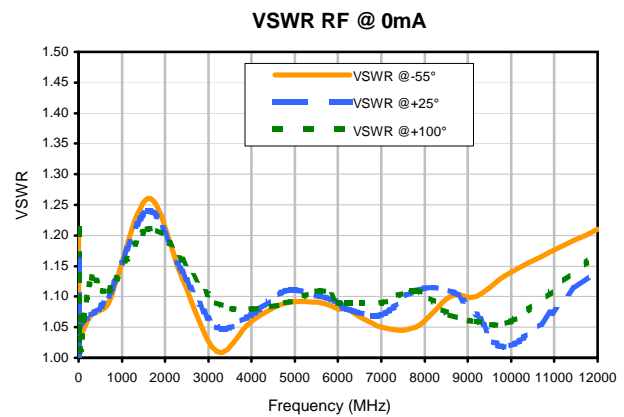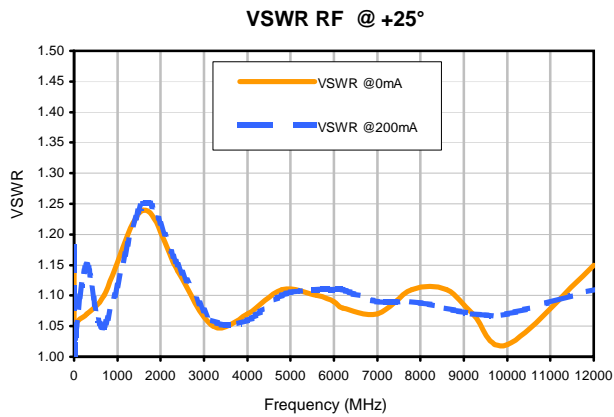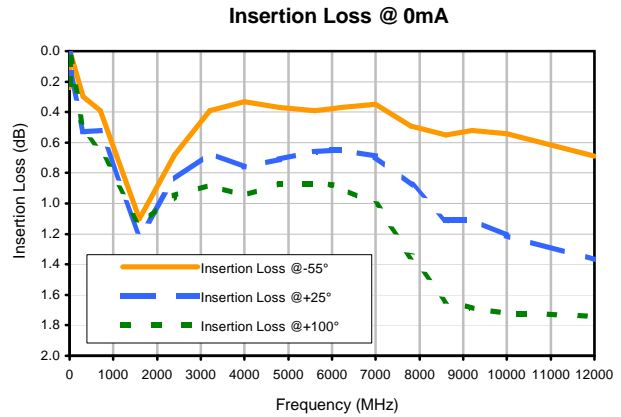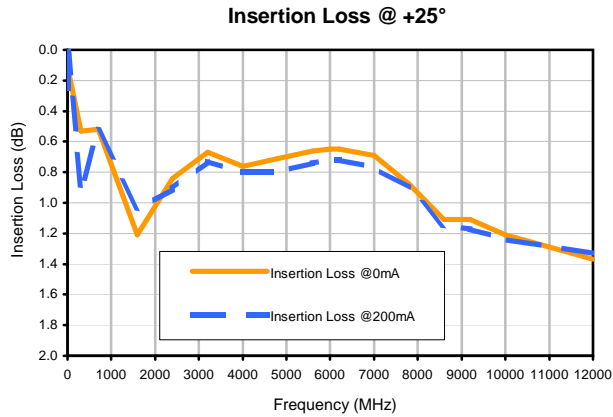


Case Style

GC

Outline Dimensions

GC957

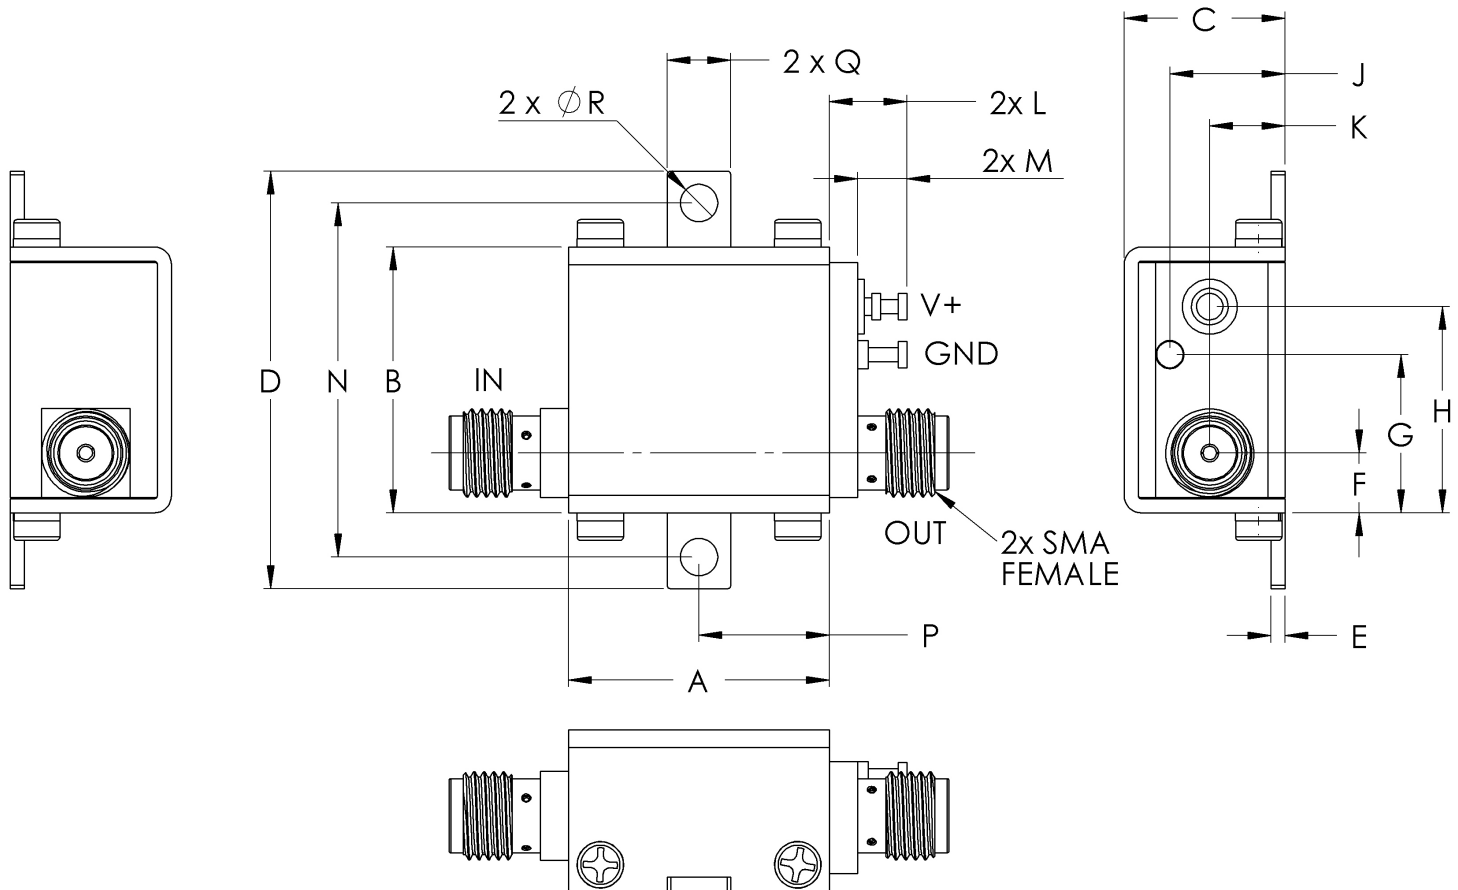

CASE #.	A	B	C	D	E	F	G	H	J	K	L	M	N
GC957	.74 (18.80)	.75 (19.15)	.46 (11.61)	1.18 (30.07)	.04 (1.02)	.17 (4.32)	.45 (11.40)	.59 (14.86)	.33 (8.31)	.21 (5.44)	.22 (5.59)	.14 (3.56)	1.00 (25.4)

CASE #.	P	Q	R	WT GRAMS
GC957	.37 (9.40)	.18 (4.57)	.106 (2.69)	23.0

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .03$; 3Pl. $\pm .015$
Tolerance on hole size and interaxes dimensions to be $\pm .005$.

Note:

1. Case material: Brass
2. Case finish: Nickel plate

Mini-Circuits[®]

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I