

COAXIAL

# Adapter

## KMR-35M+

50Ω DC to 33 GHz Right-Angle 2.92 mm Male to 3.5 mm Male

### KEY FEATURES

- Ultra-Wideband, DC to 33 GHz
- Low Insertion Loss, 0.15 dB Typ.
- Excellent VSWR, 1.09:1 Typ.
- Right-Angle Body



Generic photo used for illustration purposes only

### PRODUCT OVERVIEW

Mini-Circuits' KMR-35M+ is a coaxial 2.92 mm Right-Angle Male to 3.5 mm Male adapter supporting a wide range of applications from DC to 33 GHz. This model provides excellent VSWR and low insertion loss versus frequency. The KMR-35M+ features passivated stainless-steel construction and measures only 0.708" in length.

### ELECTRICAL SPECIFICATIONS<sup>1</sup> AT +25°C


Parameter	Frequency (GHz)	Min.	Typ.	Max.	Units
Frequency Range	-	DC	-	33	GHz
Insertion Loss	0.01-33	-	0.15	0.44	dB
VSWR	0.01-33	-	1.09	1.35	:1

1. Specifications are tested to minimum frequency of 0.01 GHz

### ABSOLUTE MAXIMUM RATINGS<sup>2</sup>

Operating Case Temperature	-45° C to +125° C
Storage Temperature	-45° C to +125° C

2. Permanent damage may occur if any of these limits are exceeded.



COAXIAL



# Adapter


## KMR-35M+

Mini-Circuits

50Ω DC to 33 GHz Right-Angle 2.92 mm Male to 3.5 mm Male

### TYPICAL PERFORMANCE GRAPHS

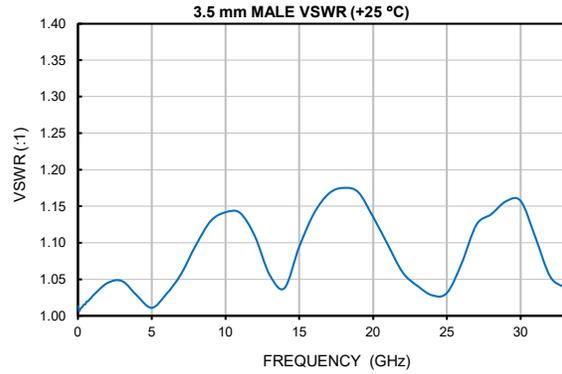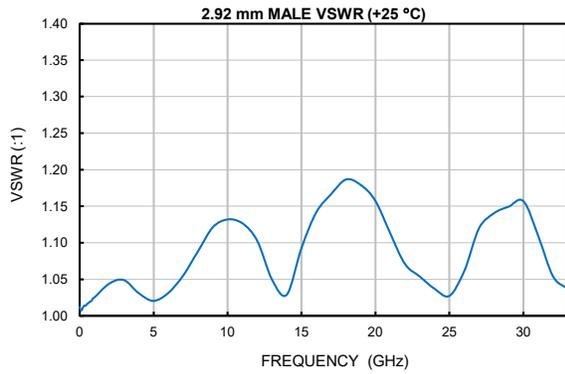



COAXIAL

# Adapter


## KMR-35M+

50Ω DC to 33 GHz Right-Angle 2.92 mm Male to 3.5 mm Male

### CONNECTOR SPECIFICATIONS

Description	Connector 1	Connector 2
Connector Type	2.92 mm-Male	3.5 mm-Male
Orientation	Right-Angle	Straight

### CASE STYLE DRAWING

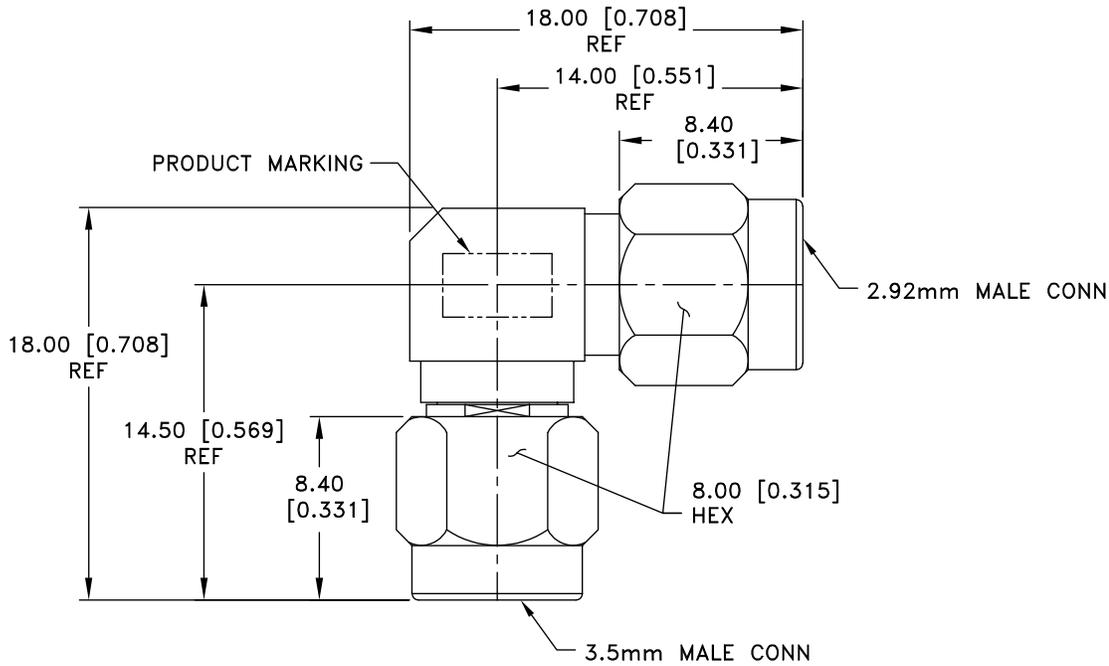


Weight: 9.2 grams

Dimensions are in mm [inches]. Tolerances: 2 PL± 0.40 mm

**PRODUCT MARKING\*:** KMR-35M+

\*Marking may contain other features or characters for internal lot control.



COAXIAL

# Adapter

## KMR-35M+

50Ω DC to 33 GHz Right-Angle 2.92 mm Male to 3.5 mm Male

ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD [CLICK HERE](#)

Performance Data & Graphs	Data Graphs S-Parameter (S2P Files) Data Set (.zip file)
Case Style	DJ3790-1
RoHS Status	Compliant
Environmental Ratings	ENV152

### NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)

