



COAXIAL


## Medium Power Amplifier

ZHL-10M1G21W0+  
ZHL-10M1G21W0X+

50Ω 10 to 1200 MHz Broadband 1W SMA-Female

## KEY FEATURES

- Broadband, 10 to 1200 MHz
- High Gain, 27dB typ.
- High P1dB, +31dBm, typ.
- High OIP3, +48dBm typ.

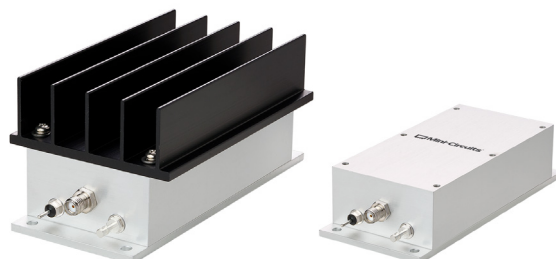


Generic photo used for illustration purposes only

## APPLICATIONS

- Communication Systems
- R&D, Production, and Test Systems
- Test & Measurement Equipment
- General Laboratory Applications

## FUNCTIONAL DIAGRAM

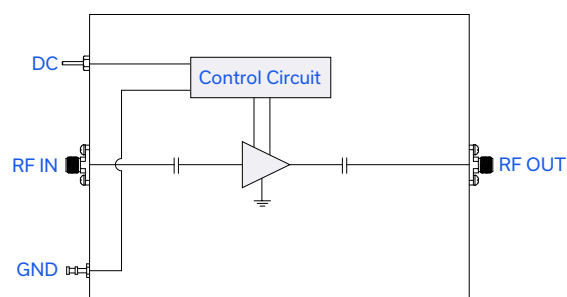

## PRODUCT OVERVIEW

The ZHL-10M1G21W0(X)+ is a medium power broadband amplifier providing more than 1W of output power with a typical small signal gain of 27dB over the 10 to 1200 MHz frequency band. The amplifier uses state-of-the-art semiconductor technology and can be used in a wide range of applications. A single supply voltage ensures ease of operation. The amplifier is made with a rugged aluminum housing and can be supplied with or without a heatsink.

ELECTRICAL SPECIFICATIONS AT  $T_{\text{MOUNTING BASE}} = +25^{\circ}\text{C}$ ,  $V_{\text{DC}} = +24\text{V}$ 

| Parameter                          | Symbol               | Condition                              | Min. | Typ.      | Max.      | Units |
|------------------------------------|----------------------|----------------------------------------|------|-----------|-----------|-------|
| Frequency Range                    | f                    |                                        | 10   |           | 1200      | MHz   |
| Small Signal Gain                  | $G_{\text{SS}}$      | $P_{\text{OUT}} = -25\text{dBm}$       | 24   | 27        | 30        | dB    |
| Small Signal Gain Flatness         | $G_{\text{SS-FLAT}}$ | $P_{\text{OUT}} = -25\text{dBm}$       |      | $\pm 0.4$ | $\pm 1.2$ | dB    |
| Output Power at 1dB compression    | $P_{1\text{dB}}$     | $P_{\text{OUT-REF}} = 15\text{dBm}$    | +29  | +31       |           | dBm   |
| Output Power at 3dB compression    | $P_{3\text{dB}}$     | $P_{\text{OUT-REF}} = 15\text{dBm}$    | +30  | +31       |           | dBm   |
| Noise Figure                       | NF                   |                                        |      | 5.3       |           | dB    |
| Output Third Order Intercept Point | OIP3                 | $P_{\text{OUT}} = +20\text{dBm/ tone}$ |      | +48       |           | dBm   |
| Input Return Loss                  | I-RL                 | $P_{\text{OUT}} = -25\text{dBm}$       | 8.5  | 26        |           | dB    |
| Output Return Loss                 | O-RL                 | $P_{\text{OUT}} = -25\text{dBm}$       | 8.5  | 17        |           | dB    |
| DC Supply Voltage                  | $V_{\text{DC}}$      |                                        | 20   | 24        | 25        | V     |
| Supply Current                     | $I_{\text{DC}}$      | Without fan @ $P_{3\text{dB}}$         |      | 0.50      | 0.75      | A     |
|                                    |                      | With fan @ $P_{3\text{dB}}$            |      | 0.90      | 1.15      |       |

Mini-Circuits



Mini-Circuits







COAXIAL

# Medium Power Amplifier

ZHL-10M1G21W0+  
ZHL-10M1G21W0X+

50Ω 10 to 1200 MHz Broadband 1W SMA-Female

TYPICAL PERFORMANCE DATA AT  $T_{\text{MOUNTINGBASE}} = +25^{\circ}\text{C}$ ,  $V_{\text{DC}} = +24\text{V}$ , 50 OHM

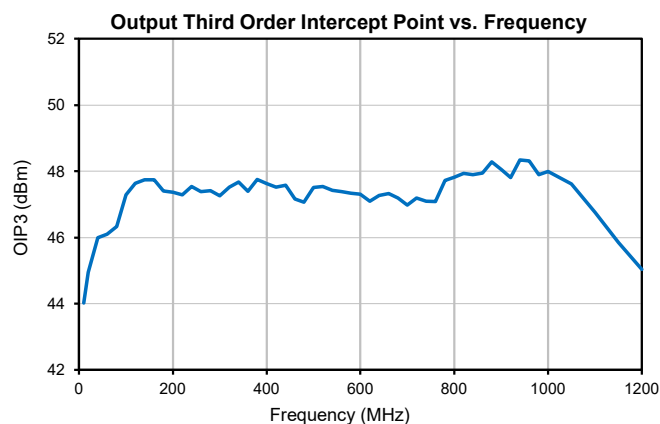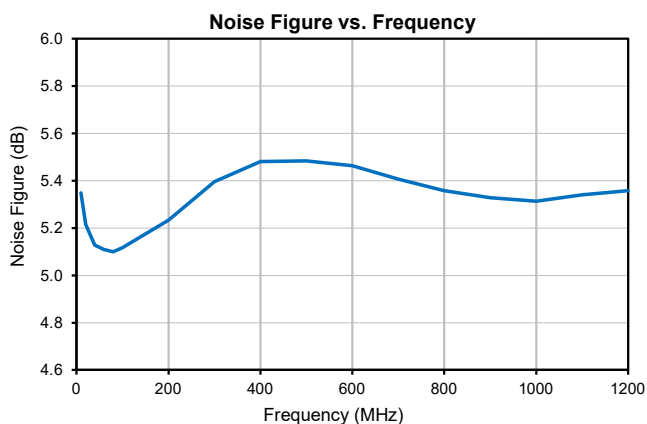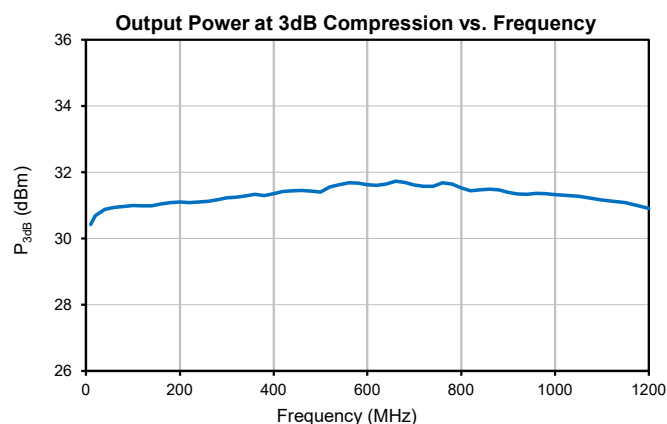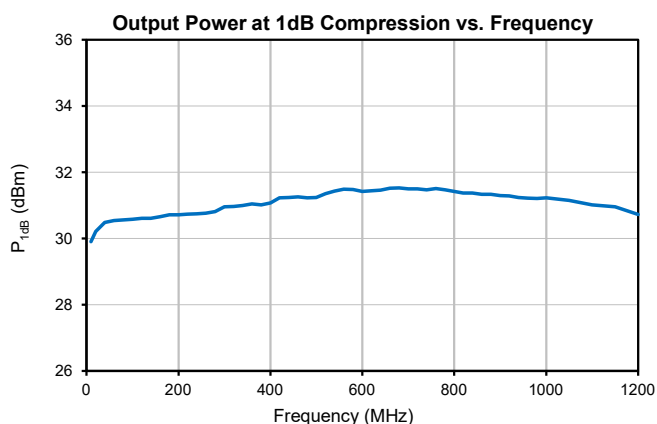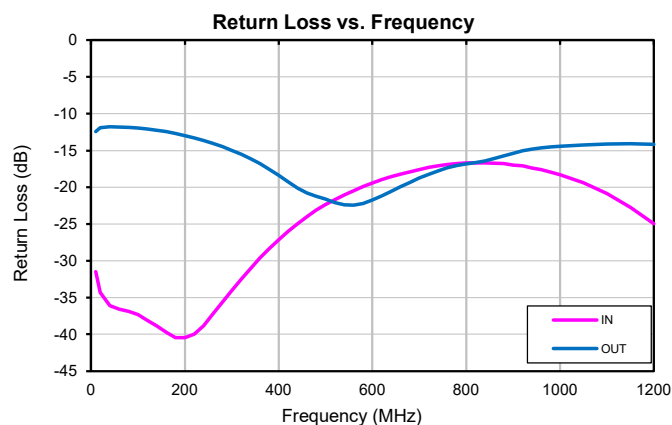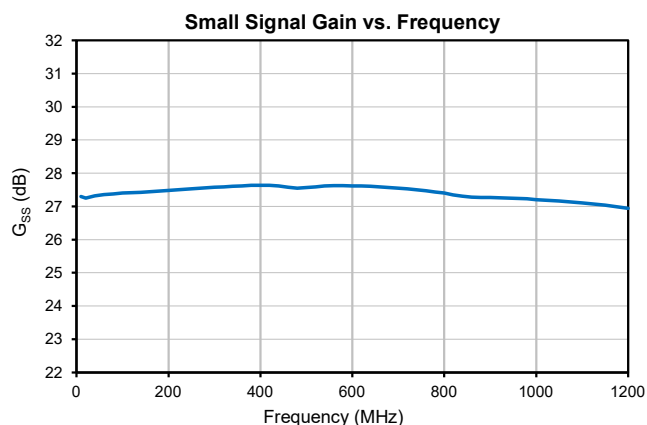

Mini-Circuits



## Medium Power Amplifier

ZHL-10M1G21W0+  
ZHL-10M1G21W0X+

50Ω 10 to 1200 MHz Broadband 1W SMA-Female

## ABSOLUTE MAXIMUM RATINGS

| Parameter                                                                | Ratings                                                       |
|--------------------------------------------------------------------------|---------------------------------------------------------------|
| Operating Temperature                                                    | ZHL-10M1G21W0+ $T_{\text{AMBIENT}}$ : -20 °C to +60 °C        |
|                                                                          | ZHL-10M1G21W0X+ $T_{\text{MOUNTING BASE}}$ : -20 °C to +85 °C |
| Storage Temperature                                                      | 55 °C to +100 °C                                              |
| No damage with an open or short at $P_{\text{OUT}} = +28 \text{ dBm CW}$ |                                                               |
| RF Input Power (no damage)                                               | +10 dBm                                                       |
| DC Operating Voltage                                                     | ±25 V                                                         |

Permanent damage may occur if any of these limits are exceeded.

## DETERMINING MAXIMUM THERMAL RESISTANCE OF USERS' EXTERNAL HEAT SINK

|                                                                                                                                              |                                                                                                                                                                                                                                                                            |
|----------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $\text{MAXIMUM THERMAL RESISTANCE} = \frac{\text{MAXIMUM OPERATING CASE TEMP} - \text{MAXIMUM USER AMBIENT TEMP}}{\text{POWER DISSIPATION}}$ |                                                                                                                                                                                                                                                                            |
| Example:                                                                                                                                     | MAXIMUM MOUNTING BASE TEMP = +85 °C (CHECK MAXIMUM RATINGS TABLE FOR THIS VALUE)<br>MAXIMUM USER AMBIENT TEMP = +60 °C (USER DEFINED)<br>POWER DISSIPATION = 12 WATTS (CHECK MAXIMUM RATINGS TABLE FOR THIS VALUE)<br>THEN MAXIMUM ALLOWABLE THERMAL RESISTANCE = 2.1 °C/W |



COAXIAL

## Medium Power Amplifier

ZHL-10M1G21W0+  
ZHL-10M1G21W0X+


Mini-Circuits

50Ω 10 to 1200 MHz Broadband 1W SMA-Female


## COAXIAL CONNECTIONS

|              |            |
|--------------|------------|
| IN (RF IN)   | SMA-Female |
| OUT (RF OUT) | SMA-Female |

## CASE STYLE DRAWING WITH HEATSINK (ZHL-10M1G21W0+)

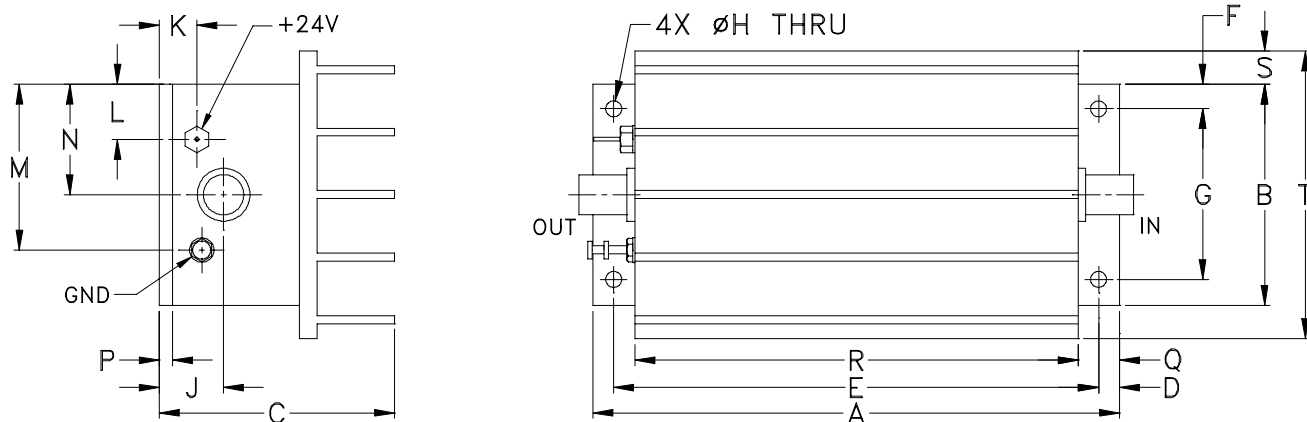

## CASE STYLE DRAWING WITHOUT HEATSINK (ZHL-10M1G21W0X+)

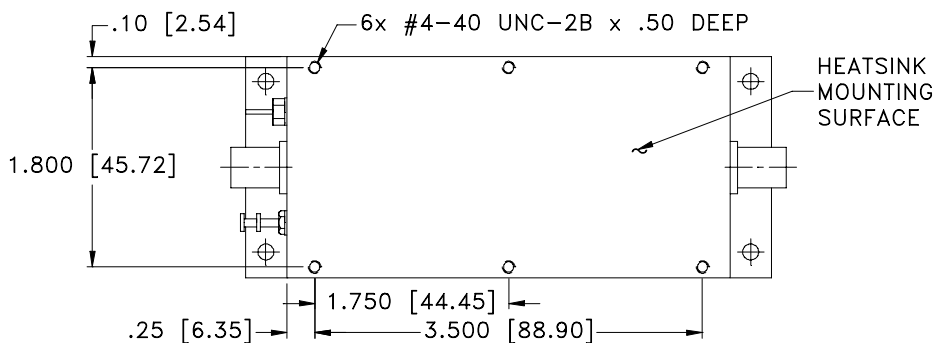

Weight: 440 grams Weight without heatsink: 325 grams Dimensions are in inches [mm].  
Tolerances: 2 Pl. ±03; 3 Pl. ±.015 Inch

## OUTLINE DIMENSIONS (Inch mm)

| A                           | B     | C     | D    | E      | F    | G     | H    | J     | K    | L     | M     | N     | P    | Q    | R      | S    | T     | wt     |
|-----------------------------|-------|-------|------|--------|------|-------|------|-------|------|-------|-------|-------|------|------|--------|------|-------|--------|
| 4.75                        | 2.00  | 2.12  | .19  | 4.375  | .23  | 1.540 | .144 | .58   | .34  | .50   | 1.50  | 1.00  | .12  | .38  | 4.00   | .30  | 2.60  | grams* |
| 120.65                      | 50.80 | 53.85 | 4.83 | 111.13 | 5.84 | 39.12 | 3.66 | 14.73 | 8.64 | 12.70 | 38.10 | 25.40 | 3.05 | 9.65 | 101.60 | 7.62 | 66.04 | 440.0  |
| *325 grams without heatsink |       |       |      |        |      |       |      |       |      |       |       |       |      |      |        |      |       |        |

\*325 grams without heatsink

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 4 OF 5



Mini-Circuits

COAXIAL

# Medium Power Amplifier

**ZHL-10M1G21W0+**  
**ZHL-10M1G21W0X+**

50Ω 10 to 1200 MHz Broadband 1W SMA-Female

## ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD.

|                           |                                              |
|---------------------------|----------------------------------------------|
| Performance Data & Graphs | Table                                        |
|                           | Graphs                                       |
|                           | S-Parameter (S2P Files) Data Set (.zip file) |
| RoHS Status               | Compliant                                    |
| Environmental Ratings     | ENV23T15                                     |

## ORDERING INFORMATION

|                 |                                    |                                 |
|-----------------|------------------------------------|---------------------------------|
| Model No. Links | <a href="#">ZHL-10M1G21W0+</a>     | <a href="#">ZHL-10M1G21W0X+</a> |
| Option          | With heatsink                      | Without heatsink                |
| Case Style      | T34                                |                                 |
| Connector       | IN (SMA-Female) / OUT (SMA-Female) |                                 |

### NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)

