

Surface Mount

Voltage Controlled Oscillator

SOS-704PV-119+

5V Tuning for PLL IC's 677 to 707 MHz

Features

- linear tuning characteristics
- low phase noise
- low pushing
- low pulling
- small size 0.3" x 0.3"
- aqueous washable

Applications

- wireless communications
- wireless microphones



CASE STYLE: FZ802

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

MODEL NO.	FREQ. (MHz)		POWER OUTPUT (dBm)	PHASE NOISE dBc/Hz SSB at offset frequencies, kHz				TUNING					NON HARMONIC SPURIOUS (dBc)	HARMONICS (dBc)		PULLING pk-pk @ 12 dB Br (MHz)	PUSHING (MHz/V)	DC OPERATING POWER	
	Min.	Max.		Typ.	1	10	100	1000	VOLTAGE RANGE (V)	SENSI-TIVITY (MHz/V)	PORT CAP (pF)	3 dB MODULATION BANDWIDTH (MHz)		Typ.	Max.			Typ.	Max.
SOS-704PV-119+	677	707	0	-89	-113	-133	-152	0.5	4.5	12-16	94	30	-90	-13	-	0.3	0.3	5	20

Pin Connections


RF OUT	8
VCC	11
V-TUNE	1
GROUND	2,3,4,5,6,7,9,10,12

Maximum Ratings


Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	7V
Absolute Max. Tuning Voltage (Vtune)	7V
All specifications	50 ohm system

Permanent damage may occur if any of these limits are exceeded.

Outline Drawing

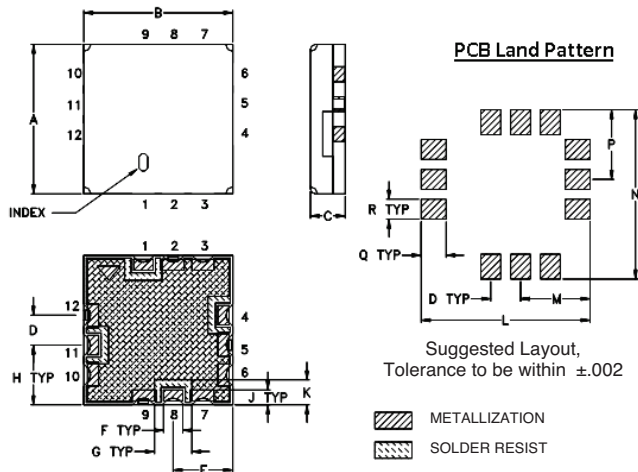

Demo Board MCL P/N: TB-271 Suggested PCB Layout (PL-143)

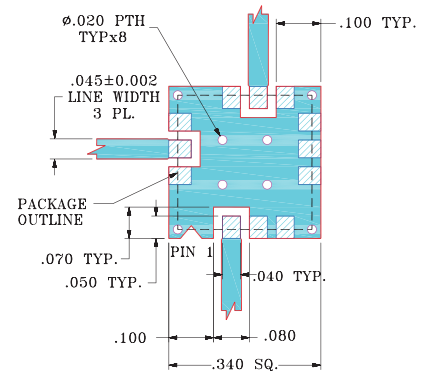

NOTE:

1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .025"±.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	wt.
.300	.300	.070	.060	.120	.039	.075	.120	.030	.050	.340	.140	.340	.140	.050	.040	grams
7.62	7.62	1.78	1.52	3.05	0.99	1.91	3.05	0.76	1.27	8.64	3.56	8.64	3.56	1.27	1.02	.25

NON-CATALOG

Performance Data & Curves*

SOS-704PV-119+

V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			Icc (mA)	HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ. PULL (MHz)	PHASE NOISE (dBc/Hz) at offsets				FREQ OFFSET (KHz)	PHASE NOISE at 692 MHz (dBc/Hz)
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C		F2	F3	F4			1kHz	10kHz	100kHz	1MHz		
0.00	23.83	664.6	658.9	655.4	-0.20	-0.09	-0.37	15.28	-13.0	-48.0	-53.8	0.75	0.21	-84.4	-111.2	-131.8	-151.0	1.0	-88.62
0.25	20.29	670.1	664.9	661.9	-0.20	-0.10	-0.38	15.29	-13.1	-47.9	-53.3	0.51	0.22	-85.1	-111.7	-132.6	-152.2	2.0	-97.56
0.50	18.13	675.0	669.9	667.2	-0.21	-0.11	-0.40	15.30	-13.1	-47.9	-52.3	0.38	0.22	-87.6	-112.2	-132.6	-152.3	3.5	-103.16
0.75	16.64	679.4	674.5	671.9	-0.21	-0.12	-0.40	15.31	-13.1	-47.9	-52.1	0.31	0.23	-88.2	-112.1	-132.8	-153.3	6.0	-108.33
1.00	15.55	683.4	678.6	676.2	-0.22	-0.13	-0.41	15.32	-13.1	-47.6	-49.2	0.26	0.24	-88.4	-112.9	-133.1	-152.8	8.5	-111.40
1.25	14.72	687.3	682.5	680.1	-0.23	-0.14	-0.42	15.33	-13.2	-47.4	-49.2	0.23	0.25	-88.4	-112.4	-132.9	-152.3	10.0	-112.84
1.50	14.08	690.9	686.2	683.9	-0.24	-0.16	-0.44	15.33	-13.2	-46.5	-49.3	0.20	0.25	-88.8	-112.5	-133.1	-152.7	20.8	-119.36
1.75	13.55	694.4	689.7	687.5	-0.25	-0.17	-0.45	15.34	-13.2	-46.5	-48.2	0.18	0.25	-88.7	-112.8	-133.2	-152.0	35.5	-123.99
2.00	13.12	697.8	693.1	690.9	-0.27	-0.19	-0.46	15.34	-13.1	-46.6	-47.6	0.16	0.26	-89.0	-112.7	-133.0	-151.5	60.7	-128.51
2.25	12.76	701.0	696.4	694.2	-0.29	-0.21	-0.48	15.35	-13.1	-45.5	-47.4	0.14	0.26	-88.8	-112.9	-133.3	-152.8	86.7	-131.76
2.50	12.47	704.2	699.6	697.4	-0.31	-0.23	-0.50	15.35	-13.1	-45.8	-46.7	0.13	0.26	-89.0	-112.3	-133.3	-152.9	100.0	-133.03
2.75	12.22	707.3	702.7	700.6	-0.33	-0.25	-0.52	15.36	-13.1	-45.6	-45.4	0.12	0.26	-88.7	-113.0	-133.4	-152.0	177.0	-137.77
3.00	12.02	710.4	705.7	703.6	-0.35	-0.28	-0.54	15.36	-13.1	-46.2	-45.4	0.11	0.26	-88.9	-113.0	-133.2	-151.7	211.6	-139.46
3.25	11.85	713.4	708.7	706.7	-0.38	-0.30	-0.56	15.37	-13.2	-46.2	-45.2	0.10	0.27	-88.7	-112.9	-133.3	-152.2	302.4	-142.49
3.50	11.70	716.3	711.7	709.6	-0.40	-0.33	-0.58	15.38	-13.3	-45.2	-44.5	0.10	0.28	-89.1	-113.1	-133.3	-152.2	361.5	-144.14
3.75	11.58	719.3	714.6	712.6	-0.43	-0.35	-0.61	15.37	-13.3	-45.8	-44.2	0.09	0.28	-89.5	-112.9	-133.3	-151.9	507.5	-146.79
4.00	11.49	722.2	717.5	715.5	-0.46	-0.38	-0.63	15.38	-13.3	-45.3	-44.0	0.09	0.28	-88.9	-112.7	-133.1	-152.1	606.7	-148.10
4.25	11.41	725.1	720.4	718.3	-0.49	-0.41	-0.66	15.39	-13.4	-44.5	-43.8	0.08	0.28	-89.3	-112.7	-133.2	-152.6	851.6	-150.58
4.50	11.35	727.9	723.2	721.2	-0.51	-0.43	-0.68	15.39	-13.4	-45.2	-43.0	0.08	0.29	-89.6	-113.0	-133.3	-152.4	1000.0	-151.02

*at 25°C unless mentioned otherwise

