

BLUE CELL™ Surface Mount Frequency Mixer

MBA-9H

Level 17 (LO Power +17 dBm) 800 to 1000 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	200mW
IF Current	40mA

Pin Configuration

LO	10
RF	5
IF	3
GROUND	1,4,7,8,9
ISOLATE	2,6

Outline Drawing

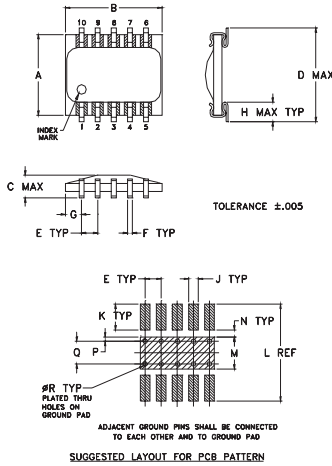

Outline Dimensions (inch/mm)


A	B	C	D	E	F	G	H	J
.250	.300	.070	.290	.050	.015	.050	.060	.030
6.35	7.62	1.78	7.37	1.27	.38	1.27	1.52	.76
K	L	M	N	P	Q	R	wt.	
.080	.300	.100	.020	.015	.070	.014	grams	
2.03	7.62	2.54	.51	.38	1.78	.36	.3	

Features

- excellent temperature stability
- performance repeatability
- solder plated leads with strain relief
- very low cost
- ultra low height, 0.07"

Applications

- cellular
- WLAN
- ISM band
- PCMCIA



CASE STYLE: SM2
PRICE: \$9.95 ea. QTY.: (10-49)

Electrical Specifications

MODEL NO.	FREQUENCY (MHz)		CONVERSION LOSS (dB)		LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)			IP3@ center band Typ. (dBm)
	LO/RF $f_L - f_U$	IF x	Mid-Band m	Total Range σ	L	M	U	L	M	U	
MBA-9H	800-1000	DC-200	6.4	0.3	—	9.0	24(typ.)	19(min.)	17(typ.)	12(min.)	18

1 dB COMP.: +10 dBm typ.
L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]
m = mid band [$2f_L$ to $f_U/2$]


Typical Performance Data

Frequency		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR LO port (:1)	VSWR RF port (:1)
RF MHz	LO MHz	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm
800.00	830.00	7.83	26.00	16.40	2.01	2.84
810.00	840.00	7.66	25.90	16.30	2.03	2.76
820.00	850.00	7.54	25.80	16.20	2.03	2.84
830.00	860.00	7.56	25.70	16.20	2.06	2.84
840.00	870.00	7.43	25.60	16.30	2.06	2.88
850.00	880.00	7.40	25.60	16.50	2.04	2.92
860.00	890.00	7.39	25.80	16.50	2.01	2.92
870.00	900.00	7.25	25.50	16.50	1.96	2.88
880.00	910.00	7.31	25.10	16.40	1.91	2.84
890.00	920.00	7.11	24.90	16.40	1.88	2.80
900.00	930.00	7.01	24.90	16.30	1.88	2.76
910.00	940.00	6.87	24.80	16.20	1.89	2.72
920.00	950.00	6.77	24.90	16.30	1.91	2.61
930.00	960.00	6.65	25.10	16.30	1.88	2.58
940.00	970.00	6.54	25.20	16.30	1.88	2.58
950.00	980.00	6.52	25.20	16.30	1.89	2.52
960.00	990.00	6.35	25.20	16.10	1.87	2.49
970.00	1000.00	6.27	24.90	16.00	1.87	2.46
980.00	1010.00	6.16	24.90	15.80	1.81	2.46
1000.00	1030.00	6.15	25.10	15.60	1.80	2.52

BLUE CELL™ is protected by U.S. Patents 5,534,830 5,640,132 5,640,134 5,640,699


MBA-9H

CONVERSION LOSS

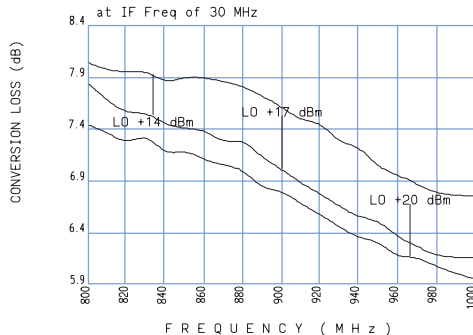


MBA-9H

ISOLATION L - R

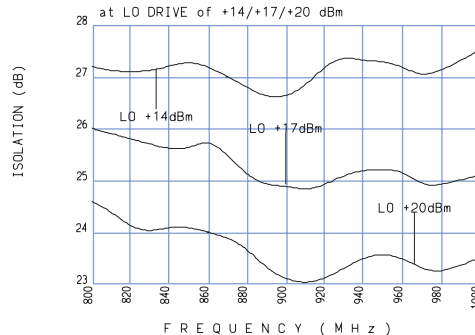

MBA-9H

VSWR

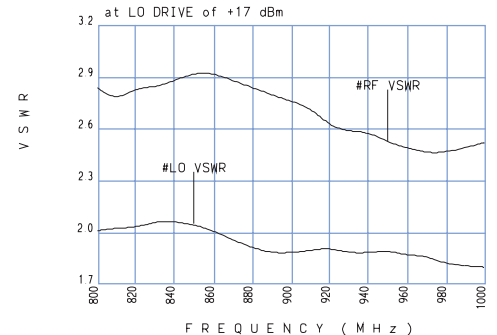

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

ISO 9001 CERTIFIED

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

REV. A
M79100
EE-7756/27
MBA-9H
RD/TD/CP
011116

Frequency Mixer

MBA-9H

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)			LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
		@LO (dBm)				@LO (dBm)			@LO (dBm)		
		+14	+17	+20		+14	+17	+20	+14	+17	+20
730.0	760.0	8.31	8.11	7.91	760.0	27.2	26.70	25.80	18.20	16.70	15.90
800.0	830.0	8.03	7.83	7.43	830.0	27.2	26.00	24.60	17.50	16.40	15.80
810.0	840.0	7.96	7.66	7.36	840.0	27.1	25.90	24.40	17.40	16.30	15.60
820.0	850.0	7.94	7.54	7.24	850.0	27.1	25.80	24.10	17.20	16.20	15.40
830.0	860.0	7.96	7.56	7.36	860.0	27.1	25.70	24.00	17.30	16.20	15.50
840.0	870.0	7.83	7.43	7.13	870.0	27.2	25.60	24.10	17.30	16.30	15.70
850.0	880.0	7.90	7.40	7.20	880.0	27.3	25.60	24.10	17.40	16.50	15.90
860.0	890.0	7.89	7.39	7.09	890.0	27.2	25.80	24.00	17.30	16.50	16.10
870.0	900.0	7.85	7.25	7.05	900.0	27.0	25.50	23.90	17.10	16.50	16.20
880.0	910.0	7.81	7.31	7.01	910.0	26.8	25.10	23.70	16.90	16.40	16.10
890.0	920.0	7.71	7.11	6.81	920.0	26.6	24.90	23.30	16.70	16.40	16.00
900.0	930.0	7.61	7.01	6.81	930.0	26.6	24.90	23.10	16.50	16.30	15.80
910.0	940.0	7.47	6.87	6.67	940.0	26.8	24.80	23.00	16.40	16.20	15.90
920.0	950.0	7.47	6.77	6.57	950.0	27.2	24.90	23.10	16.40	16.30	16.00
930.0	960.0	7.25	6.65	6.45	960.0	27.4	25.10	23.30	16.30	16.30	16.10
940.0	970.0	7.24	6.54	6.34	970.0	27.3	25.20	23.50	16.10	16.30	16.40
950.0	980.0	7.02	6.52	6.32	980.0	27.3	25.20	23.60	15.90	16.30	16.50
960.0	990.0	6.95	6.35	6.15	990.0	27.2	25.20	23.50	15.60	16.10	16.40
970.0	1000.0	6.87	6.27	6.17	1000.0	27.0	24.90	23.30	15.30	16.00	16.20
980.0	1010.0	6.76	6.16	6.06	1010.0	27.1	24.90	23.20	15.10	15.80	16.10
990.0	1020.0	6.79	6.19	5.99	1020.0	27.4	25.00	23.30	15.00	15.70	16.00
1000.0	1030.0	6.75	6.15	5.95	1030.0	27.5	25.10	23.50	14.80	15.60	16.20
1060.0	1090.0	6.75	6.25	6.05	1090.0	27.2	25.00	23.80	13.50	15.00	16.30
1170.0	1200.0	6.12	5.72	5.62	1200.0	27.0	25.80	24.70	12.20	14.00	15.90
1280.0	1310.0	5.90	5.50	5.40	1310.0	24.3	25.30	26.10	11.60	13.50	15.50
1390.0	1420.0	5.93	5.53	5.43	1420.0	24.0	25.20	26.30	11.10	12.90	14.20
1500.0	1530.0	5.81	5.51	5.51	1530.0	23.2	24.30	24.80	10.60	12.00	12.90



P.O. Box 350188, Brooklyn, New York 11235-0000 (718) 934-4500 Fax (718) 332-4851 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MIN-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS



Frequency Mixer


MBA-9H

Typical Performance Data


RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+14	+17	+20		+14	+17	+20		+14	+17	+20
730.0	760.0	3.01	2.88	2.80	760.0	2.49	2.46	2.88	0.1	1.09	1.31	1.43
800.0	830.0	3.06	2.84	2.65	830.0	1.91	2.01	2.43	0.3	1.08	1.30	1.43
810.0	840.0	2.96	2.76	2.58	840.0	1.89	2.03	2.43	0.5	1.06	1.28	1.40
820.0	850.0	3.11	2.84	2.65	850.0	1.88	2.03	2.52	0.8	1.04	1.26	1.38
830.0	860.0	3.06	2.84	2.65	860.0	1.88	2.06	2.55	1.0	1.03	1.26	1.38
840.0	870.0	3.11	2.88	2.68	870.0	1.89	2.06	2.61	5.0	1.05	1.27	1.38
850.0	880.0	3.16	2.92	2.72	880.0	1.87	2.04	2.58	10.0	1.05	1.28	1.39
860.0	890.0	3.16	2.92	2.68	890.0	1.87	2.01	2.52	20.0	1.06	1.27	1.38
870.0	900.0	3.16	2.88	2.68	900.0	1.82	1.96	2.40	30.0	1.07	1.26	1.37
880.0	910.0	3.16	2.84	2.61	910.0	1.78	1.91	2.32	36.8	1.08	1.26	1.38
890.0	920.0	3.16	2.80	2.55	920.0	1.76	1.88	2.32	50.0	1.09	1.23	1.34
900.0	930.0	3.11	2.76	2.49	930.0	1.75	1.88	2.32	70.0	1.13	1.21	1.32
910.0	940.0	3.06	2.72	2.40	940.0	1.76	1.89	2.40	73.4	1.14	1.21	1.30
920.0	950.0	3.11	2.61	2.35	950.0	1.81	1.91	2.43	100.0	1.23	1.20	1.27
930.0	960.0	3.06	2.58	2.30	960.0	1.82	1.88	2.37	110.0	1.27	1.21	1.27
940.0	970.0	3.06	2.58	2.25	970.0	1.85	1.88	2.37	130.0	1.35	1.23	1.26
950.0	980.0	2.96	2.52	2.23	980.0	1.85	1.89	2.37	140.0	1.40	1.24	1.26
960.0	990.0	2.96	2.49	2.20	990.0	1.82	1.87	2.32	146.7	1.42	1.26	1.26
970.0	1000.0	2.92	2.46	2.18	1000.0	1.78	1.87	2.30	150.0	1.44	1.27	1.26
980.0	1010.0	2.92	2.46	2.18	1010.0	1.71	1.81	2.27	170.0	1.55	1.35	1.30
990.0	1020.0	2.92	2.49	2.23	1020.0	1.71	1.80	2.25	183.4	1.63	1.40	1.34
1000.0	1030.0	2.92	2.52	2.27	1030.0	1.75	1.80	2.27	190.0	1.67	1.43	1.36
1060.0	1090.0	2.92	2.76	2.58	1090.0	1.74	1.81	2.35	200.0	1.73	1.47	1.39
1170.0	1200.0	2.20	2.14	2.08	1200.0	1.56	1.73	2.27	220.1	1.87	1.59	1.48
1280.0	1310.0	1.85	1.69	1.63	1310.0	1.43	1.70	2.30	256.7	2.14	1.82	1.68
1390.0	1420.0	1.70	1.59	1.58	1420.0	1.37	1.85	2.58	293.4	2.46	2.12	1.94
1500.0	1530.0	1.85	1.91	1.97	1530.0	1.37	1.75	2.55	330.0	2.80	2.40	2.23

Typical Performance Curves


Conversion Loss @ IF=30MHz

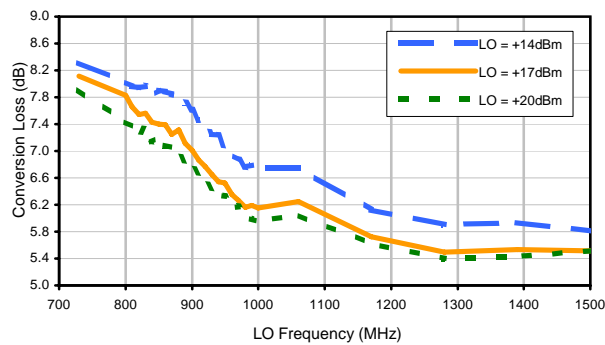


LO-RF Isolation

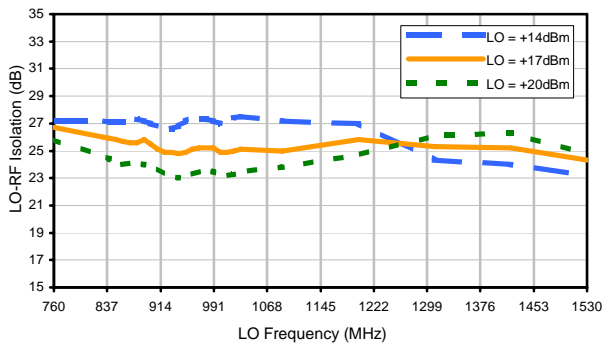


LO-IF Isolation

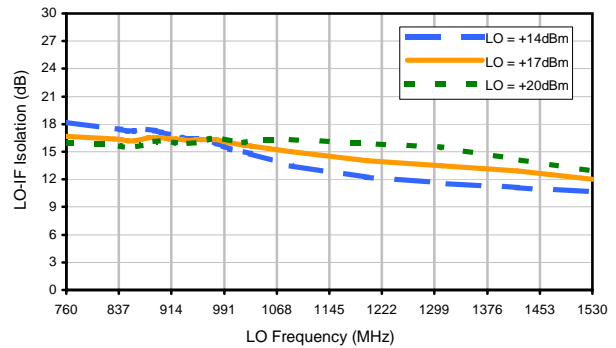


RF VSWR

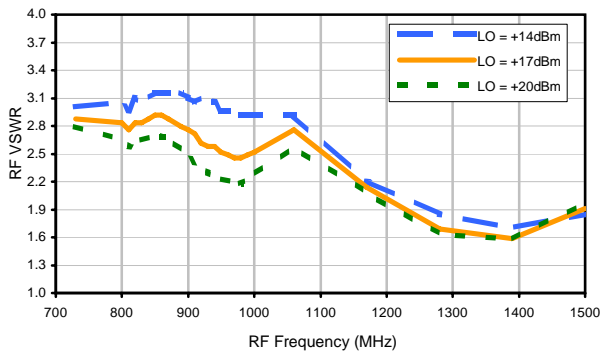

LO VSWR

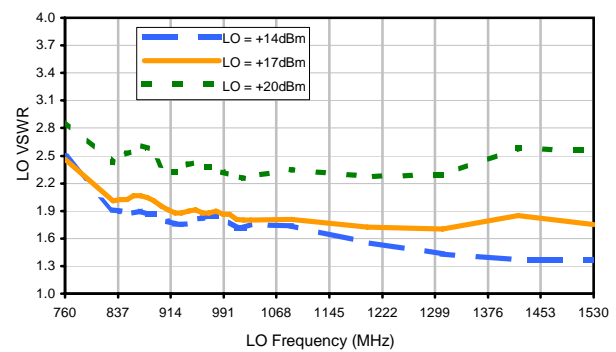

IF VSWR

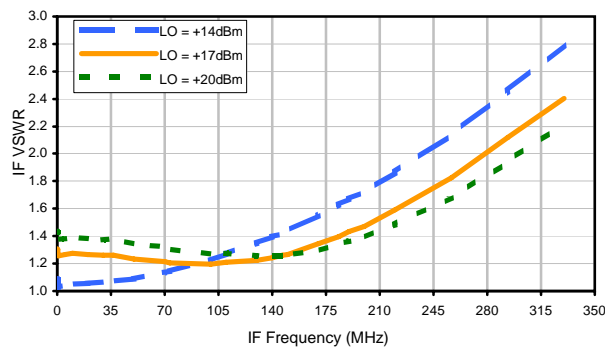


Case Style


SM2

SM2

Outline Dimensions

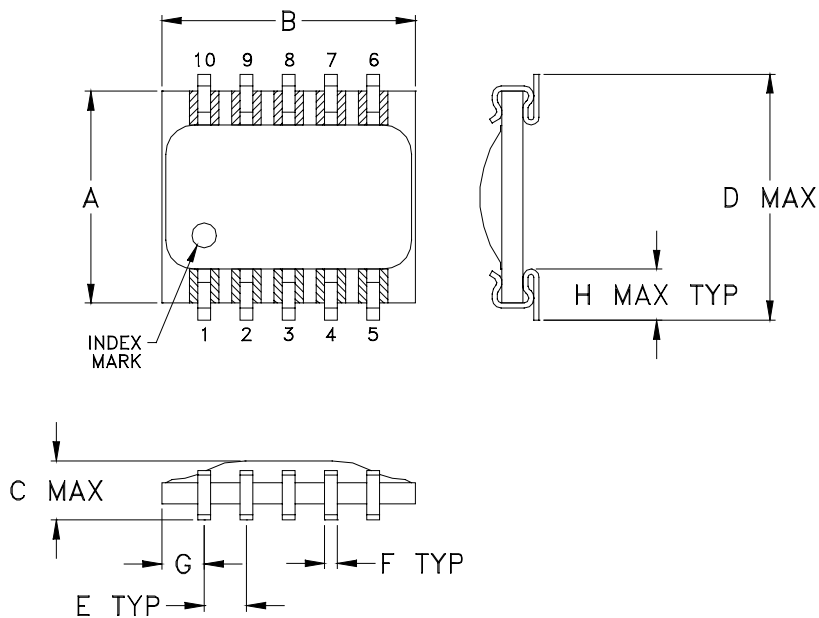

PCB Land Pattern

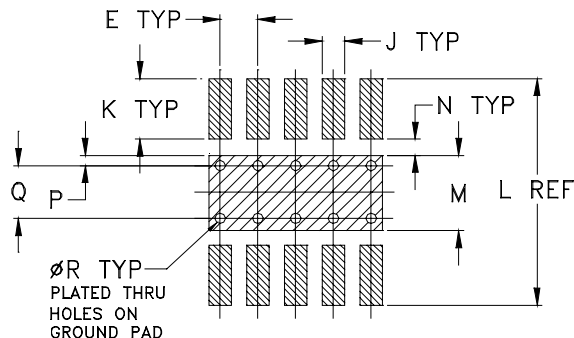

Suggested Layout,
Tolerance to be within ± 0.002

ADJACENT GROUND PINS SHALL BE CONNECTED
TO EACH OTHER AND TO GROUND PAD

CASE #	A	B	C	D	E	F	G	H	J	K	L	M	N	P
SM2	.250 (6.35)	.300 (7.62)	.095 (2.41)	.290 (7.37)	.050 (1.27)	.015 (0.38)	.050 (1.27)	.060 (1.52)	.030 (0.76)	.080 (2.03)	.300 (7.62)	.100 (2.54)	.020 (0.51)	.015 (0.38)

CASE #	Q	R	WT. GRAM
SM2	.070 (1.78)	.014 (0.36)	.3

Dimensions are in inches (mm). Tolerances: $\pm .005$

Notes:

1. Case material: Plastic encapsulation on Ceramic base.
2. Termination finish:
For RoHS Case Styles: Tin plate over Nickel plate.
For RoHS-5 Case Styles: Tin-Lead plate.




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

Tape & Reel Packaging TR-F34

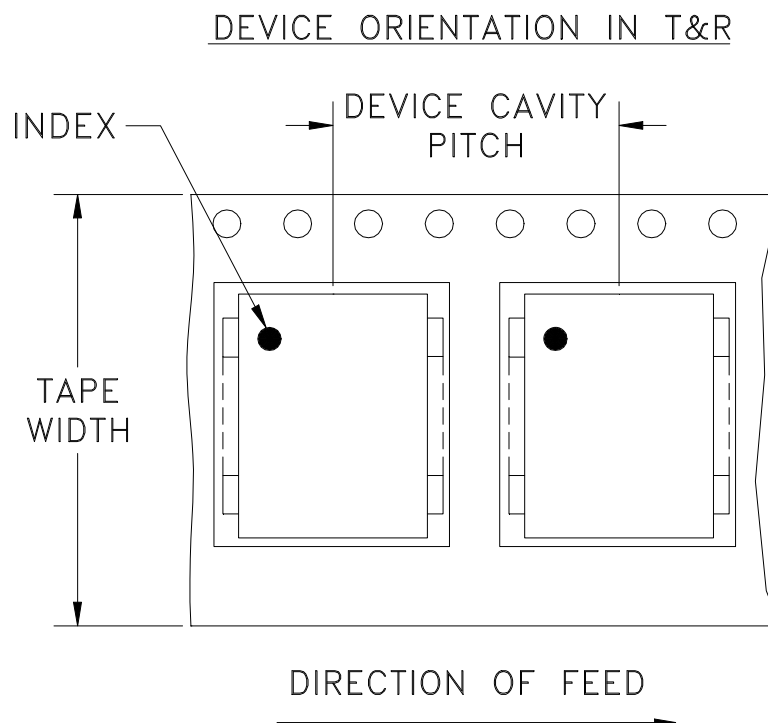

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note	
16	12	7	Small quantity standard (see note)	20
				50
				100
				200
		13	Standard	500
				1000

Note: Availability of small reel quantity varies by model.
Refer to pricing and availability on individual model dashboard.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M82272	NEW RELEASE	08/02/02	GF	DJ
A	M102713	UPDATED NOTES, ADDED "...WITH SMOBC"	01/16/06	GT	IL

SUGGESTED MOUNTING CONFIGURATION FOR SM2 CASE STYLE, "Id" PIN CONNECTION

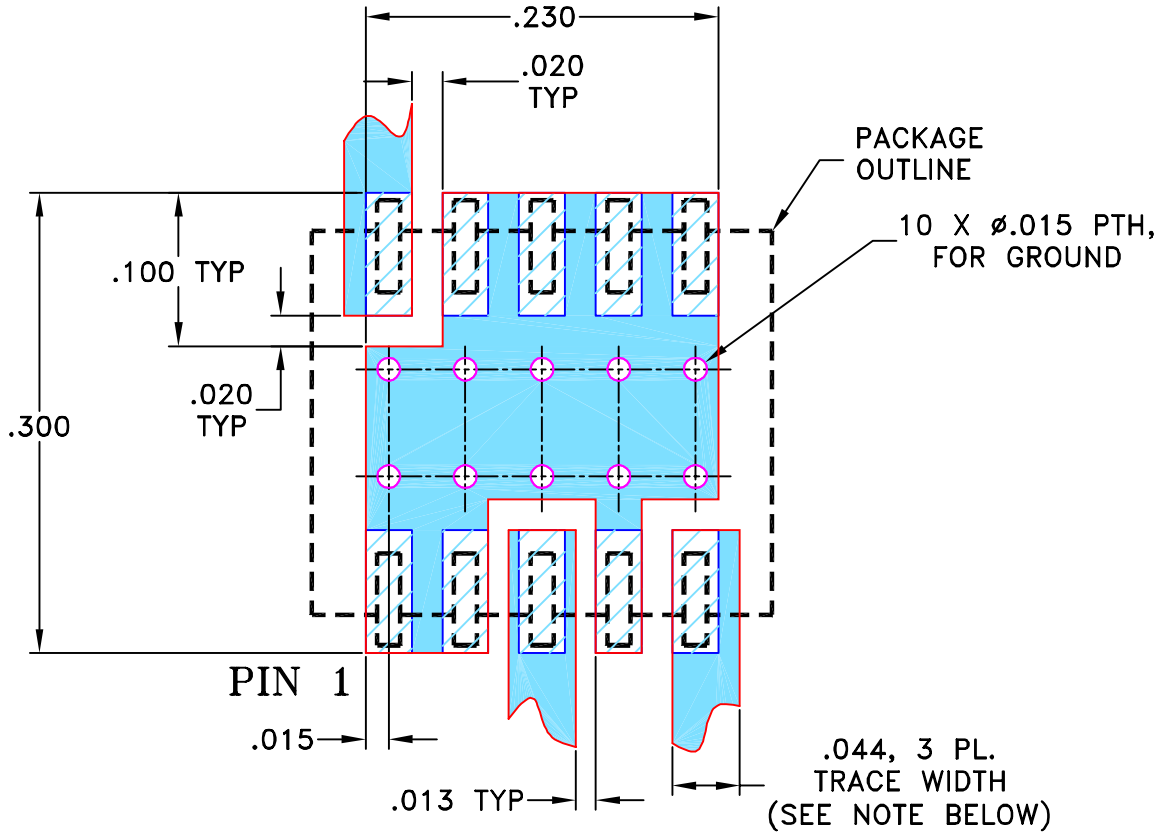

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.


 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED	INITIALS	DATE
DRAWN	GF	07/18/02
CHECKED	WL	08/02/02
APPROVED	DJ	08/02/02


 **Mini-Circuits**[®] 13 Neptune Avenue
Brooklyn NY 11235

PL, Id, SM2, MBA, TB-99


 Mini-Circuits[®]
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-066	A
FILE:	98PL066	SCALE: 8:1	SHEET: 1 OF 1

Evaluation Board and Circuit

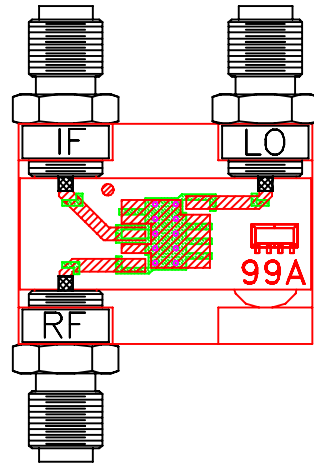


TB-99

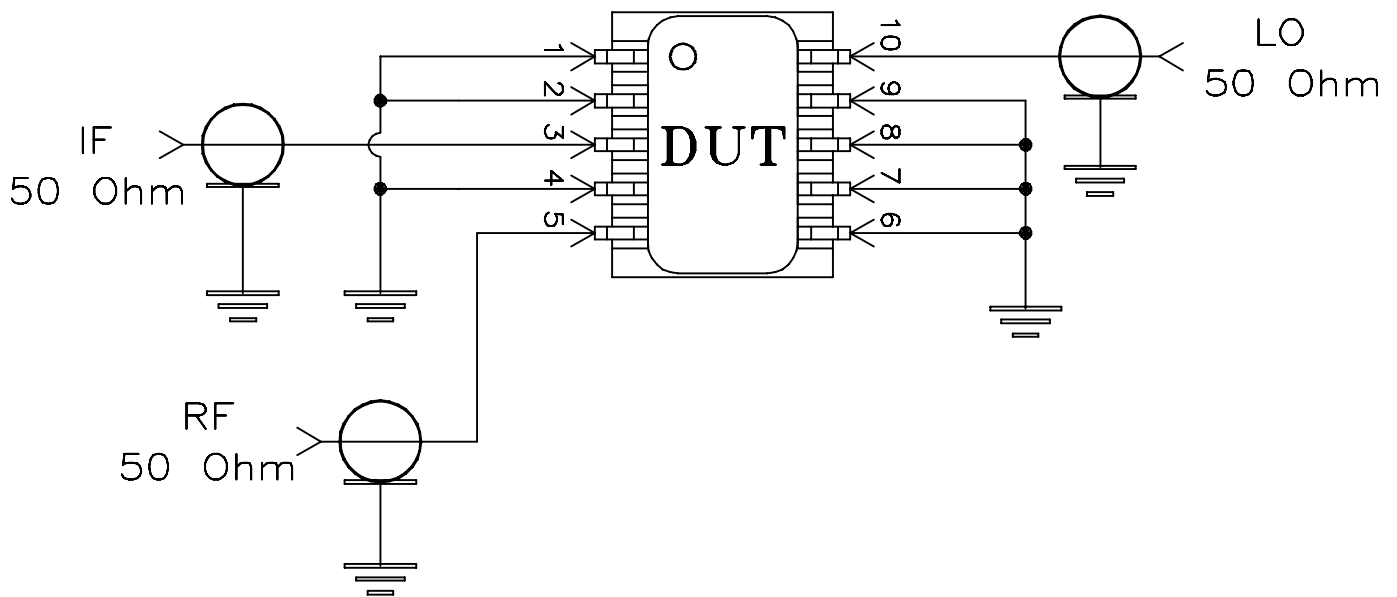

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent, Dielectric Constant=3.5, Thickness=.020 inch.

 Mini-Circuits®



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215