



USB & ETHERNET CONTROLLED

# RF Switch Matrix

## RC-2SPDT-A18

50Ω DC to 18 GHz

### THE BIG DEAL

- 2 x mechanical terminated SPDT switches
- 40W power rating (cold switching)
- High isolation, 85 dB typ.
- High reliability

### APPLICATIONS

- Fail safe / redundancy switching
- Automated test equipment
- Satcom switching



CASE STYLE: LM1849

[DOWNLOAD](#) SOFTWARE PACKAGE

**RoHS Compliant**

See our website for RoHS Compliance methodologies and qualifications

### PRODUCT OVERVIEW

Mini-Circuits' RC-2SPDT-A18 houses 2 independently controlled electro-mechanical SPDT switches. Each switch operates over an extremely wide bandwidth, from DC to 18 GHz with high isolation and low insertion loss. The absorptive switches are fail safe and break before make configuration, with a lifetime of 5 million switching cycles per switch when used within the noted specifications.

The switch box is constructed in a compact, rugged metal case (4.5 x 6.0 x 2.25") with all SMA (f) RF connectors on the front panel. The switches are controlled via USB or Ethernet, allowing control directly from a PC, or remotely over a network. Full software support is provided, including our user friendly GUI application for Windows and a full API with programming instructions for Windows and Linux environments (both 32 bit and 64 bit systems).

### KEY FEATURES

Feature	Advantages
Mechanical SPDT Switch	Mechanical absorptive switches provide high reliability, repeatable high performance and internal termination of input signals on the disconnected paths
High power operation from DC to 18 GHz	Supports a wide range of RF test and signal routing applications up to X and Ku bands, with 40W input power.
Break-before make configuration	Prevents a momentary connection of the old and new signal paths, reducing the inconsistent transient effects that could otherwise be observed during switching
USB & Ethernet control	USB HID and Ethernet (HTTP / Telnet) interfaces provide easy compatibility with a wide range of software setups and programming environments
Full software support	User friendly Windows GUI (graphical user interface) allows manual control straight out of the box, while the comprehensive API (application programming interface) with examples and instructions allows easy automation in most programming environments

REV. G  
ECO-007681  
EDR-10927/10F4  
RC-2SPDT-A18  
RAV/MCL NY  
240325





## ELECTRICAL SPECIFICATIONS

Parameter	Conditions (GHz)	Min.	Typ.	Max.	Units
Frequency	—	DC		18	GHz
RF Insertion Loss (per switch)	DC to 1	—	0.10	0.15	dB
	1 to 8	—	0.15	0.30	
	8 to 12	—	0.25	0.40	
	12 to 18	—	0.30	0.50	
RF VSWR	DC to 1	—	1.05	—	:1
	1 to 8	—	1.20	—	
	8 to 12	—	1.20	—	
	12 to 18	—	1.25	—	
RF Isolation (per switch)	DC to 1	85	100	—	dB
	1 to 8	75	90	—	
	8 to 12	70	80	—	
	12 to 18	60	66	—	
Switching Time	—	—	15	—	ms
RF Power (cold switching) <sup>1</sup>	—	—	—	40	W
Rated Voltage	24V <sub>DC</sub> input USB port	23	24	25	V
		—	5	—	
Rated Current (24V <sub>DC</sub> input)	All switches in COM -> 2 position	—	500	—	mA
	All switches in COM -> 1 position	—	90	120	
Rated Current (USB port)		—	10	20	
Life (per switch)	@ 100 mW (hot switching) <sup>2</sup>	—	5	—	million switching cycles
	@ 1 W (hot switching)	—	1	—	

1. Maximum power for any connected through path as stated; maximum power into any internal termination is 1W

2. Hot switching powers above this level will degrade the switch lifetime

MAXIMUM RATINGS<sup>3</sup>


Operating Temperature	0°C to 40°C
Storage Temperature	-15°C to 85°C
DC Voltage max.	26V

<sup>3</sup> Permanent damage may occur if any of these limits are exceeded.



### SWITCHING CONFIGURATION (PER SWITCH):




- Fail-Safe
- Absorptive (Internal terminations on ports J1-J2)

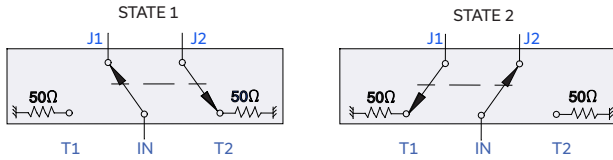

### CONNECTIONS

RF Switch A (1, COM, 2)	SMA female
RF Switch B (1, COM, 2)	SMA female
USB	USB type B receptacle
24V <sub>DC</sub> IN	2.1 mm center positive DC Socket
Network (Ethernet/LAN)	(RJ45 socket)

### OUTLINE DRAWING (LM1849)

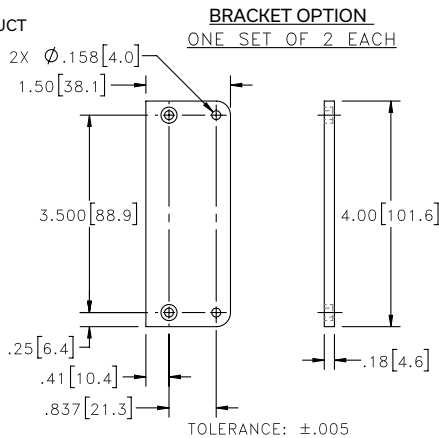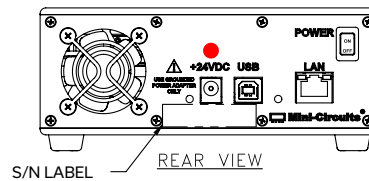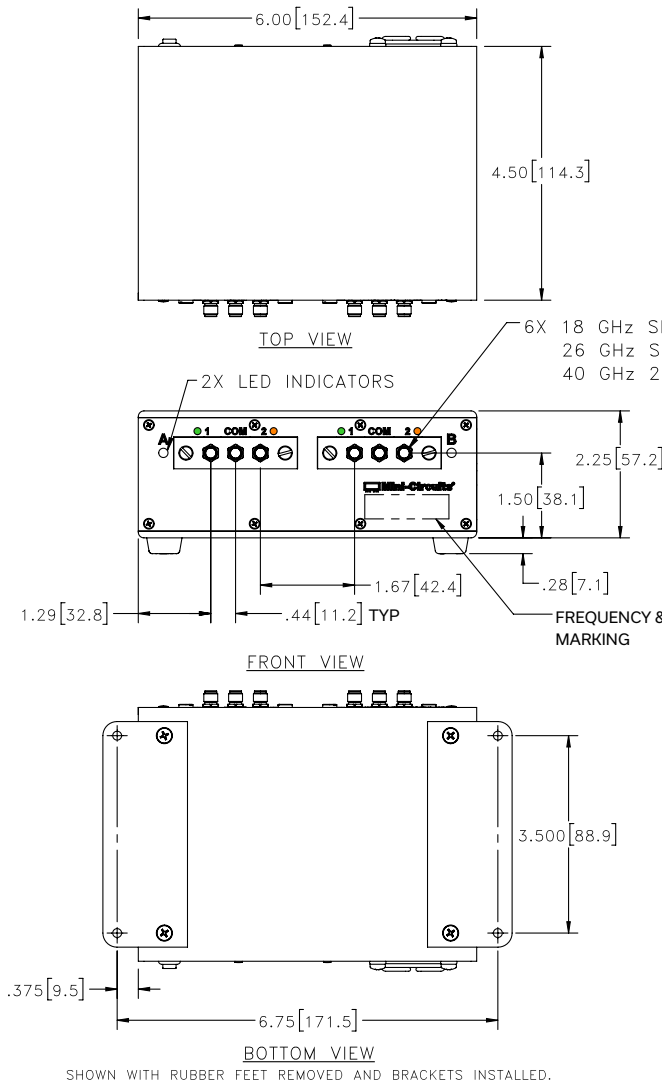

#### INSTRUCTIONS FOR MOUNTING


BRACKETS:  
 TOOL REQUIRED: PHILLIPS HEAD SCREWDRIVER  
 STEP 1: REMOVE RUBBER FEET FROM THE BOTTOM OF THE UNIT. DO NOT DISCARD THE FASTENERS.  
 STEP 2: MOUNT THE BRACKETS WITH THE FASTENERS  
 REMOVED IN STEP 1. USING THE COUNTER BORE HOLES IN THE BRACKET.

Weight: 960 grams.


Dimensions are in inches [mm]. Tolerances: 2 Pl.±.03 inch; 3 Pl.±.015 inch




Insertion Loss

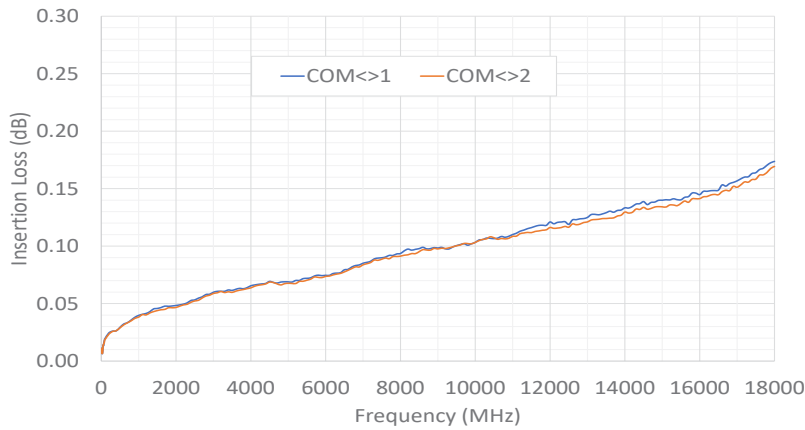

Isolation

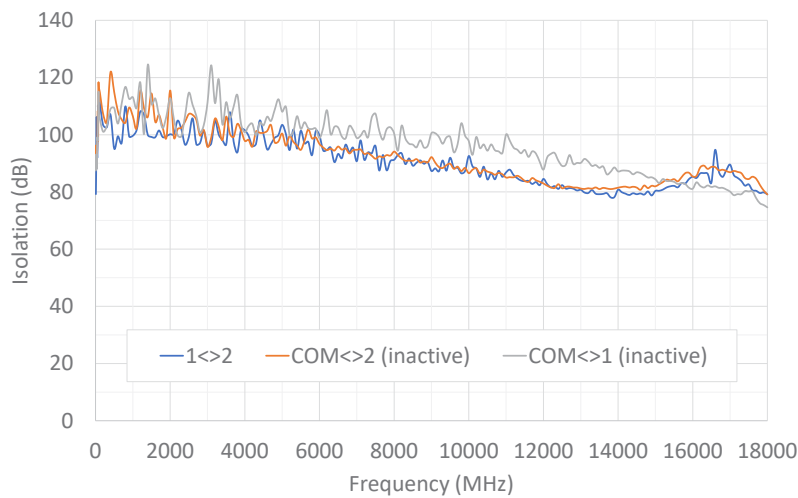

VSWR

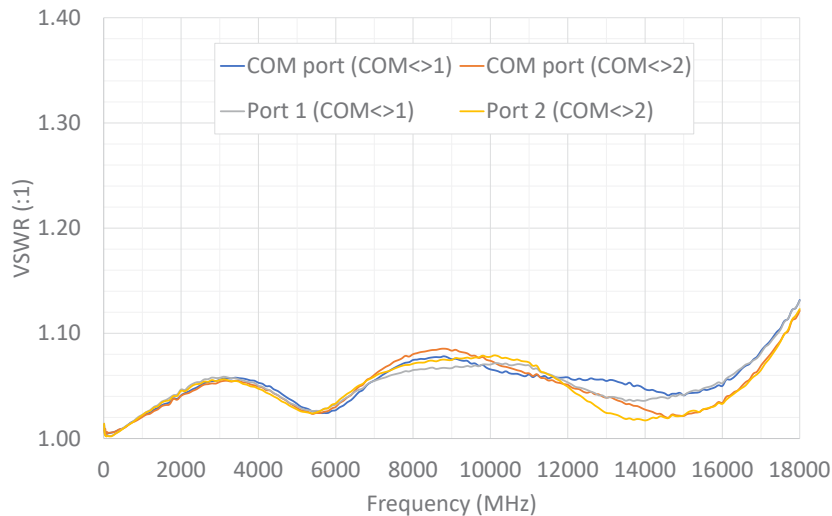




### TYPICAL SWITCHING PERFORMANCE


The graphs below present the typical mechanical switching characteristic from the point of applying the internal DC voltage to the switch actuator (identified by the purple "trigger" trace). USB / Ethernet communication delays are excluded (in the order of several ms , depending on PC / network performance). The break before make process is visible in the sequence of events (the active switch path is disconnected, prior to connecting the final switch path).

Switching from COM<>1 to COM<>2 state: 6.95 ms

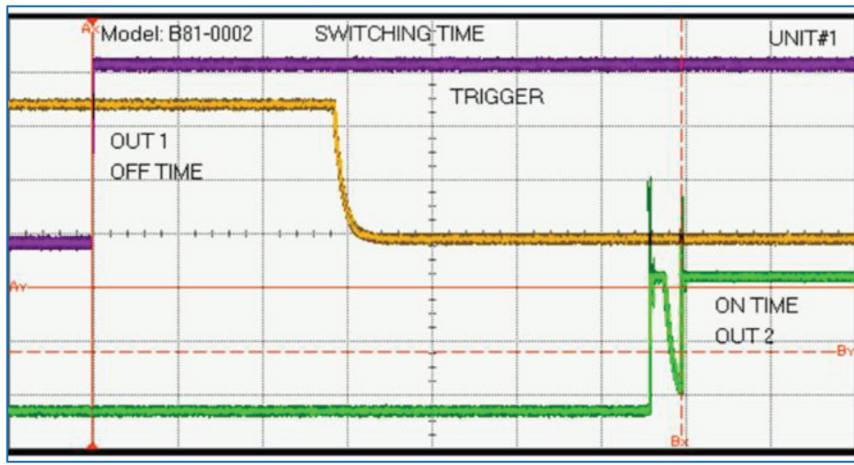

- Trigger
  - COM <> 1 path (off time)
  - COM <> 2 path (on time)
- Horizontal scale: 1 ms per division

Switching from COM<>2 to COM<>1 state: 4.88 ms

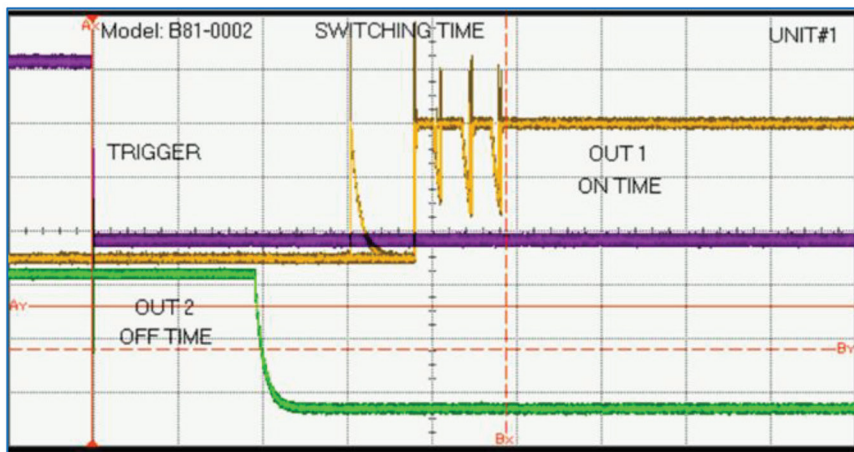

- Trigger
  - COM <> 1 path (on time)
  - COM <> 2 path (off time)
- Horizontal scale: 1 ms per division



### SOFTWARE SPECIFICATIONS

#### SOFTWARE & DOCUMENTATION DOWNLOAD:

- Mini-Circuits' full software and support package including user guide, Windows GUI, DLL files, programming manual and examples can be downloaded free of charge from: <https://www.minicircuits.com/softwaredownload/rfswitchcontroller.html>
- Please contact [testsolutions@minicircuits.com](mailto:testsolutions@minicircuits.com) for support

#### MINIMUM SYSTEM REQUIREMENTS:

Parameter	Requirements	
Interface	USB HID & Ethernet (HTTP & Telnet)	
System Requirements	GUI	Windows 98 or later
	USB API DLL	Windows 98 or later and programming environment with ActiveX or .NET support
	USB Direct Programming	Linux, Windows 98 or later
	Ethernet	Windows, Linux or Mac computer with a network port and Ethernet TCP/IP support
Hardware	Pentium II or later with 256 MB RAM	

#### APPLICATION PROGRAMMING INTERFACE (API)

##### ETHERNET SUPPORT:

- Simple ASCII / SCPI command set for attenuator control
- Communication via HTTP or Telnet
- Supported by most common programming environment

##### USB SUPPORT (WINDOWS):

- ActiveX COM DLL file for creation of 32-bit programs
- .NET library DLL file for creation of 32 / 64-bit programs
- Supported by most common programming environments (refer to application note AN-49-001 for summary of supported environments)

##### USB SUPPORT (LINUX):


- Direct USB programming using a series of USB interrupt codes

Full programming instructions and examples available for a wide range of programming environments / languages.




### GRAPHICAL USER INTERFACE (GUI) FOR WINDOWS - KEY FEATURES

- Connect via USB or Ethernet
- Run GUI in "demo mode" to evaluate software without a hardware connection

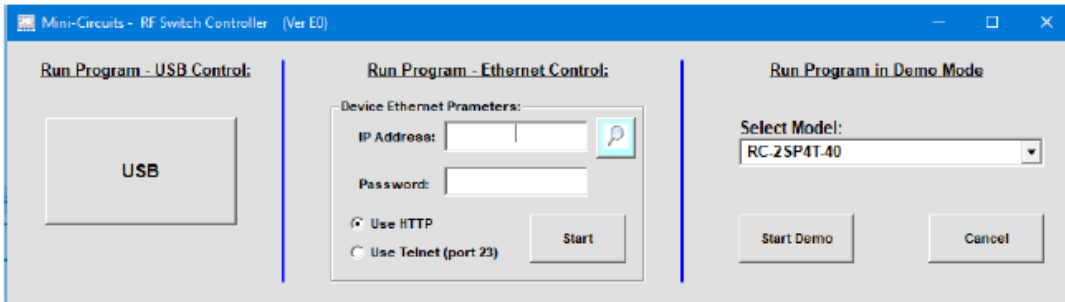

- View and set switch states at the click of a button
- Configure and run timed switching sequences
- Set start-up switch state
- Configure Ethernet IP Settings

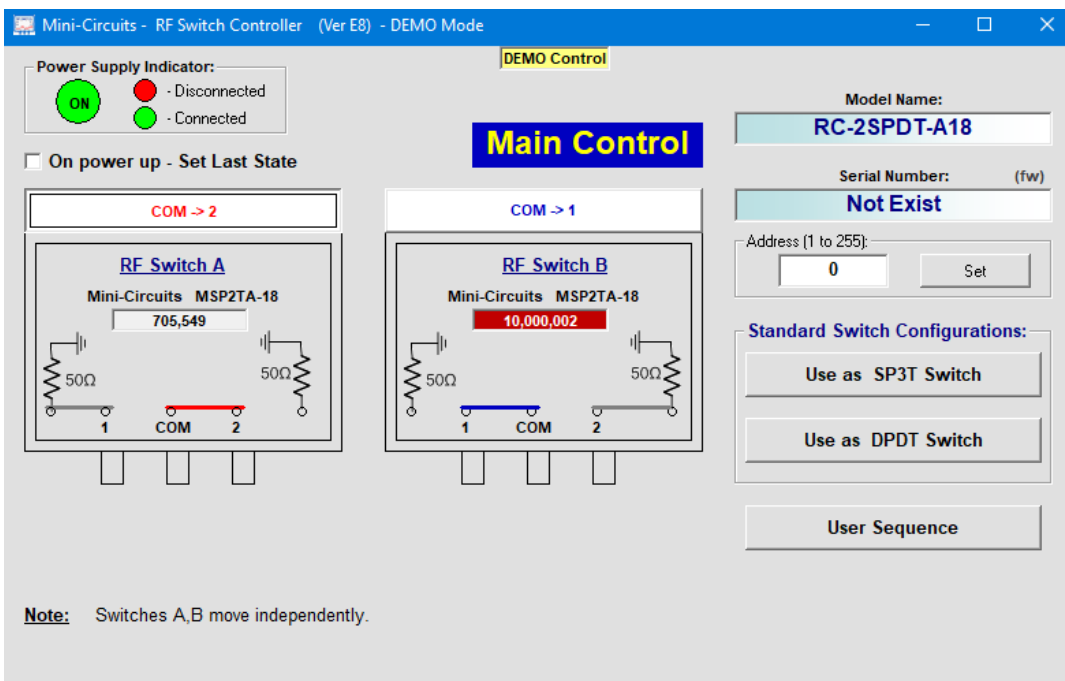








**ORDERING INFORMATION**

Refer to Mini-Circuits' website for pricing and availability information:

[www.minicircuits.com/WebStore/dashboard.html?model=RC-2SPDT-A18](http://www.minicircuits.com/WebStore/dashboard.html?model=RC-2SPDT-A18)

Model	Description
RC-2SPDT-A18	USB/Ethernet RF SPDT Switch Matrix

Included Accessories	Part No.	Description
	AC/DC-24-3W1	AC/DC 24V <sub>DC</sub> Grounded Power Adaptor. Operating temperature: 0°C to +40°C, I <sub>Max</sub> =2.5A
See Below	CBL-3W1-XX	AC Power Cord (Select one power cord from below with each Switch Matrix box)
	USB-CBL-AB-3+	2.7 ft (0.8 m) USB Cable: USB type A(Male) to USB type B(Male)

AC Power Cords <sup>5</sup>	Part No.	Description
	CBL-3W1-US	Power Cord for United States
	CBL-3W1-EU	Power Cord for Europe
	CBL-3W1-UK	Power Cord for United Kingdom
	CBL-3W1-AU	Power Cord for Australia and China
	CBL-3W1-IL	Power Cord for Israel

5. If you need a Power cord for a country not listed please contact [testsolutions@minicircuits.com](mailto:testsolutions@minicircuits.com)**OPTIONAL ACCESSORIES**

USB-CBL-AB-3+	2.7 ft (0.8 m) USB Cable: USB type A(Male) to USB type B(Male)
USB-CBL-AB-7+	6.8 ft (2.1 m) USB Cable: USB type A(Male) to USB type B(Male)
USB-CBL-AB-11+	11 ft (3.4 m) USB Cable: USB type A(Male) to USB type B(Male)
CBL-RJ45-MM-5+	5 ft (1.5 m) Ethernet cable: RJ45(Male) to RJ45(Male) Cat 5E cable
BKT-272-08+	Bracket (One set of 2 each)

- NOTES**
- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
  - Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
  - The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Xtra Long Life USB/Ethernet RF SPDT

# RC-2SPDT-A18

## Typical Performance Data

TEST CONDITIONS: @Temperature = 0degC

FREQUENCY (MHz)	INSERTION LOSS ON (dB)		ISOLATION OFF (dB)		VSWR COM (:1)		VSWR COM->2 (:1)		VSWR COM->1 (:1)	
	COM-1	COM-2	COM-1	COM-2	ON	OFF	1	2	1	2
10	0.00	0.03	86.47	88.00	1.01	1.02	1.00	1.01	1.01	1.00
20	0.01	0.02	86.71	94.34	1.00	1.01	1.00	1.01	1.01	1.00
30	0.02	0.03	95.20	91.79	1.01	1.00	1.00	1.00	1.00	1.00
40	0.02	0.03	89.17	94.92	1.01	1.01	1.00	1.01	1.01	1.00
50	0.02	0.01	89.87	85.48	1.01	1.01	1.00	1.01	1.01	1.00
60	0.02	0.01	89.13	100.00	1.01	1.01	1.01	1.01	1.01	1.00
70	0.02	0.01	90.24	89.73	1.01	1.01	1.01	1.01	1.01	1.00
80	0.02	0.00	106.15	95.21	1.01	1.01	1.01	1.01	1.01	1.00
90	0.02	0.00	93.46	88.55	1.01	1.01	1.01	1.01	1.01	1.00
100	0.02	0.01	94.99	95.58	1.01	1.01	1.01	1.01	1.01	1.00
200	0.02	0.01	89.41	91.38	1.01	1.00	1.02	1.00	1.00	1.01
300	0.03	0.00	110.14	99.39	1.00	1.01	1.02	1.01	1.02	1.02
400	0.03	0.01	122.36	96.19	1.01	1.02	1.02	1.02	1.02	1.02
500	0.03	0.01	104.38	99.51	1.02	1.01	1.01	1.01	1.01	1.02
600	0.04	0.01	105.57	98.70	1.02	1.01	1.01	1.01	1.01	1.02
700	0.04	0.02	102.50	99.69	1.01	1.01	1.02	1.01	1.01	1.02
800	0.04	0.02	108.28	102.50	1.01	1.01	1.02	1.02	1.02	1.02
900	0.04	0.02	102.62	104.87	1.01	1.02	1.02	1.02	1.02	1.03
1000	0.05	0.02	104.67	101.83	1.01	1.01	1.02	1.02	1.02	1.03
1200	0.05	0.02	100.28	106.54	1.01	1.01	1.03	1.01	1.01	1.03
1400	0.05	0.02	119.75	106.41	1.02	1.01	1.03	1.01	1.01	1.04
1600	0.05	0.03	106.48	103.81	1.01	1.02	1.04	1.02	1.02	1.04
1800	0.05	0.03	112.91	103.24	1.02	1.03	1.04	1.02	1.02	1.04
2000	0.06	0.03	104.08	107.47	1.02	1.03	1.05	1.02	1.02	1.04
2200	0.06	0.03	103.11	100.85	1.03	1.02	1.05	1.02	1.02	1.05
2400	0.06	0.04	108.97	103.07	1.03	1.04	1.06	1.03	1.04	1.06
2600	0.06	0.04	96.38	96.77	1.03	1.05	1.07	1.04	1.05	1.06
2800	0.06	0.04	118.33	103.19	1.04	1.04	1.08	1.04	1.05	1.07
3000	0.07	0.04	98.89	103.06	1.05	1.04	1.08	1.04	1.04	1.08
3200	0.08	0.05	102.33	101.24	1.05	1.06	1.09	1.06	1.06	1.08
3400	0.07	0.05	105.38	106.43	1.06	1.09	1.11	1.08	1.08	1.10
3600	0.08	0.05	103.90	99.97	1.08	1.08	1.11	1.07	1.08	1.10
4000	0.08	0.06	94.49	98.21	1.11	1.12	1.13	1.11	1.12	1.12
4500	0.10	0.07	107.75	97.44	1.15	1.13	1.14	1.13	1.13	1.13
5000	0.12	0.10	110.57	100.39	1.16	1.20	1.16	1.20	1.20	1.14
5500	0.15	0.11	98.96	98.82	1.22	1.21	1.14	1.20	1.21	1.13
6000	0.15	0.12	96.72	100.63	1.19	1.24	1.14	1.24	1.23	1.14
6500	0.14	0.11	95.37	94.39	1.19	1.21	1.11	1.21	1.21	1.12
7000	0.13	0.12	96.77	100.38	1.18	1.17	1.09	1.18	1.18	1.10
7500	0.13	0.12	99.27	96.75	1.12	1.14	1.07	1.15	1.14	1.09
8000	0.13	0.11	93.55	96.34	1.14	1.11	1.06	1.12	1.11	1.08
8500	0.15	0.13	99.85	93.57	1.10	1.11	1.07	1.12	1.11	1.09
9000	0.16	0.13	93.49	94.68	1.09	1.06	1.06	1.07	1.07	1.07
9500	0.18	0.14	98.09	89.52	1.07	1.09	1.08	1.11	1.11	1.08
10000	0.20	0.15	92.91	97.43	1.05	1.10	1.09	1.09	1.08	1.08
12000	0.28	0.19	92.17	86.14	1.09	1.08	1.12	1.07	1.09	1.08
13000	0.31	0.23	89.54	87.24	1.14	1.10	1.20	1.07	1.11	1.14
14000	0.33	0.27	87.65	83.67	1.11	1.09	1.26	1.12	1.15	1.21
15000	0.38	0.35	83.89	81.38	1.18	1.24	1.30	1.25	1.25	1.26
16000	0.40	0.43	81.89	80.41	1.14	1.25	1.26	1.27	1.22	1.24
17000	0.35	0.37	82.24	79.81	1.13	1.04	1.18	1.03	1.07	1.16
18000	0.36	0.43	79.85	78.41	1.07	1.18	1.27	1.11	1.14	1.17

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"). Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/Acknowledgments/terms.jsp](http://www.minicircuits.com/Acknowledgments/terms.jsp)



# Xtra Long Life USB/Ethernet RF SPDT

# RC-2SPDT-A18

## Typical Performance Data

TEST CONDITIONS: @Temperature = +25degC

FREQUENCY (MHz)	INSERTION LOSS ON (dB)		ISOLATION OFF (dB)		VSWR COM (:1)		VSWR COM->2 (:1)		VSWR COM->1 (:1)	
	COM-1	COM-2	COM-1	COM-2	ON	OFF	1	2	1	2
10	0.00	0.00	92.10	86.85	1.01	1.00	1.01	1.00	1.00	1.01
20	0.00	0.01	87.02	89.34	1.00	1.00	1.01	1.00	1.00	1.01
30	0.01	0.01	86.16	92.74	1.00	1.00	1.01	1.00	1.01	1.01
40	0.01	0.01	88.78	89.72	1.00	1.00	1.01	1.01	1.01	1.01
50	0.01	0.00	88.46	89.83	1.00	1.00	1.01	1.00	1.00	1.01
60	0.01	0.00	85.82	94.69	1.00	1.00	1.01	1.00	1.00	1.01
70	0.00	0.00	102.87	87.08	1.00	1.00	1.01	1.00	1.00	1.01
80	0.00	0.00	89.48	87.52	1.00	1.00	1.01	1.00	1.01	1.01
90	0.00	0.00	93.40	88.02	1.00	1.00	1.01	1.00	1.00	1.01
100	0.00	0.00	93.52	91.50	1.00	1.00	1.01	1.00	1.01	1.01
200	0.00	0.01	106.18	91.55	1.00	1.00	1.01	1.00	1.00	1.01
300	0.01	0.01	90.63	95.48	1.00	1.00	1.02	1.01	1.01	1.01
400	0.01	0.02	102.38	104.45	1.00	1.00	1.02	1.00	1.01	1.01
500	0.01	0.02	105.62	107.76	1.00	1.01	1.02	1.01	1.01	1.01
600	0.02	0.02	105.68	98.90	1.01	1.00	1.02	1.01	1.01	1.01
700	0.02	0.02	115.10	98.08	1.01	1.00	1.02	1.01	1.01	1.01
800	0.03	0.03	102.93	98.57	1.01	1.01	1.02	1.01	1.01	1.02
900	0.03	0.03	117.17	104.20	1.01	1.01	1.03	1.01	1.01	1.02
1000	0.03	0.03	106.40	105.98	1.01	1.01	1.03	1.01	1.01	1.02
1200	0.03	0.04	112.69	110.27	1.01	1.01	1.03	1.01	1.01	1.03
1400	0.04	0.04	104.16	98.33	1.01	1.01	1.04	1.01	1.01	1.03
1600	0.04	0.04	103.60	114.63	1.01	1.01	1.04	1.01	1.01	1.04
1800	0.04	0.04	118.04	108.79	1.02	1.02	1.05	1.02	1.02	1.05
2000	0.05	0.05	101.34	106.06	1.02	1.02	1.05	1.02	1.02	1.05
2200	0.05	0.05	100.29	106.05	1.02	1.02	1.06	1.02	1.02	1.06
2400	0.05	0.06	96.36	107.82	1.03	1.03	1.06	1.03	1.03	1.06
2600	0.05	0.06	115.88	98.69	1.03	1.04	1.07	1.04	1.04	1.07
2800	0.06	0.06	96.27	99.53	1.04	1.04	1.08	1.04	1.04	1.08
3000	0.06	0.06	104.94	104.37	1.05	1.04	1.08	1.05	1.04	1.09
3200	0.06	0.07	106.37	109.97	1.05	1.06	1.08	1.06	1.06	1.09
3400	0.07	0.08	101.01	97.96	1.07	1.08	1.09	1.08	1.07	1.10
3600	0.07	0.08	104.17	107.77	1.09	1.09	1.10	1.09	1.08	1.11
4000	0.08	0.09	98.07	98.02	1.11	1.12	1.10	1.12	1.11	1.12
4500	0.10	0.11	104.85	97.62	1.16	1.15	1.12	1.16	1.15	1.14
5000	0.11	0.12	98.74	100.22	1.19	1.17	1.11	1.19	1.18	1.14
5500	0.12	0.14	98.01	107.61	1.22	1.19	1.11	1.21	1.20	1.14
6000	0.13	0.15	95.10	99.02	1.22	1.21	1.11	1.22	1.21	1.13
6500	0.13	0.15	96.56	98.15	1.21	1.19	1.10	1.21	1.19	1.12
7000	0.13	0.15	98.11	98.17	1.20	1.19	1.08	1.19	1.17	1.10
7500	0.13	0.15	92.97	103.61	1.17	1.16	1.07	1.17	1.16	1.08
8000	0.13	0.15	94.86	95.93	1.15	1.14	1.08	1.16	1.14	1.07
8500	0.14	0.16	93.99	94.88	1.12	1.12	1.08	1.13	1.12	1.06
9000	0.13	0.15	94.07	94.79	1.10	1.09	1.09	1.11	1.10	1.07
9500	0.13	0.15	91.99	92.59	1.06	1.07	1.09	1.07	1.07	1.08
10000	0.14	0.16	89.93	92.53	1.05	1.06	1.11	1.07	1.06	1.09
12000	0.17	0.20	86.12	89.27	1.08	1.08	1.15	1.07	1.08	1.12
13000	0.19	0.22	84.19	87.92	1.07	1.10	1.20	1.08	1.10	1.16
14000	0.19	0.23	82.61	87.45	1.04	1.08	1.24	1.05	1.07	1.20
15000	0.21	0.25	78.53	82.92	1.03	1.05	1.24	1.02	1.04	1.21
16000	0.21	0.26	77.05	81.74	1.05	1.04	1.21	1.02	1.05	1.18
17000	0.21	0.26	77.46	80.97	1.11	1.05	1.19	1.08	1.10	1.17
18000	0.21	0.26	75.93	78.52	1.08	1.05	1.25	1.02	1.06	1.24

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"). Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/ACL/StandardTerms.jsp](http://www.minicircuits.com/ACL/StandardTerms.jsp)



# Xtra Long Life USB/Ethernet RF SPDT

# RC-2SPDT-A18

## Typical Performance Data

TEST CONDITIONS: @Temperature = +45degC

FREQUENCY (MHz)	INSERTION LOSS ON (dB)		ISOLATION OFF (dB)		VSWR COM (:1)		VSWR COM->2 (:1)		VSWR COM->1 (:1)	
	COM-1	COM-2	COM-1	COM-2	ON	OFF	1	2	1	2
10	0.00	0.00	88.55	86.13	1.01	1.01	1.00	1.00	1.03	1.00
20	0.02	0.01	89.75	94.08	1.00	1.00	1.00	1.00	1.01	1.00
30	0.01	0.02	93.74	91.46	1.00	1.00	1.00	1.00	1.00	1.00
40	0.02	0.02	90.03	93.46	1.00	1.01	1.00	1.00	1.01	1.00
50	0.03	0.01	86.76	87.61	1.00	1.00	1.00	1.00	1.00	1.00
60	0.03	0.01	87.54	85.89	1.00	1.00	1.00	1.01	1.00	1.00
70	0.03	0.01	89.45	87.50	1.01	1.00	1.00	1.01	1.00	1.00
80	0.03	0.01	85.84	88.31	1.01	1.00	1.00	1.01	1.01	1.00
90	0.03	0.01	87.92	85.22	1.01	1.01	1.00	1.01	1.01	1.01
100	0.03	0.01	86.13	88.64	1.01	1.01	1.00	1.01	1.01	1.01
200	0.03	0.01	96.32	89.20	1.00	1.00	1.00	1.01	1.01	1.01
300	0.01	0.02	103.43	97.79	1.00	1.00	1.00	1.00	1.01	1.01
400	0.01	0.02	92.09	97.00	1.01	1.01	1.00	1.01	1.01	1.01
500	0.01	0.03	98.51	99.82	1.01	1.01	1.01	1.01	1.01	1.01
600	0.00	0.03	100.83	97.87	1.01	1.00	1.01	1.01	1.01	1.01
700	0.00	0.04	111.89	102.10	1.01	1.01	1.01	1.01	1.01	1.01
800	0.01	0.04	104.33	112.55	1.01	1.01	1.01	1.01	1.01	1.01
900	0.01	0.04	110.10	100.77	1.01	1.01	1.01	1.01	1.01	1.02
1000	0.01	0.05	98.33	101.99	1.01	1.01	1.01	1.01	1.01	1.02
1200	0.01	0.05	113.65	102.23	1.01	1.00	1.02	1.00	1.01	1.02
1400	0.02	0.05	109.57	103.23	1.01	1.01	1.02	1.00	1.01	1.03
1600	0.02	0.06	107.03	103.80	1.01	1.01	1.03	1.01	1.00	1.03
1800	0.02	0.06	102.75	103.81	1.01	1.02	1.04	1.02	1.01	1.04
2000	0.03	0.06	97.66	98.82	1.02	1.02	1.05	1.01	1.02	1.04
2200	0.03	0.07	104.18	101.49	1.03	1.02	1.05	1.01	1.02	1.05
2400	0.03	0.07	109.05	98.05	1.03	1.03	1.05	1.03	1.03	1.06
2600	0.03	0.08	99.34	99.83	1.03	1.04	1.07	1.04	1.04	1.06
2800	0.03	0.08	112.58	100.46	1.05	1.05	1.08	1.04	1.05	1.07
3000	0.04	0.08	105.02	100.75	1.06	1.05	1.08	1.04	1.05	1.07
3200	0.04	0.09	102.57	102.36	1.07	1.06	1.08	1.06	1.06	1.08
3400	0.05	0.10	108.69	111.88	1.08	1.08	1.10	1.09	1.08	1.09
3600	0.05	0.10	105.09	108.11	1.09	1.10	1.11	1.08	1.10	1.09
4000	0.06	0.11	97.42	95.32	1.13	1.11	1.11	1.12	1.11	1.10
4500	0.08	0.12	99.71	101.22	1.17	1.16	1.14	1.13	1.16	1.11
5000	0.09	0.15	94.23	99.61	1.17	1.18	1.13	1.18	1.17	1.13
5500	0.10	0.15	102.91	94.28	1.21	1.19	1.15	1.18	1.19	1.12
6000	0.10	0.16	98.75	96.86	1.20	1.19	1.13	1.20	1.19	1.14
6500	0.11	0.17	98.05	99.51	1.18	1.18	1.12	1.19	1.18	1.13
7000	0.11	0.18	99.76	93.51	1.18	1.17	1.11	1.17	1.17	1.11
7500	0.12	0.18	95.18	100.18	1.14	1.16	1.08	1.17	1.16	1.10
8000	0.12	0.17	97.38	99.68	1.16	1.17	1.09	1.13	1.18	1.09
8500	0.12	0.19	96.04	96.46	1.11	1.13	1.07	1.15	1.12	1.09
9000	0.12	0.19	90.72	92.14	1.09	1.11	1.07	1.09	1.11	1.07
9500	0.12	0.18	97.14	92.87	1.08	1.08	1.08	1.07	1.06	1.07
10000	0.13	0.19	93.08	89.62	1.03	1.08	1.07	1.07	1.08	1.07
12000	0.16	0.24	93.32	86.87	1.14	1.15	1.15	1.10	1.14	1.11
13000	0.18	0.27	87.24	87.98	1.17	1.16	1.21	1.12	1.16	1.15
14000	0.18	0.29	84.70	85.74	1.10	1.13	1.26	1.10	1.12	1.19
15000	0.18	0.31	82.39	82.93	1.02	1.07	1.26	1.09	1.06	1.20
16000	0.18	0.34	81.36	79.86	1.04	1.07	1.22	1.07	1.09	1.19
17000	0.17	0.34	78.55	80.54	1.08	1.05	1.27	1.10	1.11	1.21
18000	0.17	0.38	77.29	78.02	1.23	1.19	1.35	1.17	1.22	1.22

**Notes**






- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"). Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/AcCLSales/terms.jsp](http://www.minicircuits.com/AcCLSales/terms.jsp)



# Xtra Long Life USB/Ethernet RF SPDT Switch

## RC-2SPDT-A18

### Typical Performance Curves

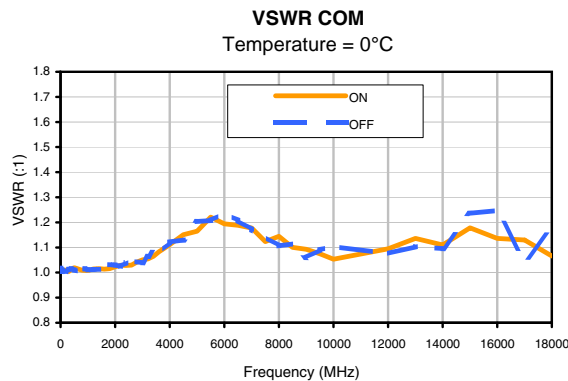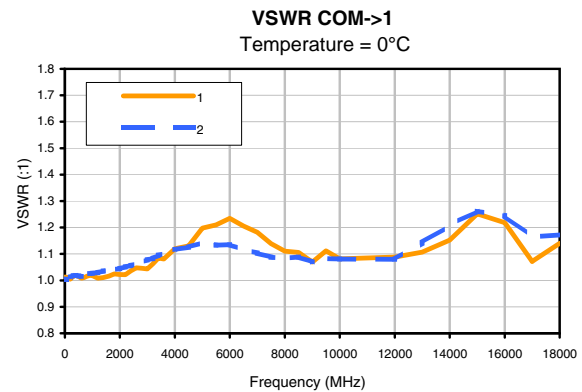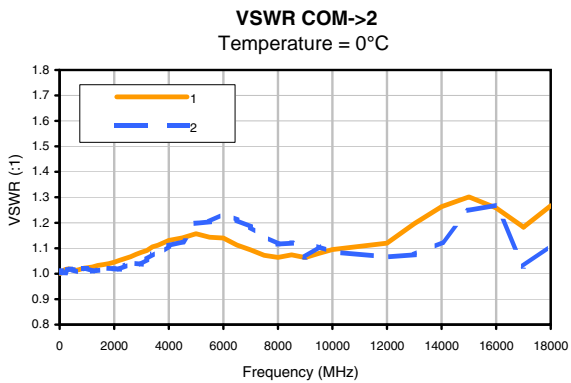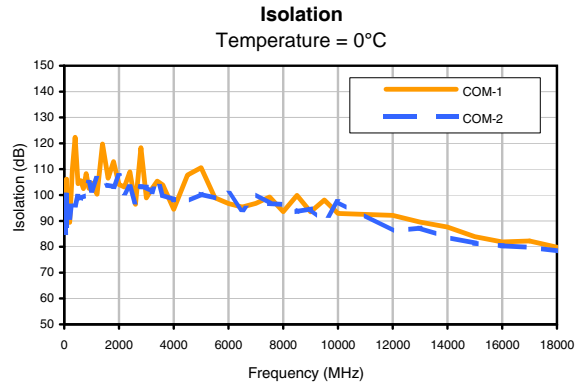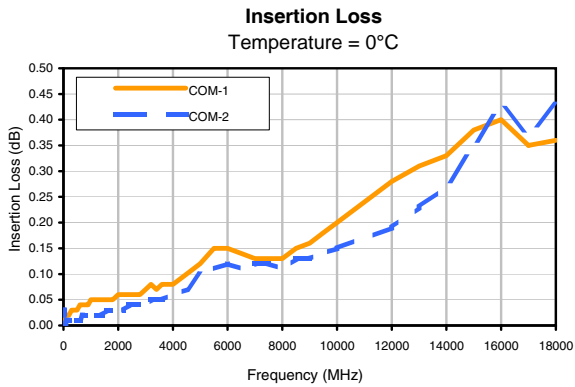






**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"). Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/AKCLStore/terms.jsp](http://www.minicircuits.com/AKCLStore/terms.jsp)

# Xtra Long Life USB/Ethernet RF SPDT Switch

## RC-2SPDT-A18

### Typical Performance Curves

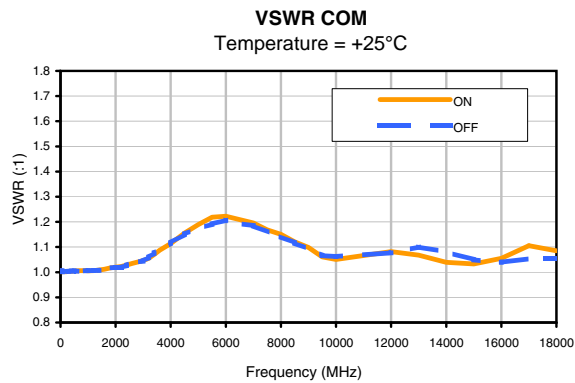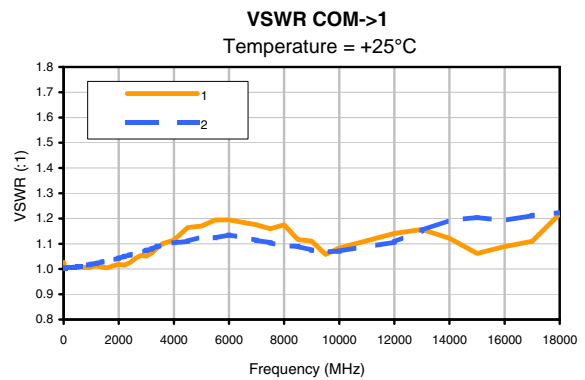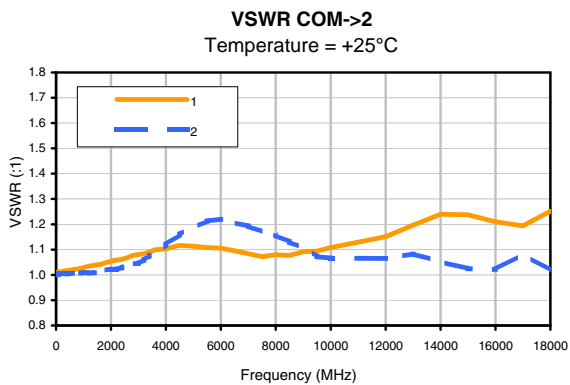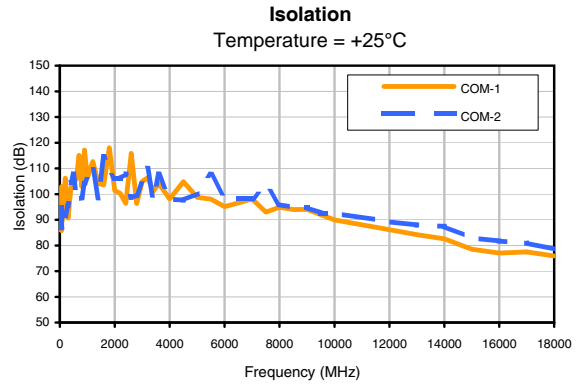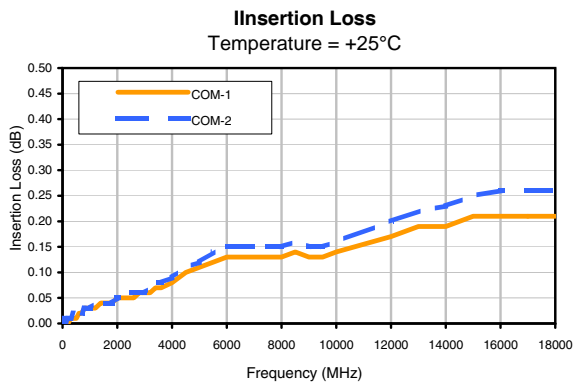






**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/AKCLStore/terms.jsp](http://www.minicircuits.com/AKCLStore/terms.jsp)

# Xtra Long Life USB/Ethernet RF SPDT Switch

## RC-2SPDT-A18

### Typical Performance Curves

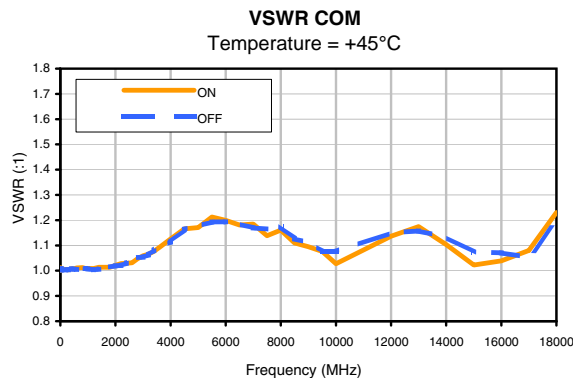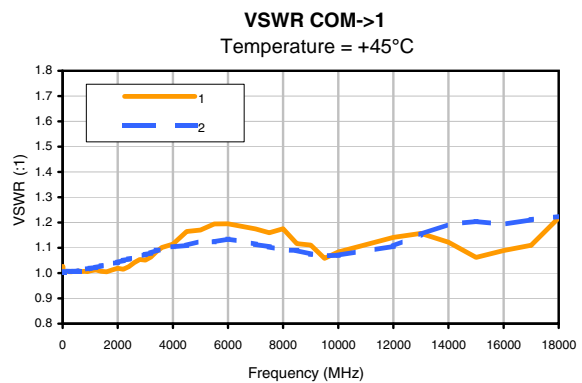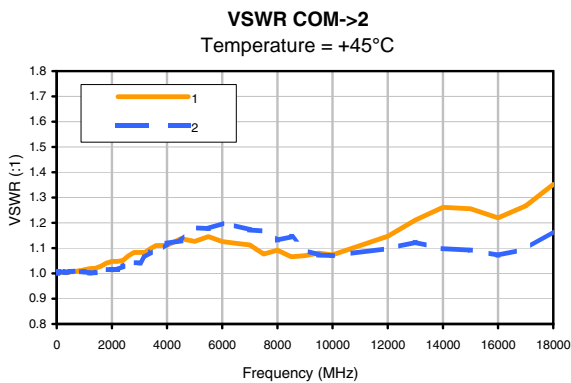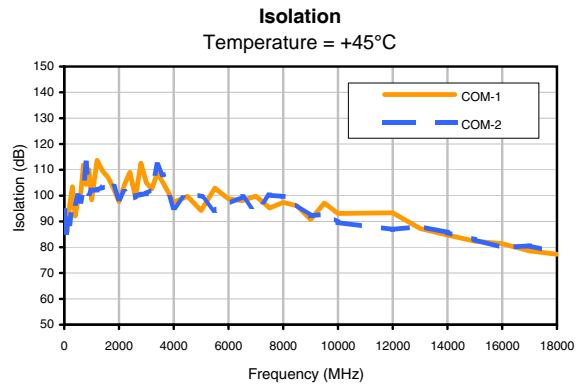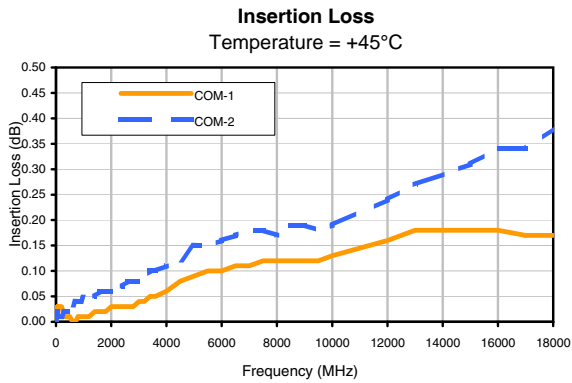


**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/AKCLStore/terms.jsp](http://www.minicircuits.com/AKCLStore/terms.jsp)




## Outline Dimensions


LM1849

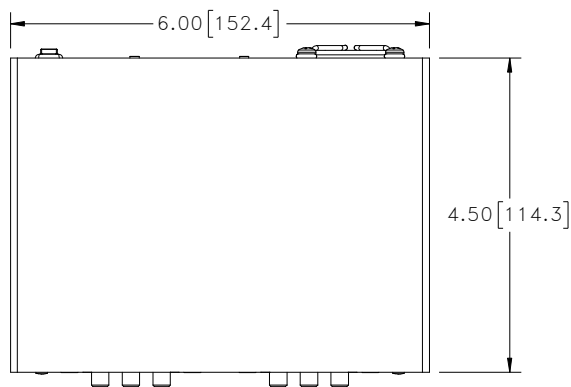

TOP VIEW

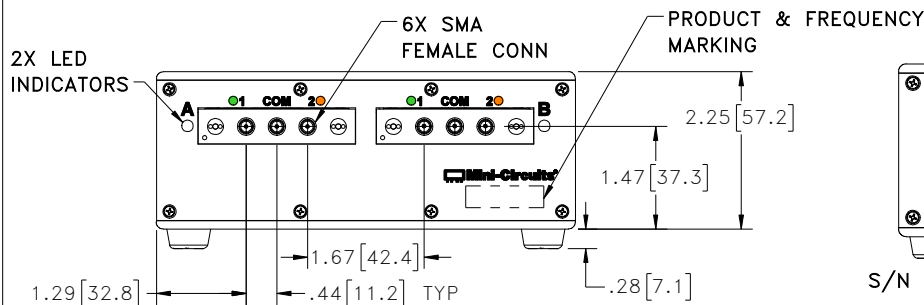


FRONT VIEW

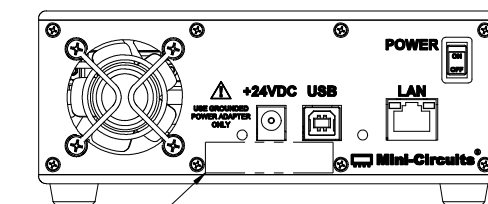

REAR VIEW

BRACKET OPTION  
ONE SET OF 2 EACH

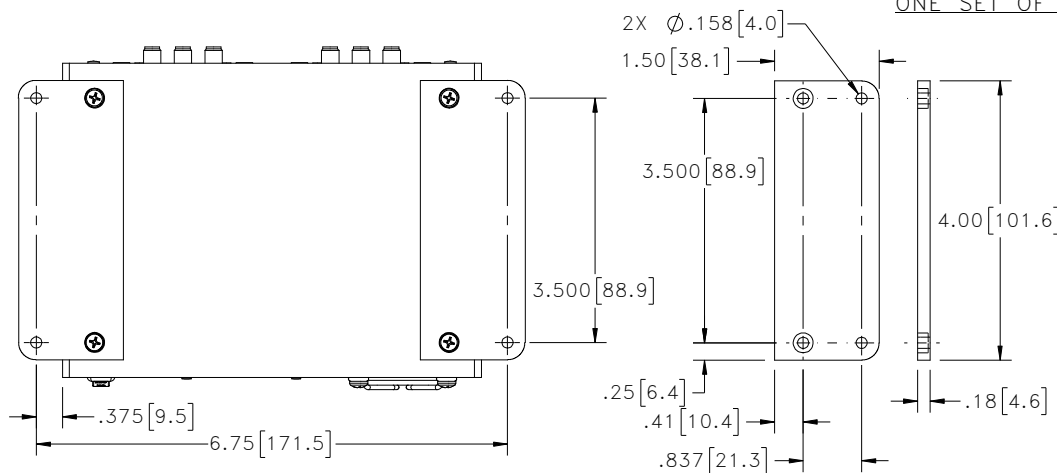

BOTTOM VIEW

SHOWN WITH RUBBER FEET REMOVED AND BRACKETS INSTALLED.

INSTRUCTIONS FOR MOUNTING BRACKETS:

TOOL REQUIRED: PHILLIPS HEAD SCREWDRIVER

STEP 1: REMOVE RUBBER FEET FROM THE BOTTOM OF THE UNIT, DO NOT DISCARD THE FASTENERS.

STEP 2: MOUNT THE BRACKETS WITH THE FASTENERS REMOVED IN STEP 1, USING THE COUNTER BORE HOLES IN THE BRACKET.

### Notes:

1. Case material: Aluminum (with protective coating to prevent corrosion).
2. Dimensions are in inches [mm]. Tolerances: 2 Pl.  $\pm .03$  inch; 3 Pl.  $\pm .015$  inch.
3. Weight: 980 grams.
4. Marking may contain other features or characters for internal lot control.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	0° to 40° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-15° to 85°C Ambient Environment	Individual Model Data Sheet
Operating and Storage Humidity	5% to 85% RH (non-condensing)	Ambient
Bench Handling Test	Bench Top Tip 45° & Drop	MIL-PRF-28800F
Transit Drop Test	Free Fall Drop, 20 cm (7.9 inches)	MIL-PRF-28800F class 3