

Coaxial Amplifier

ZX60-2522MA+

50Ω High Isolation 0.5 to 2.5 GHz

Features

- From 2.8V to 5V operation
- Wide bandwidth, 0.5 to 2.5 GHz
- High active directivity
- Output power, up to 20 dBm typ.
- Protected by US patent 6,790,049

Applications

- Buffer amplifier
- LO amplifiers for mixers
- Cellular
- PCN



CASE STYLE: GC957

Connectors	Model
SMA	ZX60-2522MA-S+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications $T_{AMB}=25^{\circ}\text{C}$

MODEL NO.	FREQ. (GHz)		DC VOLTS (V)	GAIN, dB Typical					Min. at 2 GHz	MAXIMUM POWER (dBm)		DYNAMIC RANGE			VSWR* (:1) Typ.		ACTIVE DIRECTIVITY (dB) (Isolation-Gain) Typ.		DC OPERATING CURRENT @ Pin V+ (mA)			
	f_L	f_U		over frequency, GHz						f_L	f_U	NF (dB) Typ.	IP3 (dBm) Typ.	at 1 GHz	at 1 GHz	at 2 GHz	In	Out	f_L	f_U	Typ	Max.
	0.5	2.5		0.5	1.0	1.5	2.0	2.5		20.5	19.5	2.6	32	30	1.4	1.3	21	13	94	110		
ZX60-2522MA+	0.5	2.5	5.0 2.8	22.6	25	25.2	24.3	22.6	21.5	20.5	19.5	2.6	32	30	1.4	1.3	21	13	94	110		
				20.9	22.6	22.6	21.3	19.9	—	12.5	14	2.6	24	25	1.4	1.4	24	14	88	—		


* at 1.1 GHz - 2.5 GHz

Maximum Ratings

Operating Temperature	-40°C to 85°C case
Storage Temperature	-55°C to 100°C
DC Voltage	7V at V+, 1V at input and output
Input Power (No damage)	10 dBm (continuous operation) 26 dBm (5 minutes max.)
Power Dissipation	970 mW

Permanent damage may occur if any of these limits are exceeded.

Outline Drawing

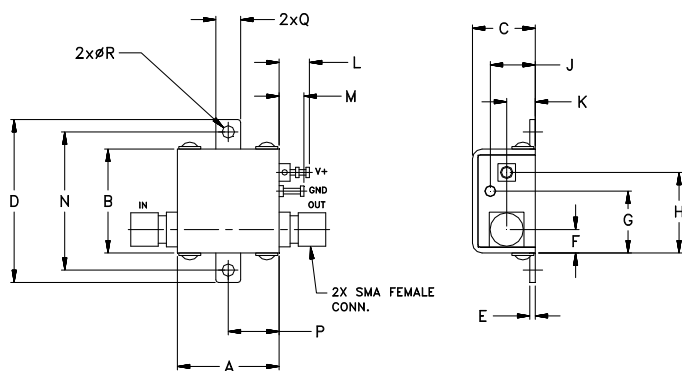

! NOTE: When soldering the DC connections, caution must be used to avoid overheating the DC terminal. See Application Note. [AN-40-010](#).

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	wt
.74	.75	.46	1.18	.04	.17	.45	.59	.33	.21	.22	.18	1.00	.37	.18	.106	grams
18.80	19.05	11.68	29.97	1.02	4.32	11.43	14.99	8.38	5.33	5.59	4.57	25.40	9.40	4.57	2.69	23.0

Notes







- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M166315
ZX60-2522MA+
RVN/TD/CP/AM
180215
Page 1 of 2

FREQUENCY (MHz)	GAIN (dB)		DIRECTIVITY (dB)		VSWR IN (:1)		VSWR OUT (:1)		POUT at 1 dB COMPR. (dBm)		NOISE FIGURE (dB)	
	2.8V	5V	2.8V	5V	2.8V	5V	2.8V	5V	2.8V	5V	2.8V	5V
500	20.70	22.49	26.16	22.95	2.75	2.99	1.89	1.75	12.36	20.94	3.25	3.18
600	21.63	23.63	25.18	22.99	2.19	2.33	1.66	1.50	12.79	21.13	2.97	2.88
700	22.08	24.25	23.92	22.42	1.88	1.96	1.53	1.33	12.78	21.04	2.88	2.78
800	22.31	24.61	22.53	21.86	1.70	1.73	1.44	1.22	13.12	21.11	2.77	2.68
900	22.43	24.85	21.41	21.06	1.58	1.59	1.40	1.13	12.80	20.72	2.71	2.65
1000	22.49	25.00	20.36	20.08	1.50	1.49	1.36	1.07	13.02	20.86	2.74	2.66
1100	22.51	25.10	19.71	19.35	1.45	1.42	1.35	1.03	13.28	20.86	2.68	2.60
1300	22.44	25.19	18.15	17.81	1.39	1.34	1.35	1.08	13.19	20.73	2.72	2.65
1500	22.27	25.13	17.00	16.50	1.36	1.30	1.36	1.14	13.11	20.56	2.69	2.60
1600	22.14	25.05	16.52	16.05	1.35	1.29	1.37	1.18	13.33	20.44	2.63	2.60
1800	21.82	24.76	15.79	15.36	1.35	1.29	1.39	1.22	13.54	20.27	2.71	2.64
2000	21.42	24.33	15.35	14.84	1.35	1.30	1.40	1.26	13.46	20.07	2.67	2.59
2200	20.94	23.75	14.83	14.77	1.36	1.32	1.41	1.28	13.62	19.81	2.64	2.58
2400	20.40	23.06	14.78	14.63	1.37	1.35	1.41	1.29	13.46	19.79	2.72	2.62
2500	20.11	22.69	14.66	14.66	1.38	1.37	1.40	1.29	13.71	19.77	2.79	2.69

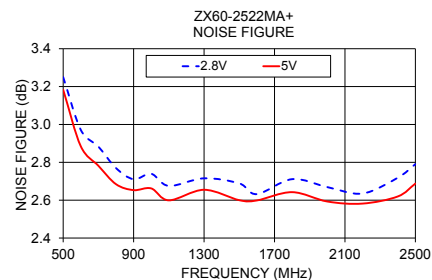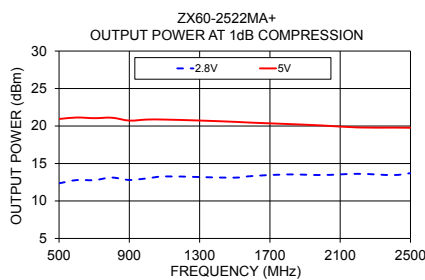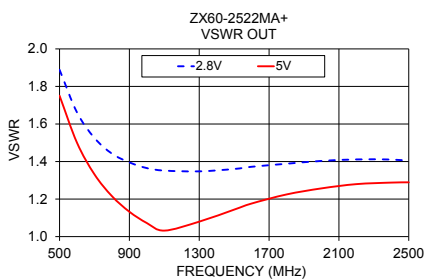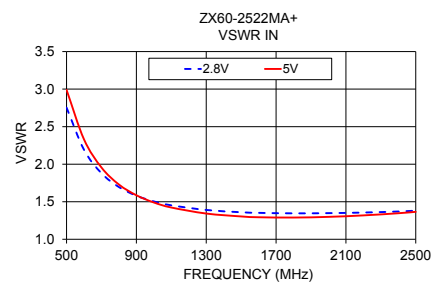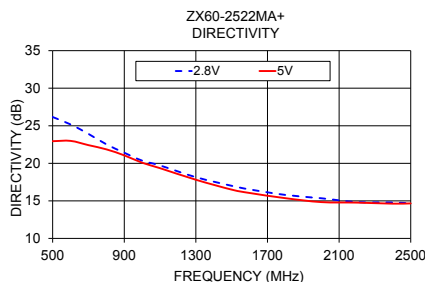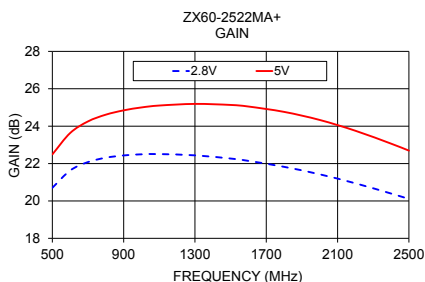

Notes







- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Typical Performance Data

FREQ. (MHz)	GAIN		DIRECTIVITY		VSWR IN		VSWR OUT		POWER OUT @ 1dB COMPRESSION		IP3		NF	
	(dB)		(dB)		(:1)		(:1)		(dBm)		(dBm)		(dB)	
	2.8V	5V	2.8V	5V	2.8V	5V	2.8V	5V	2.8V	5V	2.8V	5V	2.8V	5V
500	20.70	22.49	26.16	22.95	2.75	2.99	1.89	1.75	12.36	20.94	24.12	33.41	3.25	3.18
550	21.25	23.15	25.14	22.36	2.43	2.61	1.76	1.62	12.51	21.06	23.96	33.63	3.14	3.06
600	21.63	23.63	25.18	22.99	2.19	2.33	1.66	1.50	12.79	21.13	24.32	33.45	2.97	2.88
650	21.89	23.99	24.87	22.82	2.01	2.12	1.58	1.41	12.94	21.23	24.40	33.51	2.93	2.88
700	22.08	24.25	23.92	22.42	1.88	1.96	1.53	1.33	12.78	21.04	24.16	33.41	2.88	2.78
800	22.31	24.61	22.53	21.86	1.70	1.73	1.44	1.22	13.12	21.11	24.62	32.95	2.77	2.68
900	22.43	24.85	21.41	21.06	1.58	1.59	1.40	1.13	12.80	20.72	24.04	32.52	2.71	2.65
1000	22.49	25.00	20.36	20.08	1.50	1.49	1.36	1.07	13.02	20.86	24.32	32.48	2.74	2.66
1100	22.51	25.10	19.71	19.35	1.45	1.42	1.35	1.03	13.28	20.86	24.67	32.25	2.68	2.60
1300	22.44	25.19	18.15	17.81	1.39	1.34	1.35	1.08	13.19	20.73	24.41	31.95	2.72	2.65
1400	22.36	25.18	17.42	17.10	1.37	1.32	1.36	1.11	13.24	20.57	24.43	31.50	2.70	2.64
1500	22.27	25.13	17.00	16.50	1.36	1.30	1.36	1.14	13.11	20.56	24.13	31.19	2.69	2.60
1600	22.14	25.05	16.52	16.05	1.35	1.29	1.37	1.18	13.33	20.44	24.58	31.25	2.63	2.60
1800	21.82	24.76	15.79	15.36	1.35	1.29	1.39	1.22	13.54	20.27	24.74	30.61	2.71	2.64
2000	21.42	24.33	15.35	14.84	1.35	1.30	1.40	1.26	13.46	20.07	24.68	30.48	2.67	2.59
2200	20.94	23.75	14.83	14.77	1.36	1.32	1.41	1.28	13.62	19.81	24.69	29.92	2.64	2.58
2300	20.68	23.42	14.76	14.63	1.36	1.33	1.41	1.29	13.72	19.75	24.82	29.95	2.76	2.64
2400	20.40	23.06	14.78	14.63	1.37	1.35	1.41	1.29	13.46	19.79	24.53	29.83	2.72	2.62
2450	20.25	22.88	14.69	14.79	1.38	1.36	1.41	1.29	13.85	19.69	24.92	29.92	2.73	2.61
2500	20.11	22.69	14.66	14.66	1.38	1.37	1.40	1.29	13.71	19.77	24.98	30.09	2.79	2.69

Typical Performance Curves

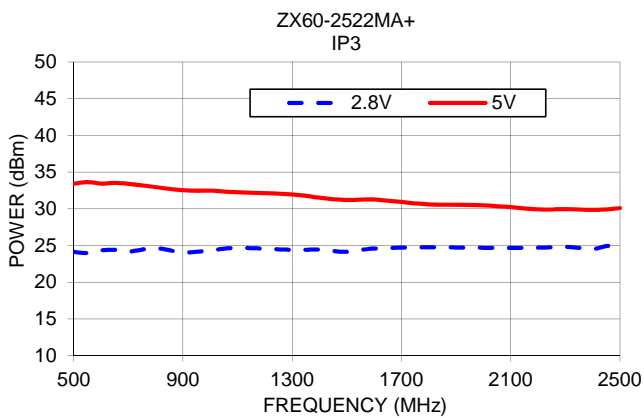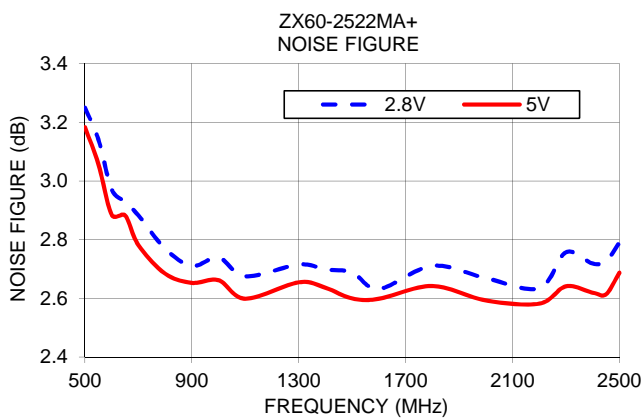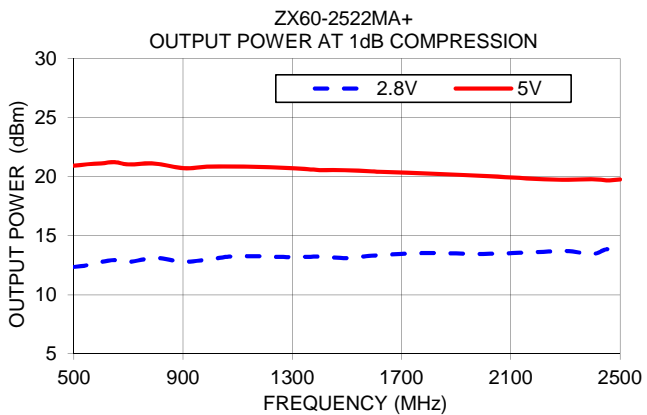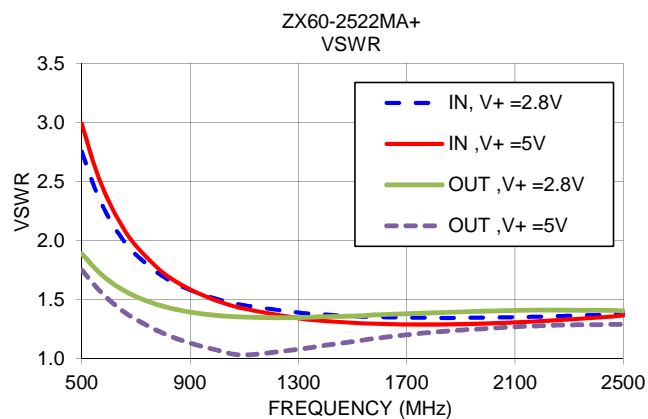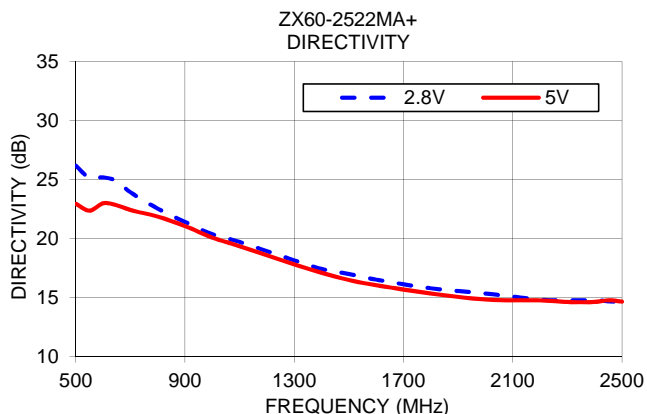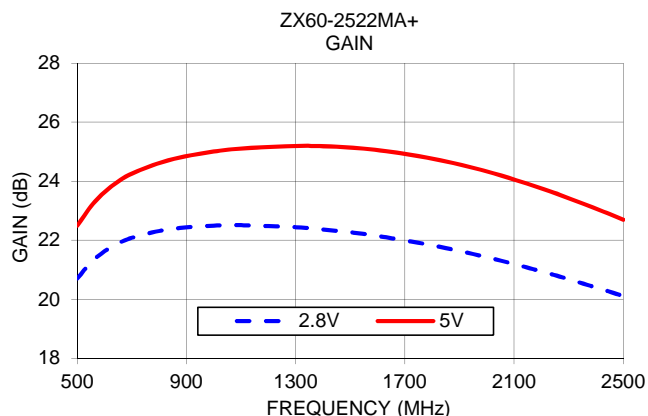


Case Style

GC

Outline Dimensions

GC957

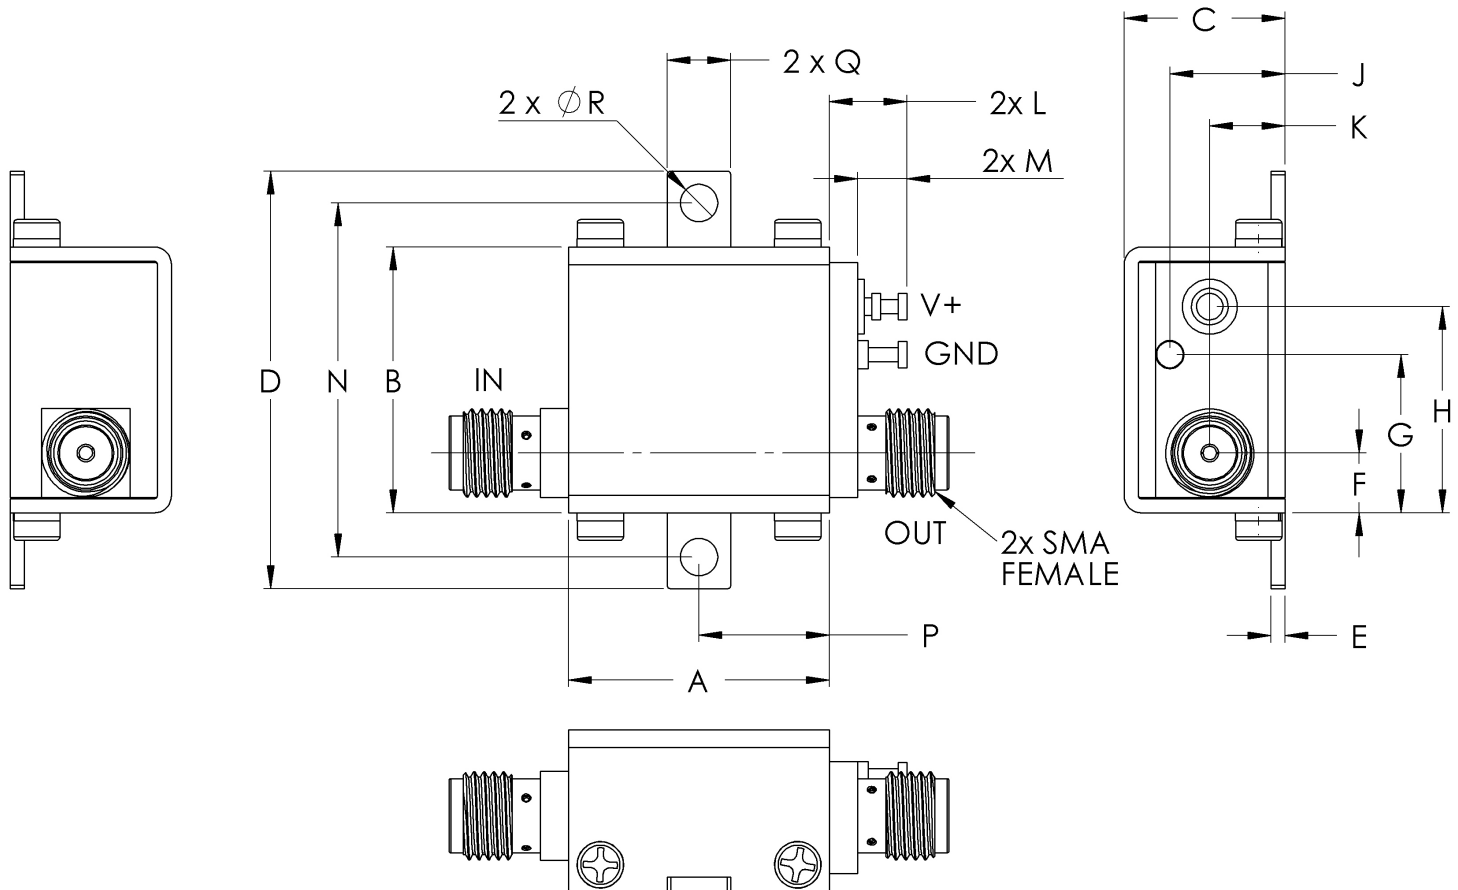

CASE #.	A	B	C	D	E	F	G	H	J	K	L	M	N
GC957	.74 (18.80)	.75 (19.15)	.46 (11.61)	1.18 (30.07)	.04 (1.02)	.17 (4.32)	.45 (11.40)	.59 (14.86)	.33 (8.31)	.21 (5.44)	.22 (5.59)	.14 (3.56)	1.00 (25.4)

CASE #.	P	Q	R	WT GRAMS
GC957	.37 (9.40)	.18 (4.57)	.106 (2.69)	23.0

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .03$; 3Pl. $\pm .015$
Tolerance on hole size and interaxes dimensions to be $\pm .005$.

Note:

1. Case material: Brass
2. Case finish: Nickel plate

Mini-Circuits[®]

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85° C Case Temperature	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Stabilization Bake	(non-operating) 125°C, 24 hours	- - -
Burn-in at Elevated Temp.	(DC on) 160 hours at 85° C	MIL-STD-202, Method 108
Thermal Shock	-55° to 100°C, 5 cycles	MIL-STD-202, Method 107, Condition A, except 100°C